



# COOLANT REPORT

Sample Rating Trend

**WEAR**



Machine Id  
**KOHLER Franklin Gardebs**

Component  
**Bottom Coolant**

Fluid  
**CONVENTIONAL COOLANT (--- GAL)**



## DIAGNOSIS

### ▲ Recommendation

We recommend drain system, and refill with 50/50 antifreeze water mixture. We advise that you replenish the supplemental coolant additives (SCAs) and add per manufacturer's specifications. We recommend an early resample to monitor this condition.

### ▲ Corrosion

Lead ppm levels are abnormal. The high metal levels indicate corrosion in the system.

### Contaminants

There is no indication of any contamination in the coolant.

### Coolant Condition

The nitrite level is acceptable. The pH level of this fluid is within the acceptable limits.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0870001</b>	---	---
Sample Date	Client Info	<b>12 Mar 2024</b>	---	---
Machine Age	hrs	<b>880</b>	---	---
Oil Age	hrs	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## PHYSICAL TEST RESULTS

method	limit/base	current	history1	history2
Glycol Type	FT-IR	<b>UNK</b>	---	---
Specific Gravity	ASTM D1298*	<b>1.071</b>	---	---
pH	Scale 0-14	<b>8.81</b>	---	---
Nitrites	ppm	<b>1400</b>	---	---
Reserve Alkalinity	Scale 0-20	<b>2.8</b>	---	---
Percentage Glycol	%	<b>53.2</b>	---	---
Freezing Point	°C	<b>-42</b>	---	---
Carboxylate		<b>---</b>	---	---

## CORROSION INHIBITORS

method	limit/base	current	history1	history2
Silicon	ppm	<b>32</b>	---	---
Phosphorus	ppm	<b>87</b>	---	---
Boron	ppm	<b>194</b>	---	---
Molybdenum	ppm	<b>0</b>	---	---

## CORROSION

method	limit/base	current	history1	history2
Iron	ppm	<b>0</b>	---	---
Aluminum	ppm	<b>&lt;1</b>	---	---
Copper	ppm	<b>&lt;1</b>	---	---
Lead	ppm	<b>▲ 17</b>	---	---
Tin	ppm	<b>0</b>	---	---
Silver	ppm	<b>1</b>	---	---
Zinc	ppm	<b>&lt;1</b>	---	---

## CARRIER SALTS

method	limit/base	current	history1	history2
Sodium	ppm	<b>1917</b>	---	---
Potassium	ppm	<b>1199</b>	---	---


## SCALE POTENTIAL

method	limit/base	current	history1	history2
Calcium	ppm	<b>&lt;1</b>	---	---
Magnesium	ppm	<b>&lt;1</b>	---	---
Hardness	mg/L CaCO3	<b>5</b>	---	---




# COOLANT REPORT

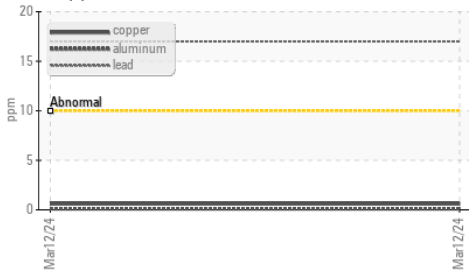

▲ Copper/Aluminum/Lead

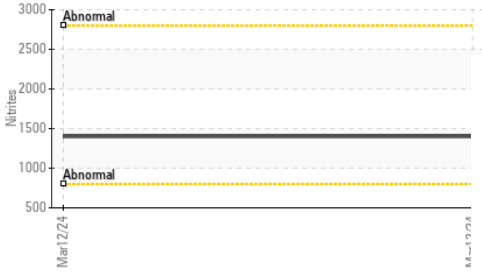

Nitrites



VISUAL	method	limit/base	current	history1	history2
--------	--------	------------	---------	----------	----------


Coolant Color	Visual*	Green	<b>Green</b>	---	---
Coolant Appearance	Visual*	Clear	<b>Clear</b>	---	---
Color				no image	no image
Bottom				no image	no image

## GRAPHS


Iron/Tin/Silver




Reserve Alkalinity

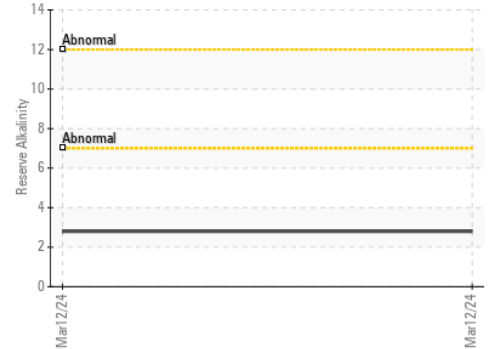


▲ Copper/Aluminum/Lead

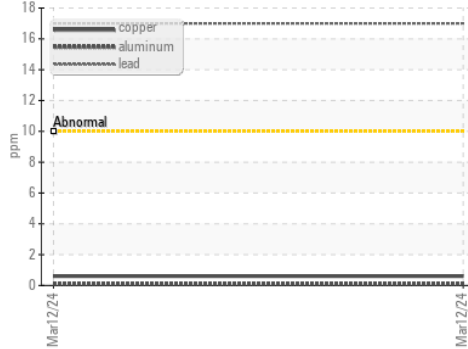


Freeze Point

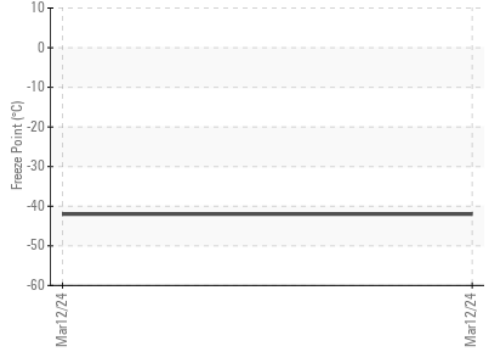

pH

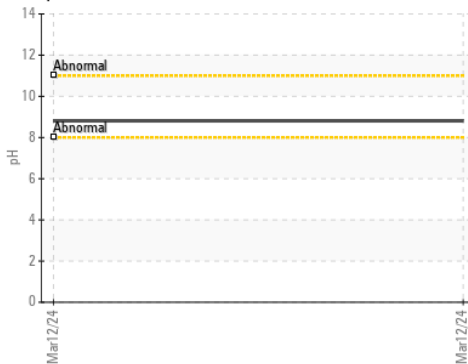

Nitrites

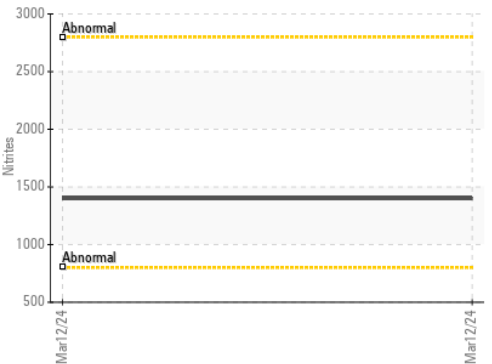

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

**Sample No.** : WC0870001

**Lab Number** : 02622150

**Unique Number** : 5747269

**Test Package** : COOL ( Additional Tests: GlycolType )

**Received** : 14 Mar 2024

**Tested** : 14 Mar 2024

**Diagnosed** : 15 Mar 2024 - Kevin Marson

**CF Industrial Products Inc.**

1928 Road 3 East

Kingsville, ON

CA N9Y 2E5

Contact: Dan Hammond

danh@cfgroups.com

T: (519)564-2241

F: (519)322-2916

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.