



# OIL ANALYSIS REPORT

Sample Rating Trend


**NORMAL**



Area  
**BD SHOP**  
Machine Id  
**200287**

Component  
**Diesel Engine**  
Fluid

**PETRO CANADA DURON SHP 10W30 (40 LTR)**

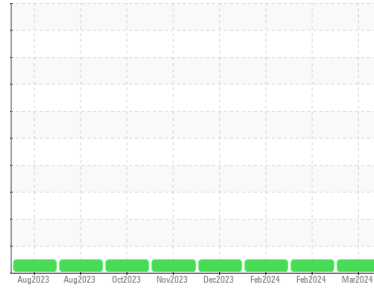

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0888908</b>	WC0888894	WC0888895
Sample Date	Client Info			<b>16 Mar 2024</b>	05 Feb 2024	05 Feb 2024
Machine Age	kms	Client Info		<b>193761</b>	181123	181124
Oil Age	kms	Client Info		<b>12637</b>	58589	1
Oil Changed	Client Info			<b>Not Chngd</b>	Not Chngd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>200	<b>12</b>	33	5
Chromium	ppm	ASTM D5185(m)	>6	<b>&lt;1</b>	2	0
Nickel	ppm	ASTM D5185(m)	>3	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>50	<b>4</b>	11	2
Lead	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185(m)	>50	<b>25</b>	43	6
Tin	ppm	ASTM D5185(m)	>6	<b>0</b>	<1	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	2	<b>5</b>	3	6
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	50	<b>59</b>	62	57
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185(m)	950	<b>945</b>	981	913
Calcium	ppm	ASTM D5185(m)	1050	<b>1086</b>	1145	1034
Phosphorus	ppm	ASTM D5185(m)	995	<b>1019</b>	976	986
Zinc	ppm	ASTM D5185(m)	1180	<b>1145</b>	1193	1115
Sulfur	ppm	ASTM D5185(m)	2600	<b>2628</b>	1974	2604
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	<b>3</b>	5	4
Sodium	ppm	ASTM D5185(m)		<b>1</b>	2	<1
Potassium	ppm	ASTM D5185(m)	>20	<b>6</b>	26	4

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0.3</b>	0.8	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>6.1</b>	9.0	4.9
Nitration(Diff)	Abs/cm	ASTM E2412*		<b>3.7</b>	10.6	1
Sulfation	Abs.:1mm	ASTM D7415*	>30	<b>19.1</b>	21.7	18.2
Sulfation(Diff)	Abs/cm	ASTM E2412*		<b>1.6</b>	6	0



# OIL ANALYSIS REPORT







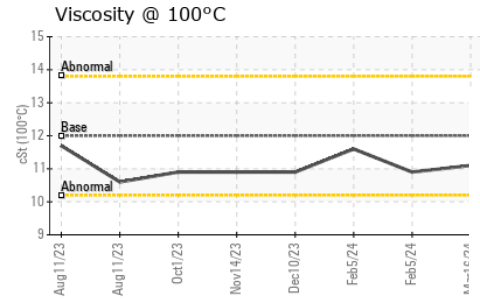
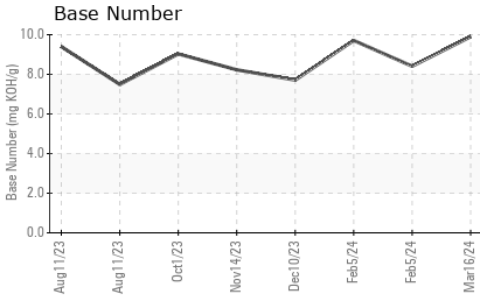


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	14.0	17.8	13.4
Oxidation(Diff)	Abs/cm	ASTM E2412*		5.1	13.4	1.5
Base Number (BN)	mg KOH/g	ASTM D2896*		9.90	8.41	9.71

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.1	10.9	11.6

## GRAPHS

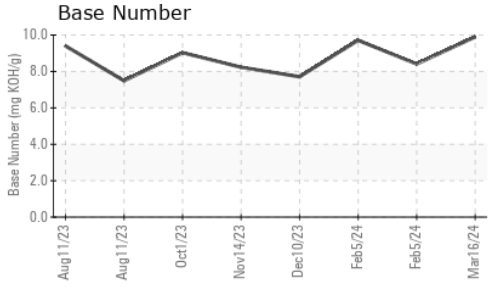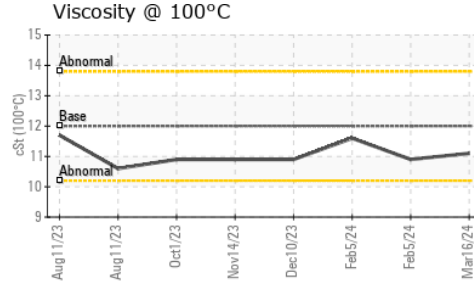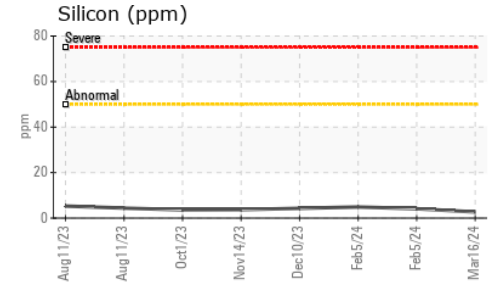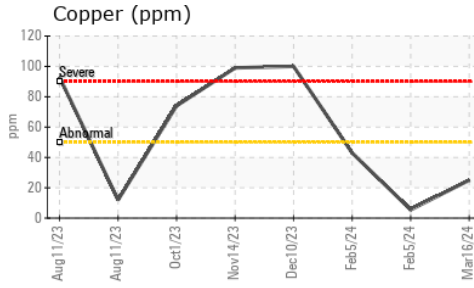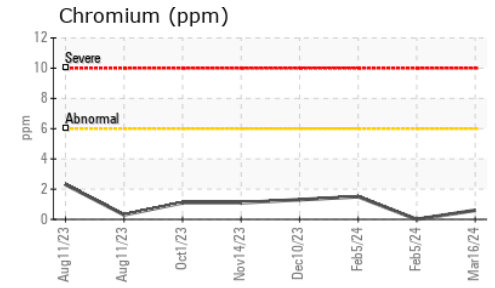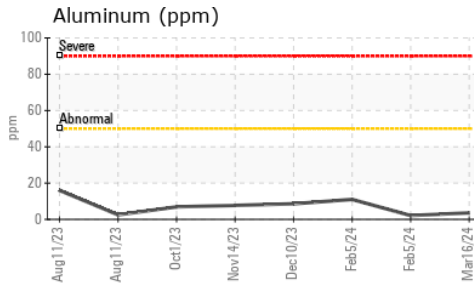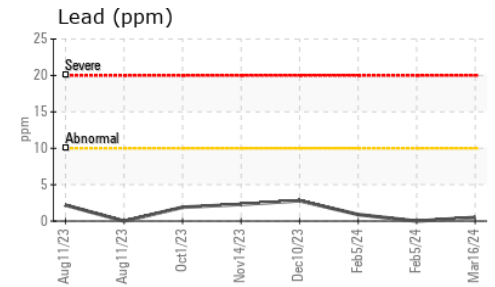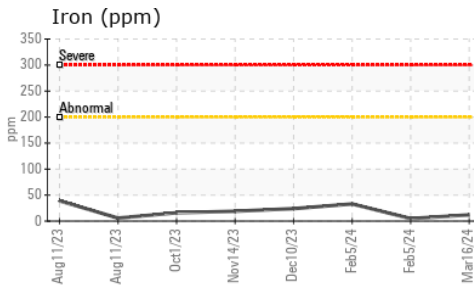

ISO 17025:2017  
Accredited  
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
 Sample No. : WC0888908 Received : 18 Mar 2024  
 Lab Number : 02622585 Tested : 18 Mar 2024  
 Unique Number : 5747704 Diagnosed : 19 Mar 2024 - Kevin Marson  
 Test Package : MOB 2 ( Additional Tests: FT-IR(Diff) )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**WFR Technical Services**  
 5389 Riverside Drive  
 Burlington, ON  
 CA L7L 3Y1  
 Contact: William Ridley  
 wfr.technical.services@gmail.com

T:  
F: