




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

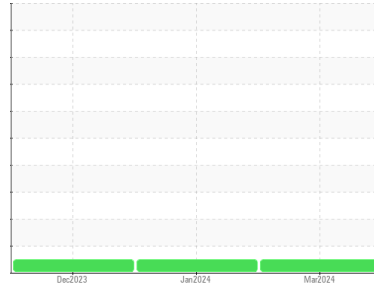

Machine Id  
**2370**

Component  
**Natural Gas Engine**

Fluid  
**VALVOLINE PREMIUM BLUE 9200 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0917636</b>	WC0891084	WC0877970
Sample Date	Client Info		<b>13 Mar 2024</b>	25 Jan 2024	12 Dec 2023
Machine Age	kms	Client Info	<b>31198</b>	206868	11154
Oil Age	kms	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>50	<b>9</b>	11	41
Chromium	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>9	<b>2</b>	2	3
Lead	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	<1	2
Copper	ppm	ASTM D5185(m)	>35	<b>2</b>	3	13
Tin	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>6</b>	7	12
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185(m)		<b>53</b>	54	94
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	7
Magnesium	ppm	ASTM D5185(m)		<b>758</b>	706	582
Calcium	ppm	ASTM D5185(m)		<b>1225</b>	1167	1157
Phosphorus	ppm	ASTM D5185(m)		<b>627</b>	591	561
Zinc	ppm	ASTM D5185(m)		<b>814</b>	780	623
Sulfur	ppm	ASTM D5185(m)		<b>2015</b>	1938	1837
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>+100	<b>6</b>	8	36
Sodium	ppm	ASTM D5185(m)		<b>2</b>	4	3
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1

## INFRA-RED


	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>12.3</b>	12.1	8.2
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>24.0</b>	23.0	20.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>20.9</b>	20.1	15.5











# OIL ANALYSIS REPORT

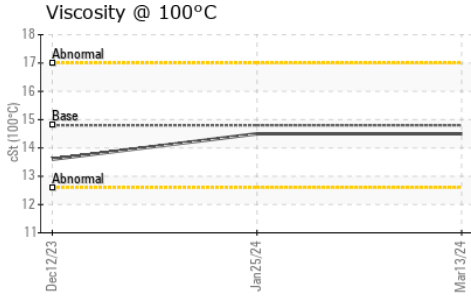

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	---	NONE
Yellow Metal	scalar	Visual*	NONE	---	NONE
Precipitate	scalar	Visual*	NONE	---	NONE
Silt	scalar	Visual*	NONE	---	NONE
Debris	scalar	Visual*	NONE	---	NONE
Sand/Dirt	scalar	Visual*	NONE	---	NONE
Appearance	scalar	Visual*	NORML	---	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	14.5	13.6

## GRAPHS

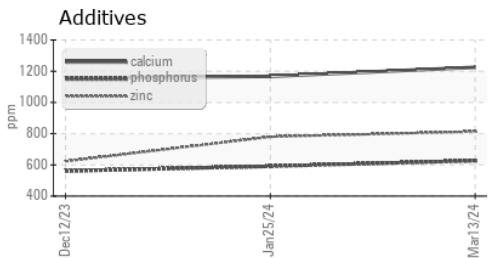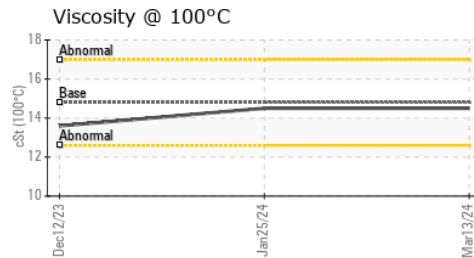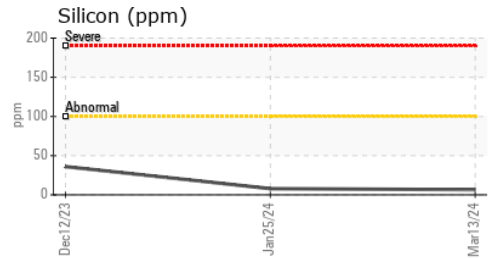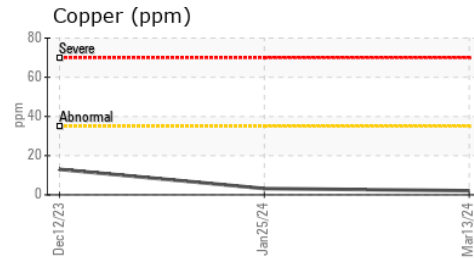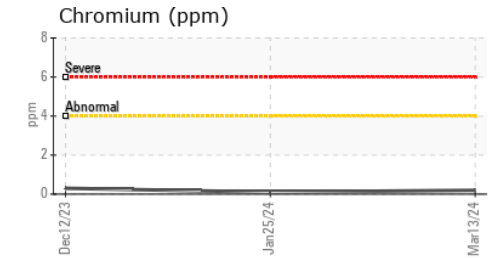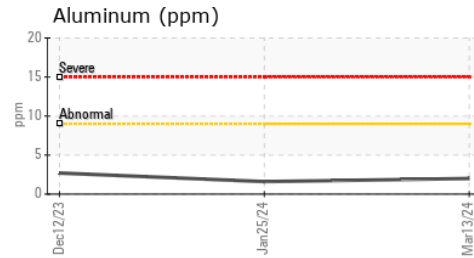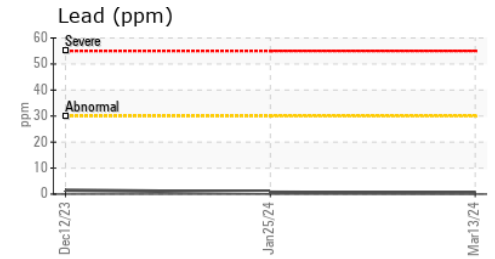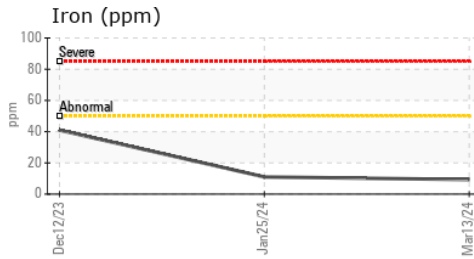

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0917636 **Received** : 18 Mar 2024  
**Lab Number** : 02622659 **Tested** : 18 Mar 2024  
**Unique Number** : 5747778 **Diagnosed** : 18 Mar 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: Visual )

**CITY OF HAMILTON**  
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM  
 MOUNT HOPE, ON  
 CA L0R 1W0  
 Contact: Jeff Parr  
 jeff.parr@hamilton.ca  
 T: (905)546-2424  
 F: (905)679-4502

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.