




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

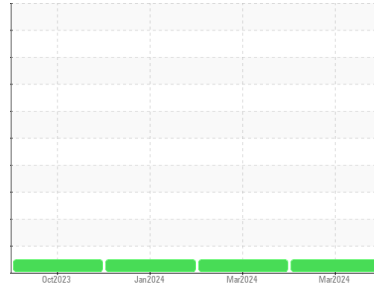

Machine Id  
**2355**

Component  
**Natural Gas Engine**

Fluid  
**VALVOLINE PREMIUM BLUE 9200 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0917639</b>	WC0917401	WC0891089
Sample Date	Client Info			<b>12 Mar 2024</b>	11 Mar 2024	24 Jan 2024
Machine Age	kms	Client Info		<b>41252</b>	410892	31535
Oil Age	kms	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>50	<b>2</b>	8	10
Chromium	ppm	ASTM D5185(m)	>4	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>9	<b>1</b>	1	2
Lead	ppm	ASTM D5185(m)	>30	<b>0</b>	1	<1
Copper	ppm	ASTM D5185(m)	>35	<b>&lt;1</b>	2	2
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>42</b>	8	8
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>46</b>	51	53
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)		<b>767</b>	736	747
Calcium	ppm	ASTM D5185(m)		<b>1153</b>	1181	1206
Phosphorus	ppm	ASTM D5185(m)		<b>681</b>	602	610
Zinc	ppm	ASTM D5185(m)		<b>762</b>	805	810
Sulfur	ppm	ASTM D5185(m)		<b>2019</b>	1954	2016
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>+100	<b>3</b>	6	7
Sodium	ppm	ASTM D5185(m)		<b>2</b>	5	2
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*		<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>6.5</b>	12.3	12.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>20.6</b>	23.1	23.0

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>16.5</b>	20.3	20.4











# OIL ANALYSIS REPORT

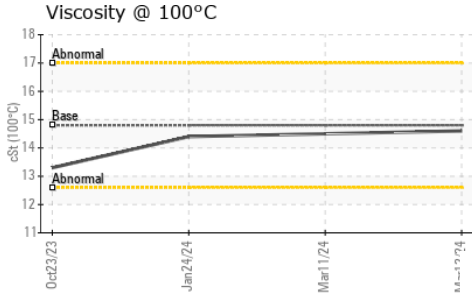

VISUAL	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	14.6	14.5

## GRAPHS

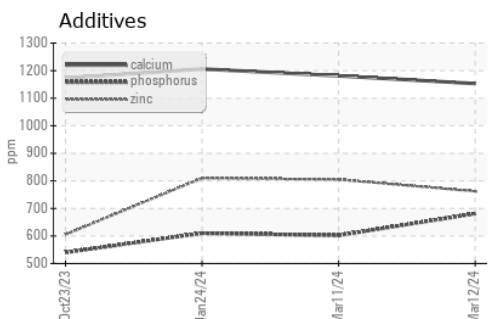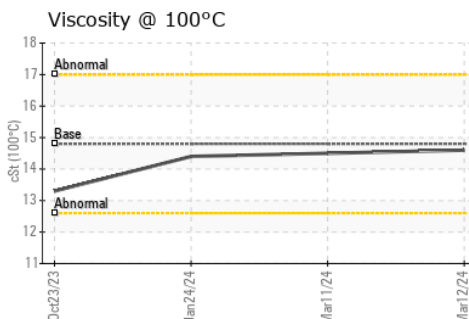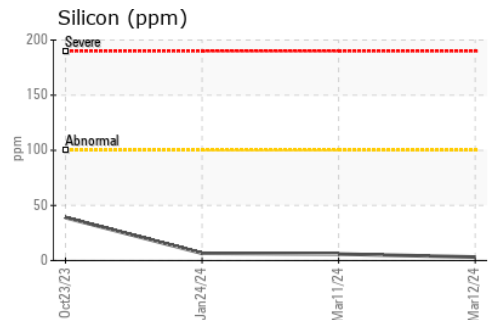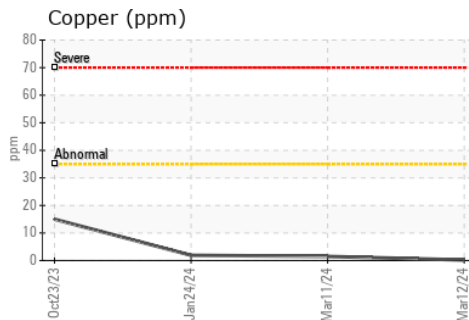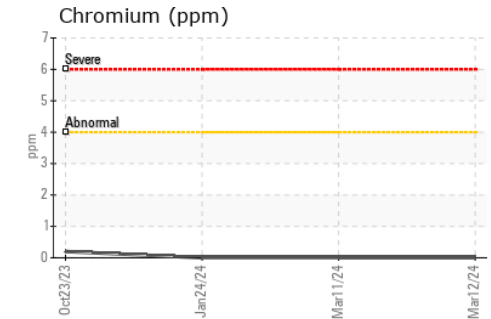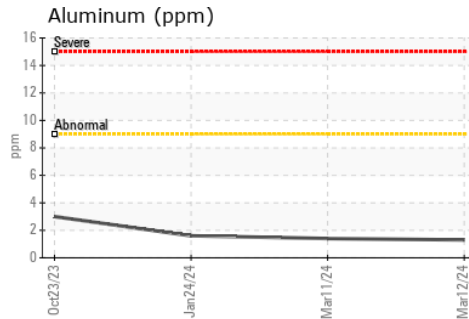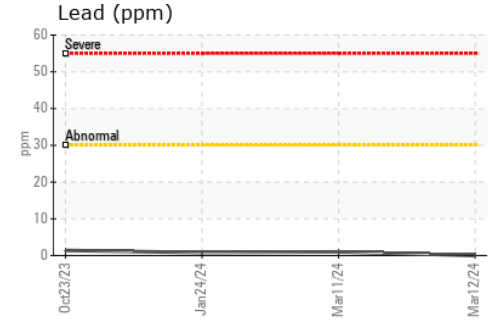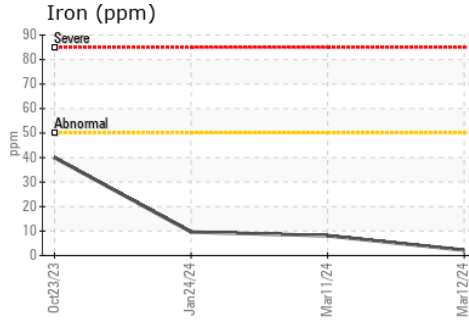

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0917639  
**Lab Number** : 02622664  
**Unique Number** : 5747783  
**Test Package** : MOB 1  
**Received** : 18 Mar 2024  
**Tested** : 18 Mar 2024  
**Diagnosed** : 18 Mar 2024 - Wes Davis

**CITY OF HAMILTON**  
 2200 UPPER JAMES., MOUNTAIN TRANSIT STOREROOM  
 MOUNT HOPE, ON  
 CA L0R 1W0  
 Contact: Ron Skinner  
 ron.skinner@hamilton.ca  
 T:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

F: (905)679-4502