




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

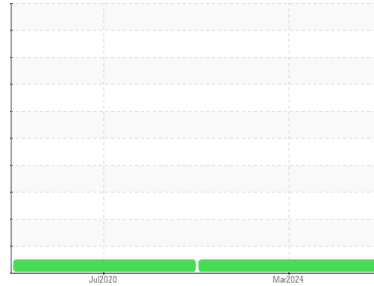

Machine Id  
**ACCUR7604**

Component  
**Hydraulic System**

Fluid  
**PETRO CANADA HYDREX AW 46 (50 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0597210</b>	WC0371746	---
Sample Date	Client Info		<b>17 Mar 2024</b>	28 Jul 2020	---
Machine Age	yrs	Client Info	<b>0</b>	0	---
Oil Age	yrs	Client Info	<b>0</b>	3	---
Oil Changed	Client Info		<b>N/A</b>	N/A	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	---
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	---
Nickel	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	1	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	---
Lead	ppm	ASTM D5185(m)	>20	<b>0</b>	0	---
Copper	ppm	ASTM D5185(m)	>20	<b>9</b>	4	---
Tin	ppm	ASTM D5185(m)	>20	<b>0</b>	0	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	0	<b>0</b>	<1	---
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	<1	---
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185(m)	0	<b>2</b>	1	---
Calcium	ppm	ASTM D5185(m)	50	<b>56</b>	52	---
Phosphorus	ppm	ASTM D5185(m)	330	<b>358</b>	356	---
Zinc	ppm	ASTM D5185(m)	430	<b>429</b>	441	---
Sulfur	ppm	ASTM D5185(m)	760	<b>823</b>	778	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---

## CONTAMINANTS





	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	<b>0</b>	0	---
Sodium	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	---

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>4016</b>	4964	---
Particles >6µm	ASTM D7647	>1300	<b>1102</b>	1256	---
Particles >14µm	ASTM D7647	>160	<b>113</b>	69	---
Particles >21µm	ASTM D7647	>40	<b>35</b>	17	---
Particles >38µm	ASTM D7647	>10	<b>3</b>	0	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>19/17/14</b>	19/17/13	---



# OIL ANALYSIS REPORT

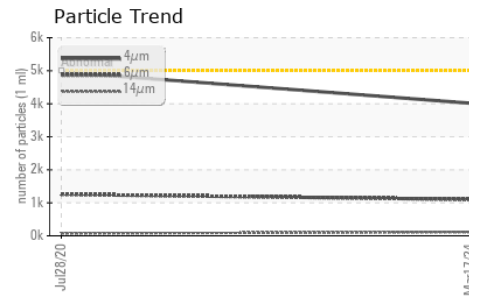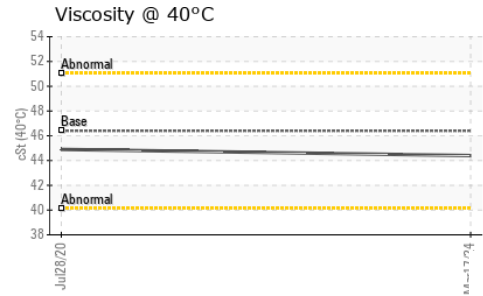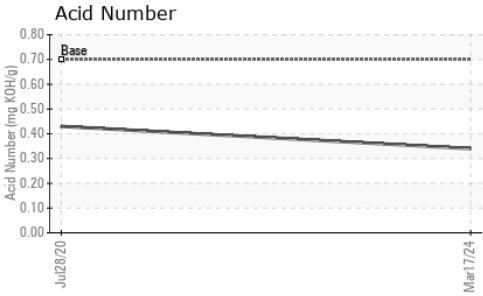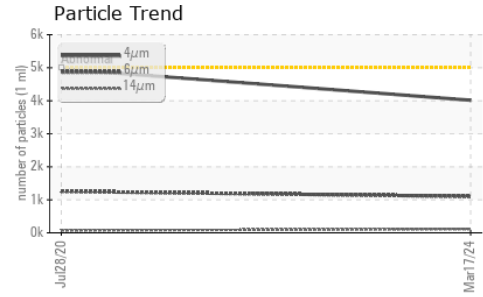

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.70	<b>0.34</b>	0.43	---






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	Visual*	>0.05	<b>NEG</b>	NEG	---
Free Water	scalar	Visual*		<b>NEG</b>	NEG	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46.4	<b>44.4</b>	44.9	---

### SAMPLE IMAGES

method	limit/base	current	history1	history2
Color				no image
Bottom				no image

### GRAPHS

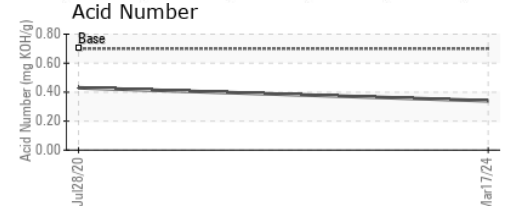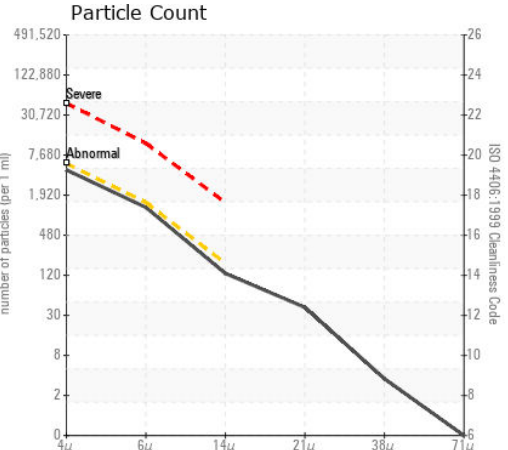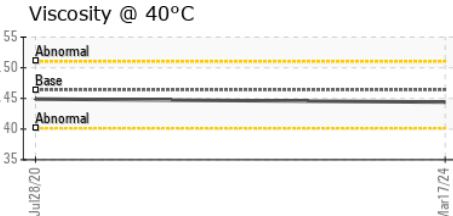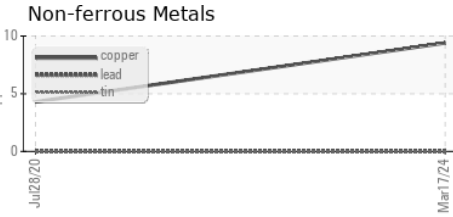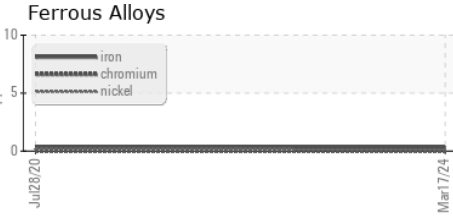

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0597210      **Received** : 18 Mar 2024  
**Lab Number** : **02622684**      **Tested** : 19 Mar 2024  
**Unique Number** : 5747803      **Diagnosed** : 19 Mar 2024 - Kevin Marson  
**Test Package** : IND 2

**LARSEN & SHAW LTD**  
 575 DURHAM ST. WEST  
 WALKERTON, ON  
 CA N0G 2V0  
 Contact: Derek Kuntz  
 dkuntz@larsenhinge.com  
 T: (519)881-1320  
 F: 519883593

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.