

Chem-Ecol

A2403091

OIL ANALYSIS REPORT

Sample Rating Trend

SAMPLE INFORMATION method limit/base







Component Unknown Component Fluid CHAIN OIL MEDIUM (--- LTR)

DIAGNOSIS


Recommendation

We certify this oil to be clean, that the additives are at acceptable levels and the oil is suitable for use.


SAMPLE INFORM	ATION	methoa	limit/base	current	nistory i	nistory∠
Batch #		Client Info		3034-A		
Department		Client Info		Production		
Sample From		Client Info		Machine		
Production Stage		Client Info		Final		
Sent to WC		Client Info		03/14/2024		
Sample Number		Client Info		E30001690		
Sample Date		Client Info		13 Mar 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		7		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		1		
Lead	ppm	ASTM D5185(m)		1		
Copper	ppm	ASTM D5185(m)		6		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		0		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		3		
Calcium	ppm	ASTM D5185(m)		26		
Phosphorus	ppm	ASTM D5185(m)		137		
Zinc	ppm	ASTM D5185(m)		135		
Sulfur	ppm	ASTM D5185(m)		1004		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		<1		
Sodium	ppm	ASTM D5185(m)		2		
Potassium	ppm	ASTM D5185(m)	>20	-		
Water	%	ASTM D6304*		0.001		
ppm Water	ppm	ASTM D6304*		8		



OIL ANALYSIS REPORT

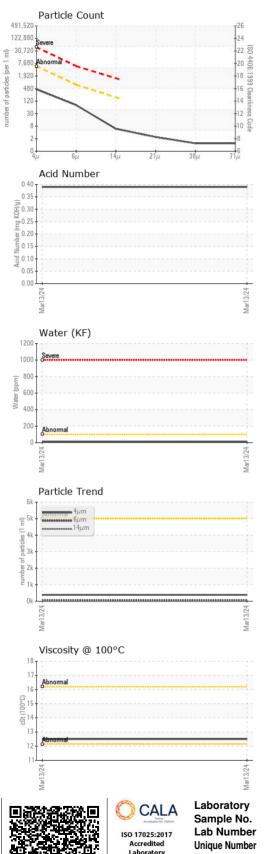

FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	388		
Particles >6µm		ASTM D7647	>640	68		
Particles >14µm		ASTM D7647	>160	5		
Particles >21µm		ASTM D7647	>40	2		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647		1		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	16/13/10		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.39		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar		NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
				NEG		
Free Water	scalar	Visual*				
Free Water FLUID PROPERT		method	limit/base	current	history1	history2
			limit/base			history2
FLUID PROPERT	IES	method	limit/base	current	history1	
FLUID PROPERT Visc @ 40°C	IES cSt	method ASTM D7279(m)	limit/base	current 103	history1	
FLUID PROPERT Visc @ 40°C Visc @ 100°C	IES cSt cSt Scale	method ASTM D7279(m) ASTM D7279(m)	limit/base limit/base	current 103 12.5	history1 	
FLUID PROPERT Visc @ 40°C Visc @ 100°C Viscosity Index (VI)	IES cSt cSt Scale	method ASTM D7279(m) ASTM D7279(m) ASTM D2270*		current 103 12.5 114	history1 	



Contact/Location: Tatiana Sorkina - CHECOB