

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Area Domtar Inc - 888076 PG078-R

Component Unknown Component Fluid CHEM-ECOL PMO 220 (--- GAL)

DIAGNOSIS


Recommendation


We certify this oil to be clean, that the additives are at acceptable levels and the oil is suitable for use.

SAMPLE INFORM	/AT <u>ION</u>	method	limit/base	current	history1	history2
Machine ID		Client Info		851-271 Dirty S		
Department		Client Info		Sales		
Sample From		Client Info		Machine		
Production Stage		Client Info		Lab Reclaim		
Sent to WC		Client Info		03/14/2024		
Sample Number		Client Info		E30001685		
Sample Date		Client Info		14 Mar 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		6		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		<1		
Lead	ppm	ASTM D5185(m)		0		
Copper	ppm	ASTM D5185(m)		4		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium Cadmium	ppm	ASTM D5185(m)		0		
	ppm	ASTM D5185(m)		-		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		0		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		1 22		
Calcium	ppm	ASTM D5185(m) ASTM D5185(m)		22		
Phosphorus Zinc	ppm	ASTM D5185(m)		201		
Sulfur	ppm ppm	ASTM D5185(m)		4969		
Lithium	ppm	ASTM D5185(m)		<1		
		,	line it /b e e e			
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		2		
Sodium	ppm	ASTM D5185(m)	00	2		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Water	%	ASTM D6304*		0.001		
ppm Water	ppm	ASTM D6304*		13		



OIL ANALYSIS REPORT

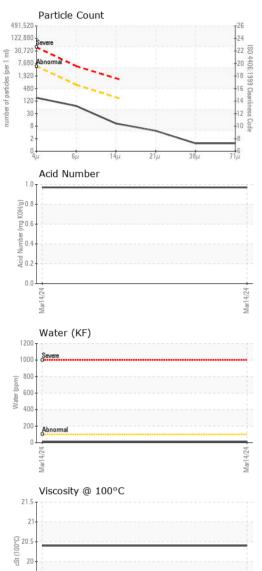

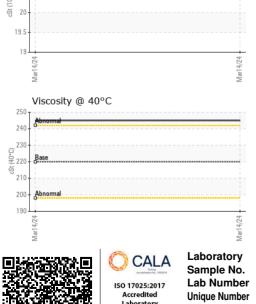

FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	153		
Particles >6µm		ASTM D7647	>640	62		
Particles >14µm		ASTM D7647	>160	9		
Particles >21µm		ASTM D7647	>40	4		
Particles >38µm		ASTM D7647	>10	1		
Particles >71µm		ASTM D7647	>3	1		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	14/13/10		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.97		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	220	245		
Visc @ 100°C	cSt	ASTM D7279(m)		20.4		
Viscosity Index (VI)	Scale	ASTM D2270*		96		
SAMPLE IMAGES	\$	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image

ISO 17025:2017 Accredited Laboratory	Sample No. Lab Number Unique Number Test Package	: E30001685 : 02622699 : 5747818 : IND 2 (Addition	Received Tested Diagnosed	Burlington, ON L7L 5H9 : 18 Mar 2024 : 19 Mar 2024 : 19 Mar 2024 - Tatiana Sorkina PrtCount, TAN Man, VI) 2-2251.	Environmental 360 Solutions Ltd. 640 Victoria Street Cobourg, ON CA K9A 5H5 Contact: Tatiana Sorkina tsorkina@e360s.ca
Test denoted (s sample report, (*) outside scope Ilts and interpre	tsorkina@e360s.ca T: (800)263-3939 F: (905)373-4950			