



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area

## Propulsion

Machine Id

### 12D04A#02 - Palier de butée Tribord

Component

#### Bearing

Fluid

PETRO CANADA TURBOFLO R&O 100 (--- GAL)

#### DIAGNOSIS

##### Recommendation

Resample at the next service interval to monitor.  
NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

##### Wear

All component wear rates are normal.

##### Contamination

There is no indication of any contamination in the oil.

##### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

#### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0866046</b>	---	---
Sample Date	Client Info		<b>05 Mar 2024</b>	---	---
Machine Age	hrs	Client Info	<b>0</b>	---	---
Oil Age	hrs	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>N/A</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

#### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	---	---

#### WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>0</b>	---	---
Iron	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---	---
Chromium	ppm	ASTM D5185(m) >2	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >5	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185(m) >25	<b>4</b>	---	---
Copper	ppm	ASTM D5185(m) >5	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m) >15	<b>4</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

#### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>0</b>	---	---
Barium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Calcium	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 4	<b>2</b>	---	---
Zinc	ppm	ASTM D5185(m) 0	<b>&lt;1</b>	---	---
Sulfur	ppm	ASTM D5185(m)	<b>1849</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

#### CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	<b>0</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---	---

#### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974* 0.09	<b>0.07</b>	---	---



# OIL ANALYSIS REPORT

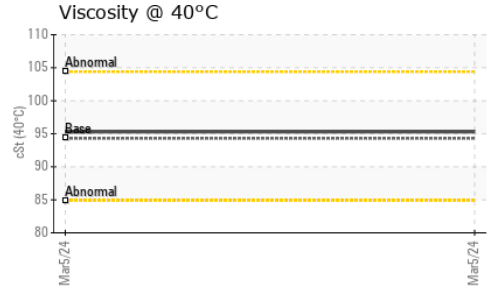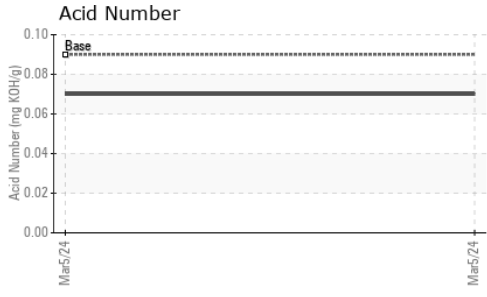






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	94.3	95.3	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

### GRAPHS

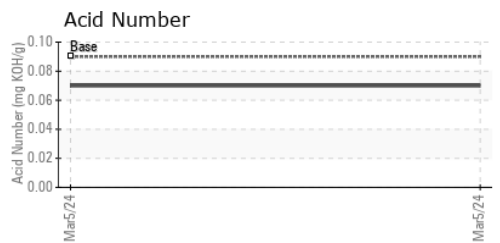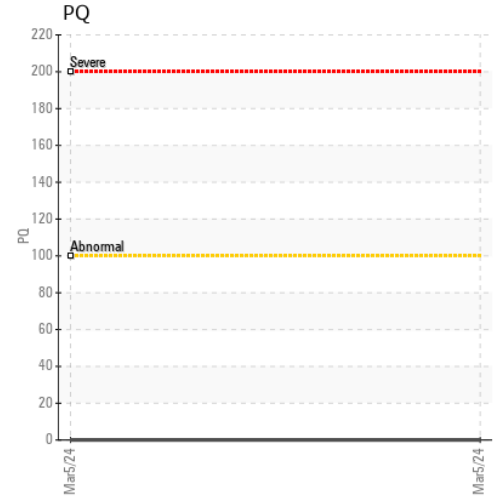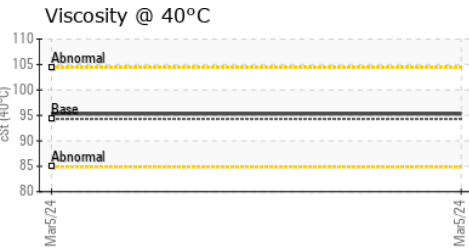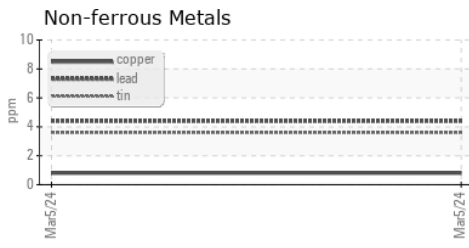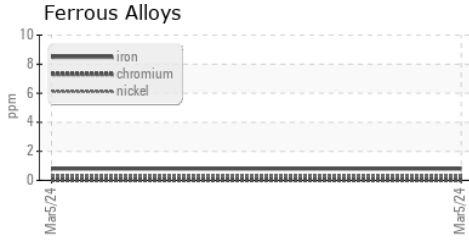

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0866046 **Received** : 18 Mar 2024  
**Lab Number** : 02622715 **Tested** : 19 Mar 2024  
**Unique Number** : 5747834 **Diagnosed** : 19 Mar 2024 - Wes Davis  
**Test Package** : MAR 2 ( Additional Tests: TAN Man )

**Canadian Coast Guard**  
 CCGS Pierre Radisson, 101 Boul. Champlain  
 Quebec, QC  
 CA G1K 7Y7  
 Contact: Pierre Radisson  
 PierreRadissonCE@ccgs-ngcc.gc.ca  
 T: (418)563-1737  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.