



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**MANITOU MT625 FOR420**

Component  
**Front Right Planetary**

Fluid  
**GEAR OIL LS 80W90 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL LS 80W90. Please confirm.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0902340</b>	---	---
Sample Date	Client Info			<b>08 Mar 2024</b>	---	---
Machine Age	hrs	Client Info		<b>12200</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>Not Chngd</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	---	---



WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		<b>231</b>	---	---
Iron	ppm	ASTM D5185(m)	>500	<b>917</b>	---	---
Chromium	ppm	ASTM D5185(m)	>10	<b>9</b>	---	---
Nickel	ppm	ASTM D5185(m)	>10	<b>2</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>2</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>34</b>	---	---
Lead	ppm	ASTM D5185(m)	>25	<b>2</b>	---	---
Copper	ppm	ASTM D5185(m)	>75	<b>80</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	150	<b>210</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>1</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>11</b>	---	---
Magnesium	ppm	ASTM D5185(m)	10	<b>20</b>	---	---
Calcium	ppm	ASTM D5185(m)	70	<b>313</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	2000	<b>1078</b>	---	---
Zinc	ppm	ASTM D5185(m)	50	<b>195</b>	---	---
Sulfur	ppm	ASTM D5185(m)	20000	<b>19073</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>75	<b>124</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>15</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>7</b>	---	---



# OIL ANALYSIS REPORT

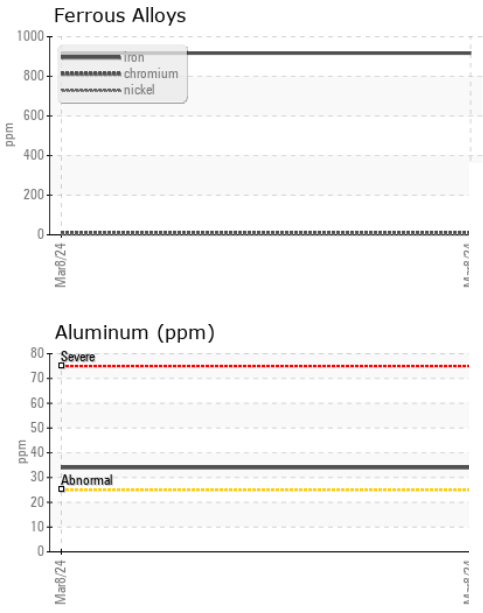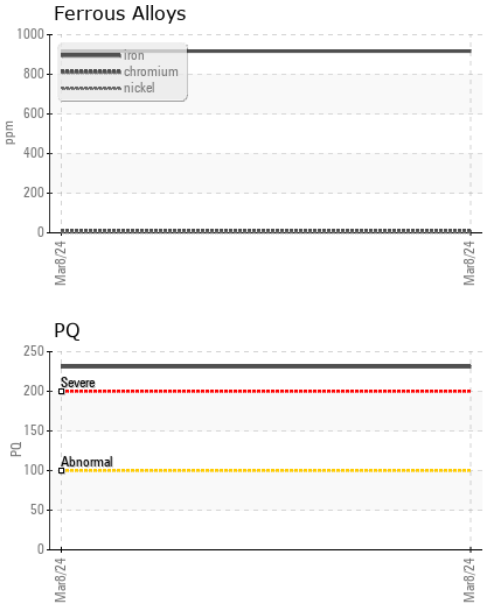


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	140	125	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

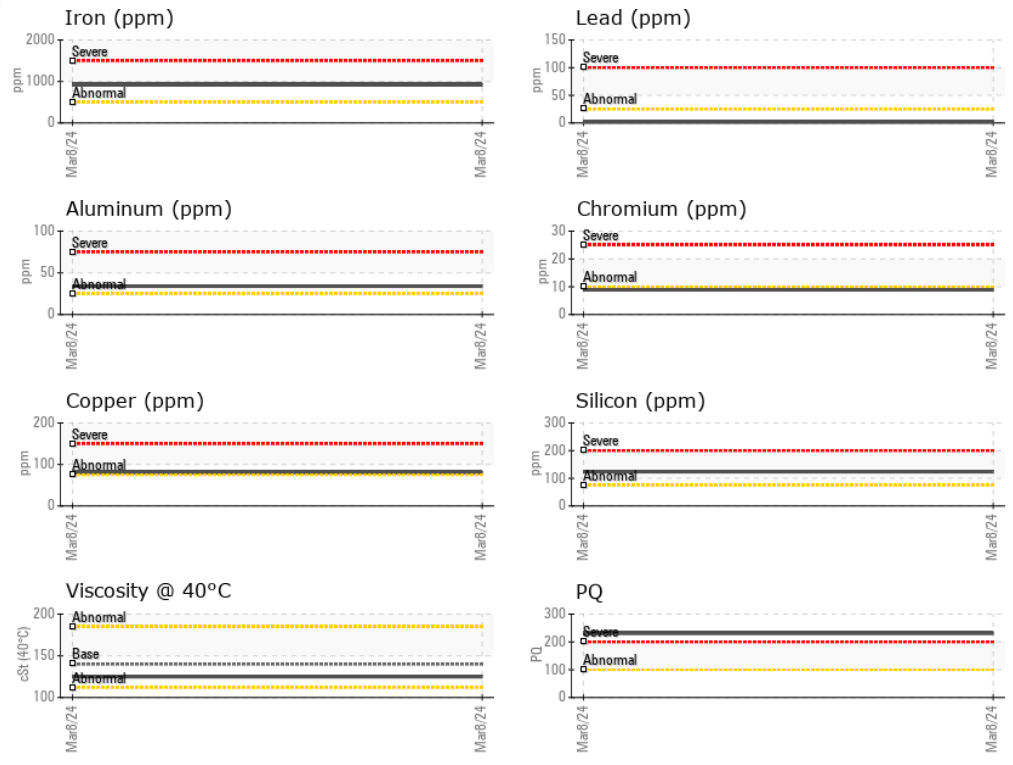

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0902340  
**Lab Number** : 02622780  
**Unique Number** : 5747899  
**Test Package** : MOB 1 ( Additional Tests: PQ )

**Agnico Eagle Canada**  
 1350 Government Rd. W, MACASSA COMPLEX  
 Kirkland Lake, ON  
 CA P2N 3J1  
 Contact: Mitch Lamontagne

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

AEM\_KL\_macassaoilsamplersresults@agnicoeagle.com  
 T: (705)567-5208  
 F: (705)567-5221