




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**CATERPILLAR R1300 SCP216**  
 Component  
**Rear Right Planetary**  
 Fluid  
**PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)**

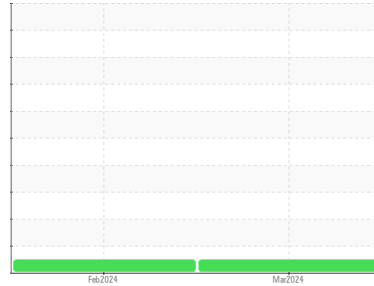

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0902293</b>	WC0650174	---
Sample Date	Client Info		<b>13 Mar 2024</b>	07 Feb 2024	---
Machine Age	hrs	Client Info	<b>3272</b>	2869	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>500	<b>96</b>	63	---
Chromium	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>3</b>	3	---
Lead	ppm	ASTM D5185(m)	>25	<b>0</b>	<1	---
Copper	ppm	ASTM D5185(m)	>75	<b>2</b>	1	---
Tin	ppm	ASTM D5185(m)	>10	<b>2</b>	1	---
Antimony	ppm	ASTM D5185(m)	>5	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	---

## ADDITIVES


	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2	<b>&lt;1</b>	<1	---
Barium	ppm	ASTM D5185(m)	0	<b>2</b>	1	---
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	0	---
Manganese	ppm	ASTM D5185(m)	0	<b>1</b>	<1	---
Magnesium	ppm	ASTM D5185(m)	9	<b>14</b>	12	---
Calcium	ppm	ASTM D5185(m)	3114	<b>3683</b>	3525	---
Phosphorus	ppm	ASTM D5185(m)	1099	<b>950</b>	929	---
Zinc	ppm	ASTM D5185(m)	1245	<b>1071</b>	1076	---
Sulfur	ppm	ASTM D5185(m)	7086	<b>10844</b>	10548	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>75	<b>21</b>	17	---
Sodium	ppm	ASTM D5185(m)		<b>2</b>	1	---
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	<1	---



# OIL ANALYSIS REPORT

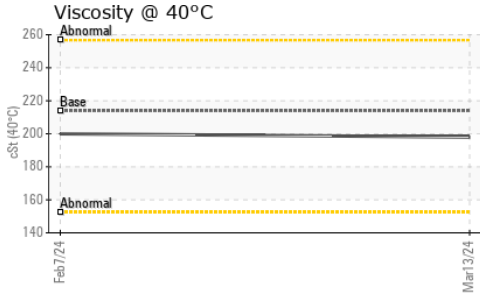









VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	213.9	<b>198</b>	200	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color					no image
Bottom					no image

## GRAPHS

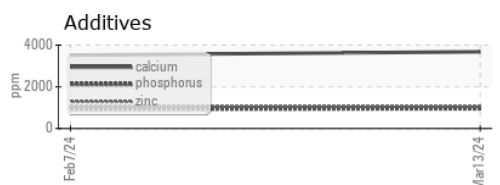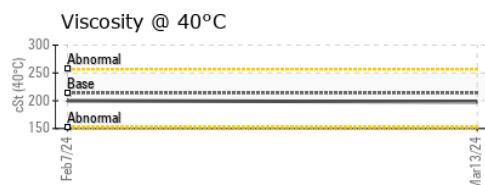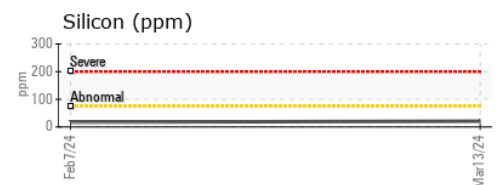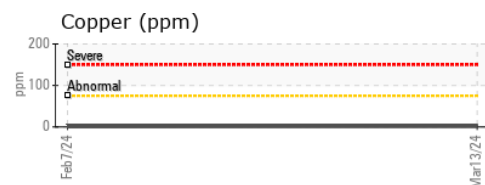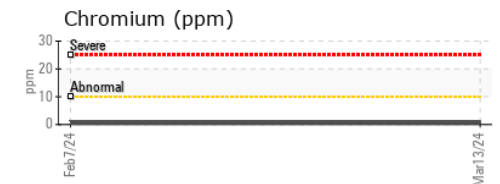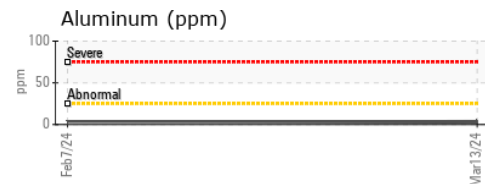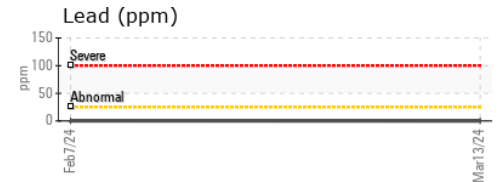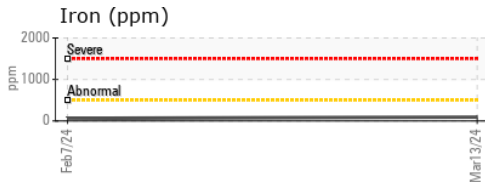

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0902293  
**Lab Number** : 02622790  
**Unique Number** : 5747909  
**Test Package** : MOB 1

**Received** : 18 Mar 2024  
**Tested** : 18 Mar 2024  
**Diagnosed** : 18 Mar 2024 - Wes Davis

**Agnico Eagle Canada**  
 1350 Government Rd. W, MACASSA COMPLEX  
 Kirkland Lake, ON  
 CA P2N 3J1

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

Contact: Mitch Lamontagne  
 AEM\_KL\_macassaoilsampleresults@agnicoeagle.com  
 T: (705)567-5208  
 F: (705)567-5221