



OIL ANALYSIS REPORT

Sample Rating Trend



VISCOSITY



Machine Id
MANITOU MT625 FOR420
 Component
Front Differential
 Fluid
PETRO CANADA DURATRAN (--- GAL)

DIAGNOSIS

▲ Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

▲ Fluid Condition

Viscosity of sample indicates oil is within SAE 10W range, advise investigate. This plus the additive levels indicates that this is not the same brand, or type of oil as reported. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | WC0902337 | --- | --- |
| Sample Date | Client Info | | 08 Mar 2024 | --- | --- |
| Machine Age | hrs | Client Info | 12200 | --- | --- |
| Oil Age | hrs | Client Info | 0 | --- | --- |
| Oil Changed | Client Info | | Not Chngd | --- | --- |
| Sample Status | | | ABNORMAL | --- | --- |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >.2 | NEG | --- | --- |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|---------------|---------|--------------|----------|
| Iron | ppm | ASTM D5185(m) | >500 | 257 | --- |
| Chromium | ppm | ASTM D5185(m) | >10 | 2 | --- |
| Nickel | ppm | ASTM D5185(m) | >10 | 1 | --- |
| Titanium | ppm | ASTM D5185(m) | | 0 | --- |
| Silver | ppm | ASTM D5185(m) | | 0 | --- |
| Aluminum | ppm | ASTM D5185(m) | >25 | 3 | --- |
| Lead | ppm | ASTM D5185(m) | >25 | <1 | --- |
| Copper | ppm | ASTM D5185(m) | >100 | 7 | --- |
| Tin | ppm | ASTM D5185(m) | >10 | 0 | --- |
| Antimony | ppm | ASTM D5185(m) | >5 | 0 | --- |
| Vanadium | ppm | ASTM D5185(m) | | 0 | --- |
| Beryllium | ppm | ASTM D5185(m) | | 0 | --- |
| Cadmium | ppm | ASTM D5185(m) | | 0 | --- |

ADDITIVES



| | method | limit/base | current | history1 | history2 |
|------------|--------|---------------|---------|--------------|----------|
| Boron | ppm | ASTM D5185(m) | 110 | 29 | --- |
| Barium | ppm | ASTM D5185(m) | 0.0 | 0 | --- |
| Molybdenum | ppm | ASTM D5185(m) | 0.0 | 0 | --- |
| Manganese | ppm | ASTM D5185(m) | 1 | 2 | --- |
| Magnesium | ppm | ASTM D5185(m) | 13 | 4 | --- |
| Calcium | ppm | ASTM D5185(m) | 3610 | 424 | --- |
| Phosphorus | ppm | ASTM D5185(m) | 1192 | 491 | --- |
| Zinc | ppm | ASTM D5185(m) | 1455 | 547 | --- |
| Sulfur | ppm | ASTM D5185(m) | 2641 | 3679 | --- |
| Lithium | ppm | ASTM D5185(m) | | <1 | --- |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|---------------|---------|--------------|----------|
| Silicon | ppm | ASTM D5185(m) | >75 | 10 | --- |
| Sodium | ppm | ASTM D5185(m) | | <1 | --- |
| Potassium | ppm | ASTM D5185(m) | >20 | 1 | --- |



OIL ANALYSIS REPORT

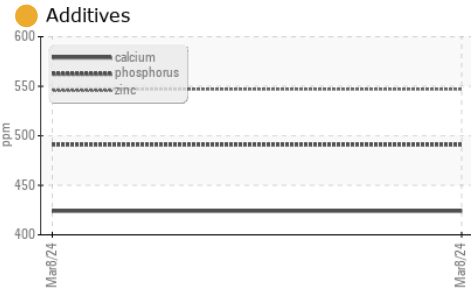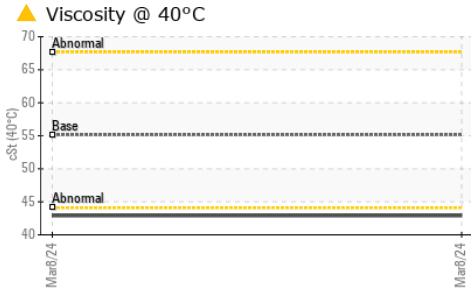









| VISUAL | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|----------|----------|-----|
| White Metal | scalar | Visual* | NONE | NONE | --- | --- |
| Yellow Metal | scalar | Visual* | NONE | NONE | --- | --- |
| Precipitate | scalar | Visual* | NONE | NONE | --- | --- |
| Silt | scalar | Visual* | NONE | NONE | --- | --- |
| Debris | scalar | Visual* | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | Visual* | NONE | NONE | --- | --- |
| Appearance | scalar | Visual* | NORML | NORML | --- | --- |
| Odor | scalar | Visual* | NORML | NORML | --- | --- |
| Emulsified Water | scalar | Visual* | >.2 | NEG | --- | --- |
| Free Water | scalar | Visual* | | NEG | --- | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|---------------|--------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D7279(m) | 55.14 ▲ 42.9 | --- | --- |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

| | | | | | |
|--------|--|--|--|----------|----------|
| Color | | | | no image | no image |
| Bottom | | | | no image | no image |

GRAPHS

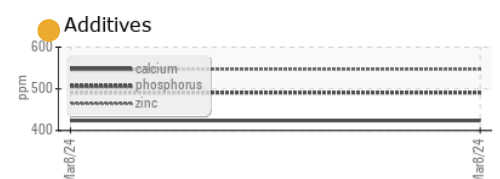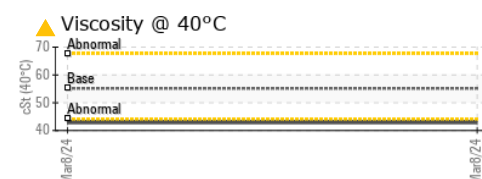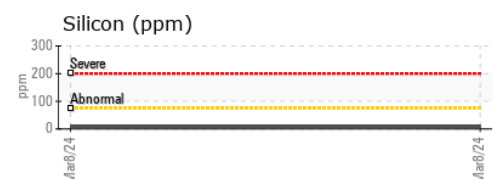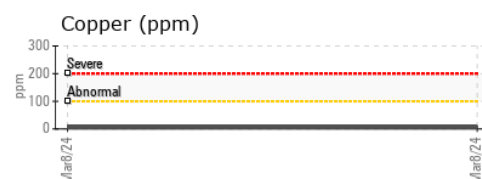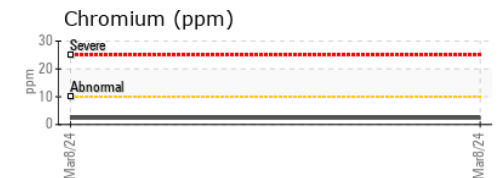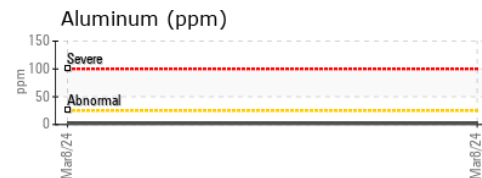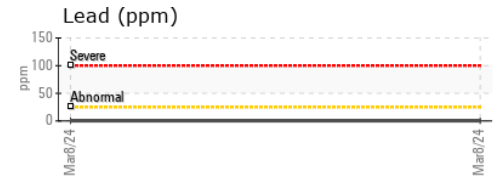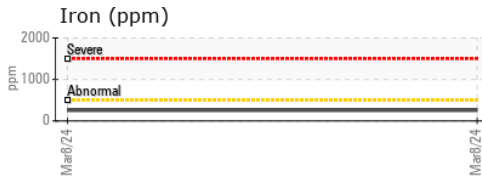

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0902337
Lab Number : 02622793
Unique Number : 5747912
Test Package : MOB 1

Received : 18 Mar 2024
Tested : 18 Mar 2024
Diagnosed : 19 Mar 2024 - Kevin Marson

Agnico Eagle Canada
 1350 Government Rd. W, MACASSA COMPLEX
 Kirkland Lake, ON
 CA P2N 3J1

Contact: Mitch Lamontagne
 AEM_KL_macassaoilsamplesresults@agnicoeagle.com

T: (705)567-5208
 F: (705)567-5221

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.