




FUEL REPORT

Sample Rating Trend

NORMAL



Area
GESTION [152826]
 Machine Id
L130613700 HOMER BRIDGE - 4
 Component
Diesel Fuel
 Fluid
No.2 DIESEL FUEL (LOW-SULPHUR) (--- GAL)

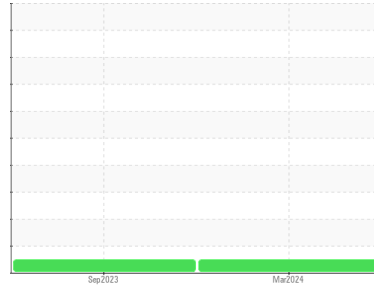

DIAGNOSIS

Recommendation

Laboratory test indicate that this fuel is suitable for use and meets all test requirements. Resample at the next service interval to monitor.

Contaminants

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. There is no indication of any contamination in the diesel fuel.

Fuel Condition

All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel (US EPA/CGSB-3.517-3 type B).

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			CU0022871	CU0021473	---
Sample Date	Client Info			17 Mar 2024	12 Sep 2023	---
Machine Age	hrs	Client Info		0	0	---
Sample Status				NORMAL	NORMAL	---

PHYSICAL PROPERTIES		method	limit/base	current	history1	history2
Specific Gravity		ASTM D1298*	0.839	0.845	0.845	---
Fuel Color	text	Visual Screen*	Yllow	Pink	Pink	---
Visc @ 40°C	cSt	ASTM D7279(m)	3.0	2.8	2.6	---
Pensky-Martens Flash Point	°C	ASTM D7215*	52	62.1	61.2	---

SULFUR CONTENT		method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185(m)	250	5	9	---

DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D2887*	165	173	173	---
5% Distillation Point	°C	ASTM D2887*		200	200	---
10% Distill Point	°C	ASTM D2887*	201	210	210	---
15% Distillation Point	°C	ASTM D2887*		218	218	---
20% Distill Point	°C	ASTM D2887*	216	226	226	---
30% Distill Point	°C	ASTM D2887*	230	241	239	---
40% Distill Point	°C	ASTM D2887*	243	253	251	---
50% Distill Point	°C	ASTM D2887*	255	266	262	---
60% Distill Point	°C	ASTM D2887*	267	278	274	---
70% Distill Point	°C	ASTM D2887*	280	290	286	---
80% Distill Point	°C	ASTM D2887*	295	302	298	---
85% Distillation Point	°C	ASTM D2887*		311	307	---
90% Distill Point	°C	ASTM D2887*	310	320	317	---
95% Distillation Point	°C	ASTM D2887*		337	334	---
Final Boiling Point	°C	ASTM D2887*	341	356	351	---






IGNITION QUALITY		method	limit/base	current	history1	history2
API Gravity		ASTM D1298*	37.7	35	35	---
Cetane Index		ASTM D4737*	<40.0	48	47	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	<1.0	0	<1	---
Sodium	ppm	ASTM D5185(m)	<0.1	0	0	---
Potassium	ppm	ASTM D5185(m)	<0.1	0	<1	---
Water	%	ASTM D6304*	<0.05	0.001	0.003	---
ppm Water	ppm	ASTM D6304*	<500	13	28.5	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	1062	1039	---
Particles >6µm		ASTM D7647	>640	288	349	---
Particles >14µm		ASTM D7647	>80	26	37	---
Particles >21µm		ASTM D7647	>20	5	12	---
Particles >38µm		ASTM D7647	>4	1	1	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>18/16/13	17/15/12	17/16/12	---




FUEL REPORT

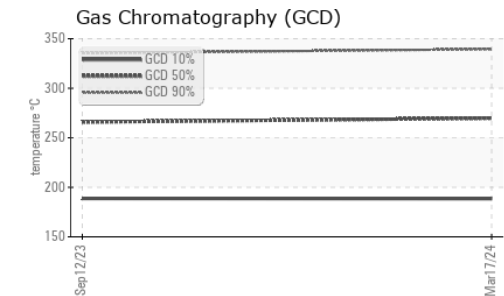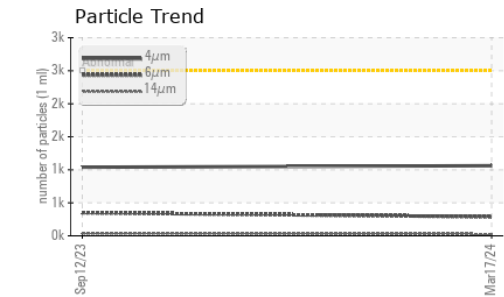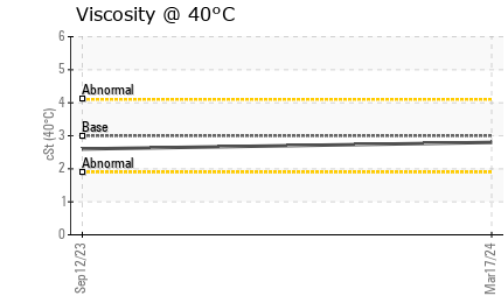
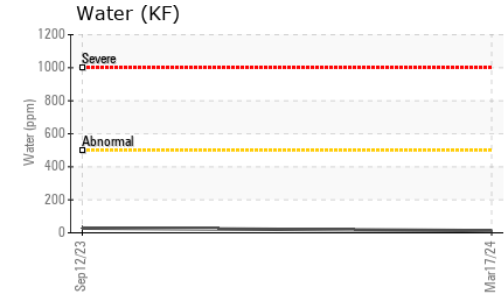
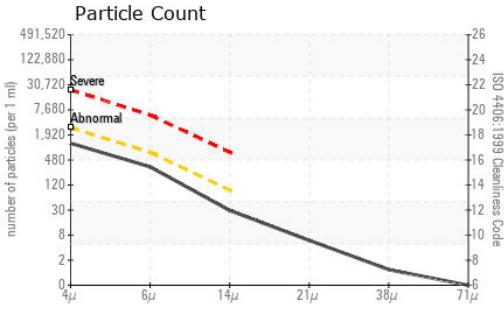


HEAVY METALS	method	limit/base	current	history1	history2	
Aluminum	ppm	ASTM D5185(m)	<0.1	0	---	
Nickel	ppm	ASTM D5185(m)	<0.1	0	---	
Lead	ppm	ASTM D5185(m)	<0.1	<1	---	
Vanadium	ppm	ASTM D5185(m)	<0.1	0	---	
Iron	ppm	ASTM D5185(m)	<0.1	<1	---	
Calcium	ppm	ASTM D5185(m)	<0.1	<1	---	
Magnesium	ppm	ASTM D5185(m)	<0.1	0	---	
Phosphorus	ppm	ASTM D5185(m)	<0.1	<1	---	
Zinc	ppm	ASTM D5185(m)	<0.1	0	<1	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

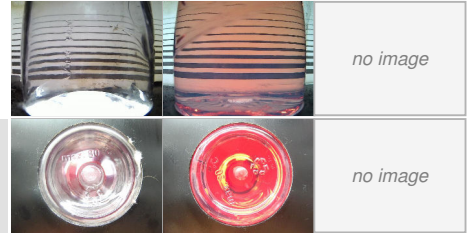

GRAPHS

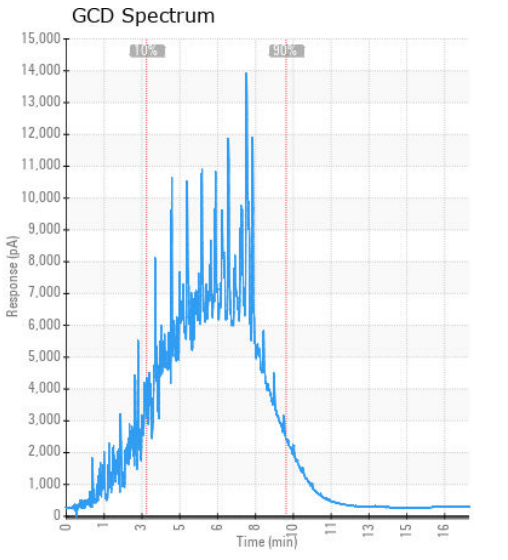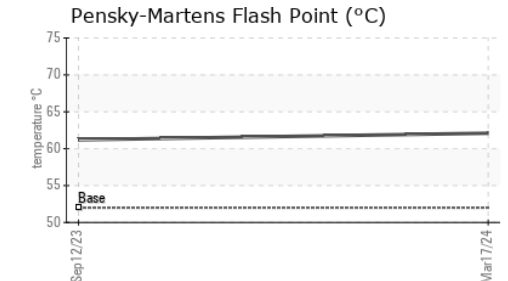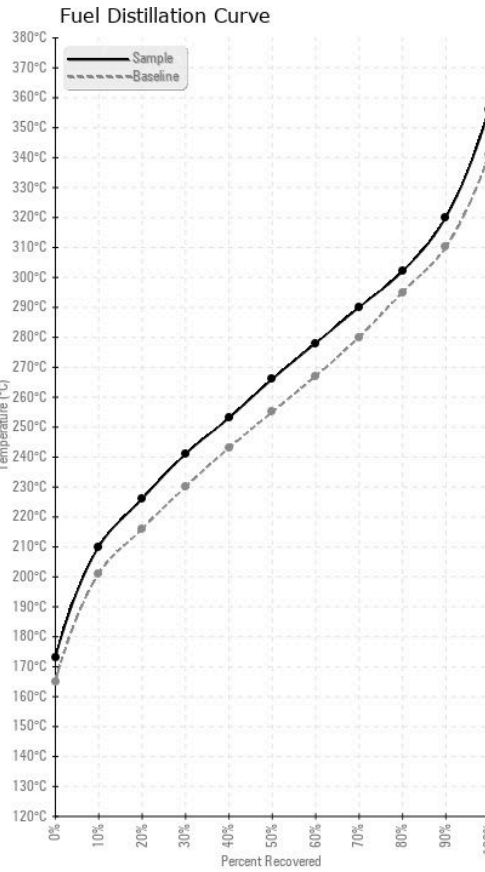

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : CU0022871 **Received** : 18 Mar 2024
Lab Number : 02622883 **Tested** : 20 Mar 2024
Unique Number : 5748002 **Diagnosed** : 20 Mar 2024 - Kevin Marson
Test Package : FUEL (Additional Tests: CC Flash, GC-PercFuel, PrtCount)
 To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

CUMMINS CANADA ULC - GENERATOR DIVISION
 7175 PACIFIC CIRCLE
 MISSISSAUGA, ON
 CA L5T 2A5
 Contact: Zaneef Abboobakar
 zaneef.abboobakar@cummins.com
 T:
 F: (905)795-0035