




OIL ANALYSIS REPORT

Sample Rating Trend

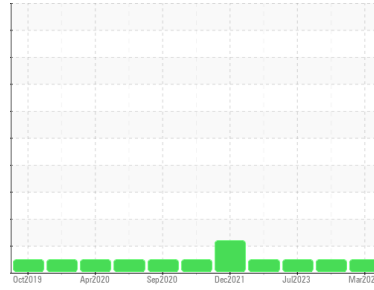

NORMAL



Machine Id

9475

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0853474	WC0853364	WC0796416
Sample Date	Client Info			15 Mar 2024	22 Oct 2023	23 Jul 2023
Machine Age	kms	Client Info		444685	413616	380774
Oil Age	kms	Client Info		0	0	0
Oil Changed	Client Info			Not Changed	Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>90	18	35	23
Chromium	ppm	ASTM D5185(m)	>20	<1	2	1
Nickel	ppm	ASTM D5185(m)	>2	<1	0	0
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	2	4	4
Lead	ppm	ASTM D5185(m)	>40	2	8	6
Copper	ppm	ASTM D5185(m)	>330	2	3	2
Tin	ppm	ASTM D5185(m)	>15	<1	1	1
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	53	27	31
Barium	ppm	ASTM D5185(m)	10	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	100	2	10	9
Manganese	ppm	ASTM D5185(m)		0	<1	<1
Magnesium	ppm	ASTM D5185(m)	450	665	681	694
Calcium	ppm	ASTM D5185(m)	3000	1442	1432	1405
Phosphorus	ppm	ASTM D5185(m)	1150	733	707	759
Zinc	ppm	ASTM D5185(m)	1350	810	825	818
Sulfur	ppm	ASTM D5185(m)	4250	2668	2459	2507
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	4	6	5
Sodium	ppm	ASTM D5185(m)		2	4	3
Potassium	ppm	ASTM D5185(m)	>20	4	4	5

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	0.2	0.4	0.2
Nitration	Abs/cm	ASTM D7624*	>20	11.0	11.4	10.7
Sulfation	Abs./1mm	ASTM D7415*	>30	23.2	27.2	24.9



OIL ANALYSIS REPORT

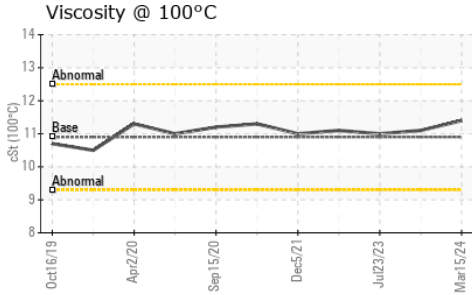

FLUID DEGRADATION		method	limit/base	current	history1	history2
-------------------	--	--------	------------	---------	----------	----------

Oxidation	Abs./1mm	ASTM D7414*	>25	20.7	25.5	21.9
-----------	----------	-------------	-----	-------------	------	------

VISUAL		method	limit/base	current	history1	history2
--------	--	--------	------------	---------	----------	----------









Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
------------------	--------	---------	------	------------	-----	-----

Free Water	scalar	Visual*		NEG	NEG	NEG
------------	--------	---------	--	------------	-----	-----

FLUID PROPERTIES		method	limit/base	current	history1	history2
------------------	--	--------	------------	---------	----------	----------

Visc @ 100°C	cSt	ASTM D7279(m)	10.9	11.4	11.1	11.0
--------------	-----	---------------	------	-------------	------	------

GRAPHS						
--------	--	--	--	--	--	--

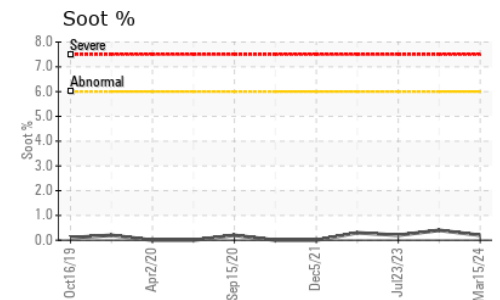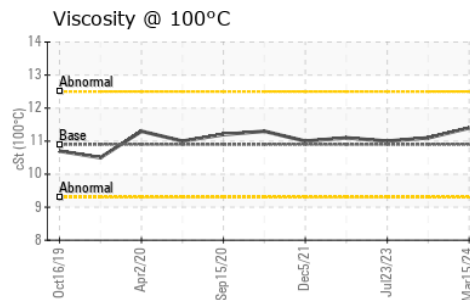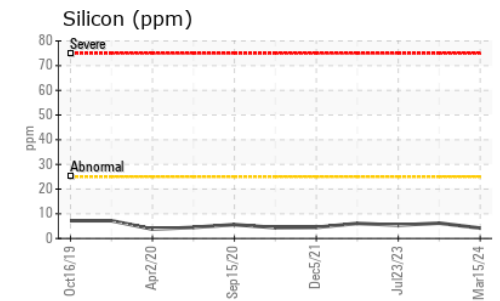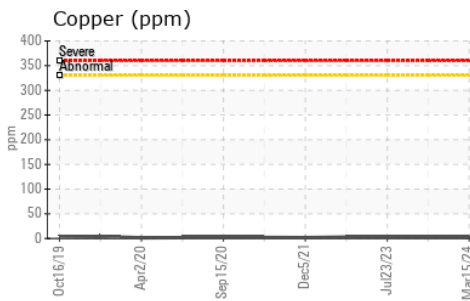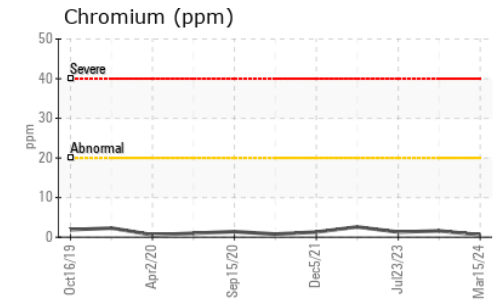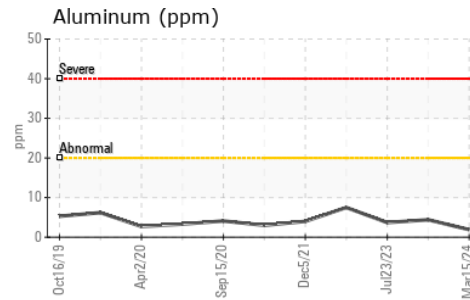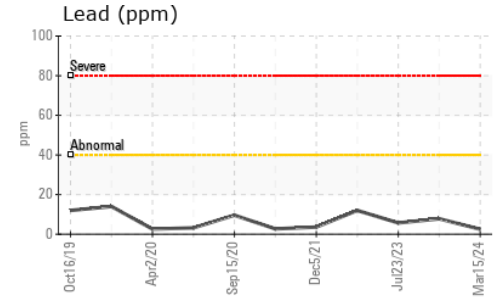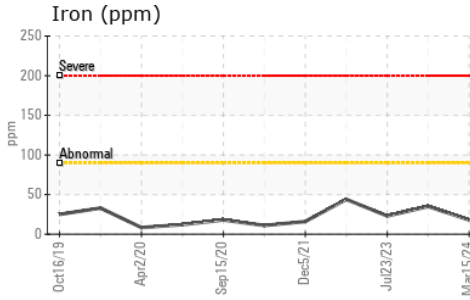

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0853474 **Received** : 19 Mar 2024
Lab Number : **02622946** **Tested** : 19 Mar 2024
Unique Number : 5748065 **Diagnosed** : 19 Mar 2024 - Wes Davis
Test Package : MOB 1

Rush Truck Centres
 7450 Torbram Rd.
 Mississauga, ON
 CA L4T 1G9
 Contact: Serdar Okur
 sokur@rushtruckcentres.ca
 T: (905)671-7600
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.