



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**[66820]**  
 Machine Id  
**VOLVO VNL 4703**  
 Component  
**Diesel Engine**  
 Fluid  
**{not provided} (--- GAL)**



## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

Fuel content negligible. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

Viscosity of sample indicates oil is within SAE 5W30 range, advise investigate. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0909052</b>	---	---
Sample Date	Client Info		<b>16 Mar 2024</b>	---	---
Machine Age	kms	Client Info	<b>102186</b>	---	---
Oil Age	kms	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>69</b>	---
Chromium	ppm	ASTM D5185(m)	>20	<b>2</b>	---
Nickel	ppm	ASTM D5185(m)	>2	<b>5</b>	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---
Silver	ppm	ASTM D5185(m)	>2	<b>2</b>	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>31</b>	---
Lead	ppm	ASTM D5185(m)	>40	<b>1</b>	---
Copper	ppm	ASTM D5185(m)	>330	<b>26</b>	---
Tin	ppm	ASTM D5185(m)	>15	<b>5</b>	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>24</b>	---
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---
Molybdenum	ppm	ASTM D5185(m)		<b>117</b>	---
Manganese	ppm	ASTM D5185(m)		<b>4</b>	---
Magnesium	ppm	ASTM D5185(m)		<b>662</b>	---
Calcium	ppm	ASTM D5185(m)		<b>1558</b>	---
Phosphorus	ppm	ASTM D5185(m)		<b>695</b>	---
Zinc	ppm	ASTM D5185(m)		<b>835</b>	---
Sulfur	ppm	ASTM D5185(m)		<b>1947</b>	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---

## CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>52</b>	---
Sodium	ppm	ASTM D5185(m)		<b>5</b>	---
Potassium	ppm	ASTM D5185(m)	>20	<b>76</b>	---
Fuel	%	ASTM D7593*	>6.0	<b>0.6</b>	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0.4</b>	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>12.6</b>	---
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>26.3</b>	---



# OIL ANALYSIS REPORT






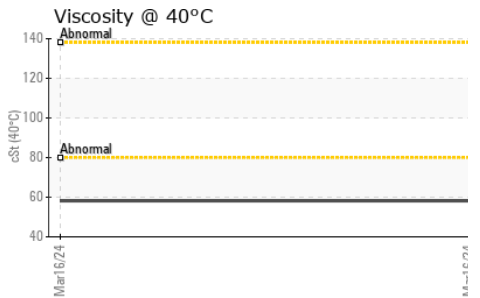
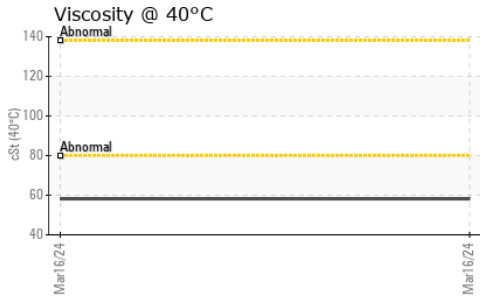
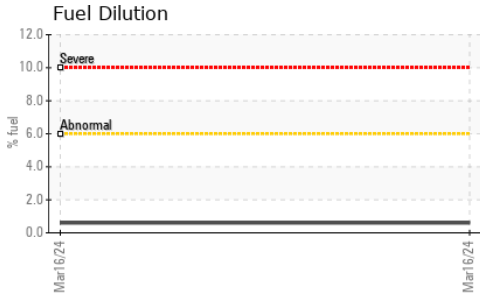


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>27.7</b>	---	---

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	<b>58.2</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	<b>9.5</b>	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	<b>146</b>	---	---

## GRAPHS

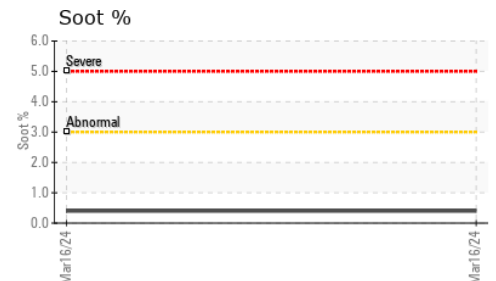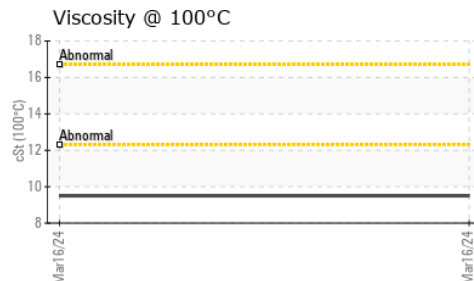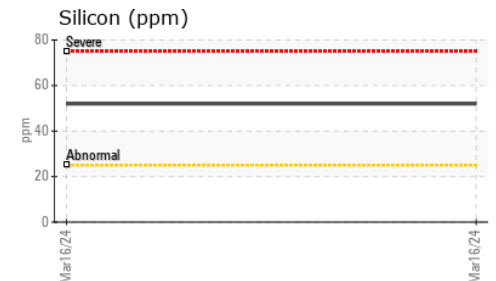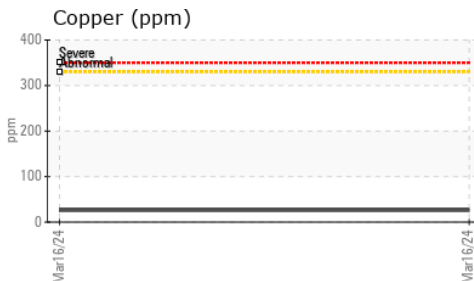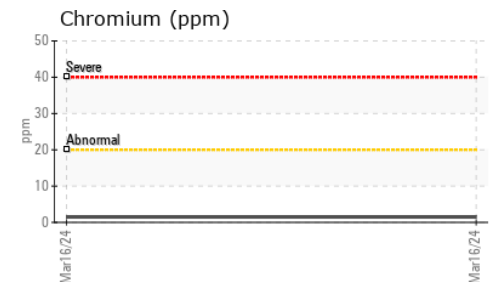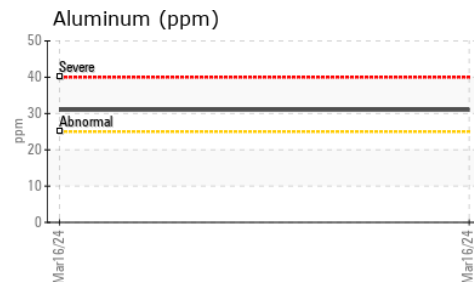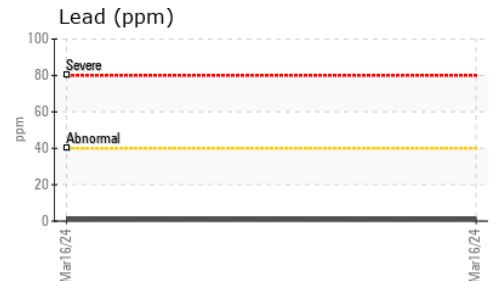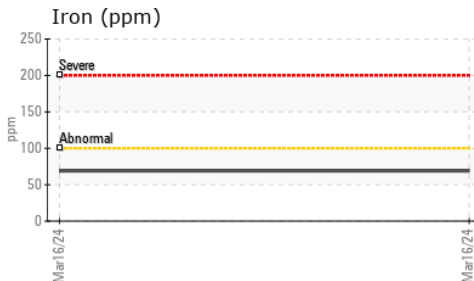

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **PERFORMANCE EQUIPMENT - VISION TRUCK**  
**Sample No.** : WC0909052 **Received** : 19 Mar 2024 **415 EVANS AVENUE**  
**Lab Number** : **02622967** **Tested** : 20 Mar 2024 **ETOBICOKE, ON**  
**Unique Number** : 5748086 **Diagnosed** : 20 Mar 2024 - Kevin Marson **CA M8W 0B3**  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, KV40, PercentFuel, VI ) **Contact: Service**

To discuss this sample report, contact Customer Service at 1-800-268-2131. **etobservice@visiontruckgroup.com**  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. **T:**  
 Validity of results and interpretation are based on the sample and information as supplied. **F:**