

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

Area Linamar Coop - T01200 Machine Id A2403107

Component Quench Oil Fluid {not provided} (--- GAL)

DIAGNOSIS

Recommendation

We certify this oil to be clean and suitable for use.


Fluid Condition


Visc @ 100°C is abnormally low. Visc @ 40°C is abnormally low.


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Batch #		Client Info		2024 02 0670		
Department		Client Info		Production		
Sample From		Client Info		Machine		
Production Stage		Client Info		Final		
Sent to WC		Client Info		03/15/2024		
Sample Number		Client Info		E30001699		
Sample Date		Client Info		15 Mar 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		7		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		<1		
Lead	ppm	ASTM D5185(m)		<1		
Copper	ppm	ASTM D5185(m)		4		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<1		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		4		
Calcium	ppm	ASTM D5185(m)		18		
Phosphorus	ppm	ASTM D5185(m)		41		
Zinc	ppm	ASTM D5185(m)		30		
Sulfur	ppm	ASTM D5185(m)		203		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		1		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Water	%	ASTM D6304*		0.003		
ppm Water	ppm	ASTM D6304*		29		



OIL ANALYSIS REPORT





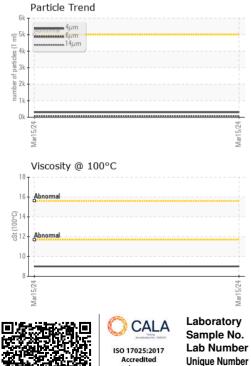

FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	305		
Particles >6µm		ASTM D7647	>640	66		
Particles >14µm		ASTM D7647	>160	4		
Particles >21µm		ASTM D7647	>40	1		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	15/13/9		
FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.13		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)		61.6		
Visc @ 100°C	cSt	ASTM D7279(m)		9.0		
Viscosity Index (VI)	Scale	ASTM D2270*		122		
SAMPLE IMAGES	;	method	limit/base	current	history1	history2
Color					no image	no image
Bottom				The second secon	no image	no image

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Environmental 360 Solutions Ltd. : E30001699 Received : 19 Mar 2024 640 Victoria Street Lab Number : 02623047 Tested : 20 Mar 2024 Cobourg, ON Accredited Laboratory Unique Number : 5748166 Diagnosed : 21 Mar 2024 - Tatiana Sorkina CA K9A 5H5 Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, TAN Man, VI) Contact: Tatiana Sorkina To discuss this sample report, contact Customer Service at 1-905-372-2251. tsorkina@e360s.ca T: (800)263-3939 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied. F: (905)373-4950