




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

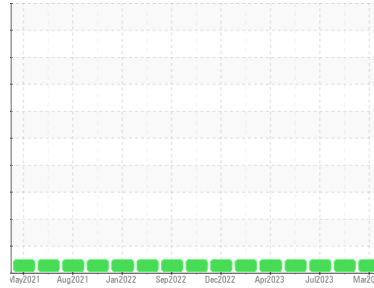

Machine Id  
**INTERNATIONAL 3294**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (26 LTR)**

## DIAGNOSIS

### Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0899679</b>	WC0889995	WC0828305
Sample Date	Client Info			<b>13 Mar 2024</b>	31 Jan 2024	07 Jul 2023
Machine Age	mls	Client Info		<b>443649</b>	307301	360723
Oil Age	mls	Client Info		<b>21602</b>	16806	15963
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	0.0

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>75	<b>29</b>	17	30
Chromium	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>15	<b>4</b>	8	7
Lead	ppm	ASTM D5185(m)	>25	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m)	>100	<b>2</b>	<1	15
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	2	<b>38</b>	2	2
Barium	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	50	<b>&lt;1</b>	59	64
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	0	1
Magnesium	ppm	ASTM D5185(m)	950	<b>758</b>	960	1047
Calcium	ppm	ASTM D5185(m)	1050	<b>1374</b>	1137	1124
Phosphorus	ppm	ASTM D5185(m)	995	<b>698</b>	1033	1135
Zinc	ppm	ASTM D5185(m)	1180	<b>802</b>	1200	1299
Sulfur	ppm	ASTM D5185(m)	2600	<b>2463</b>	2692	2474
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>6</b>	3	6
Sodium	ppm	ASTM D5185(m)		<b>3</b>	5	137
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	5	8

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	<b>0.5</b>	0.3	0.3
Nitration	Abs/cm	ASTM D7624*	>20	<b>10.2</b>	10.7	10.0
Sulfation	Abs.1mm	ASTM D7415*	>30	<b>20.8</b>	21.0	21.4



# OIL ANALYSIS REPORT







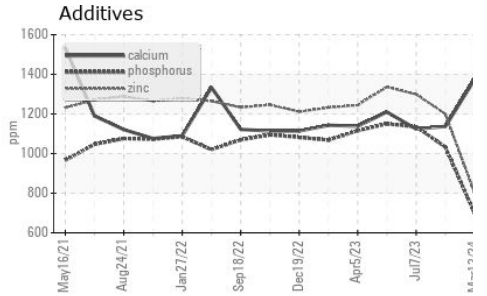
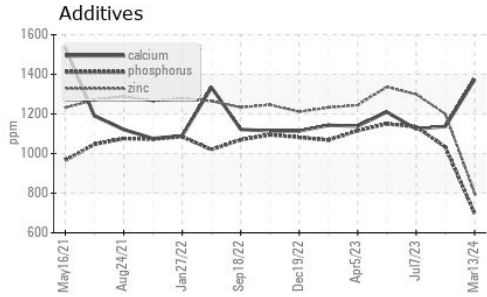


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>16.0</b>	19.1	18.6

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	<b>10.9</b>	11.1	12.6

## GRAPHS

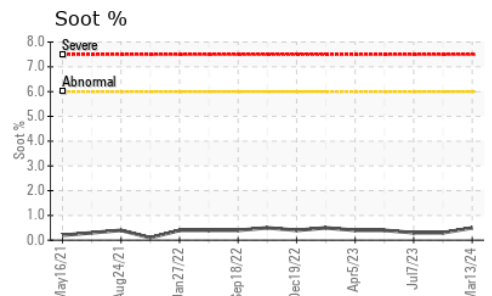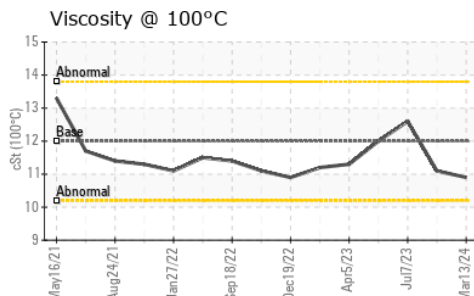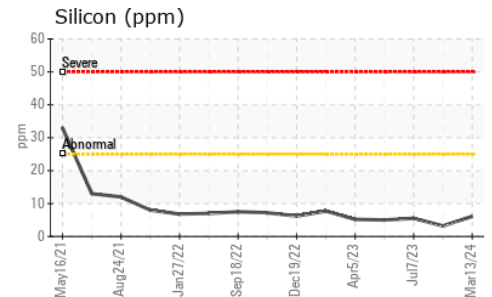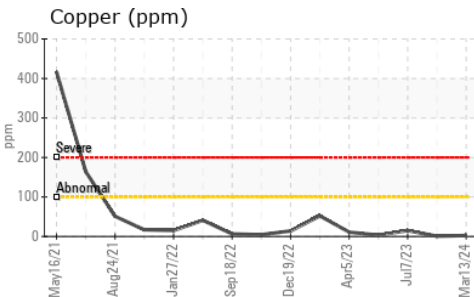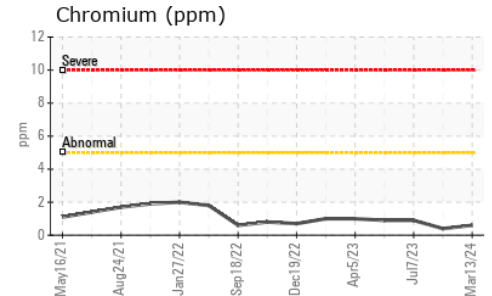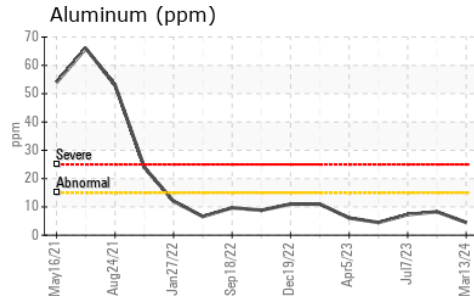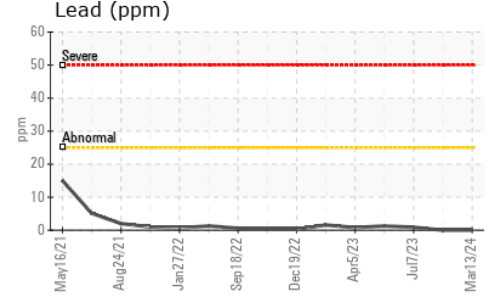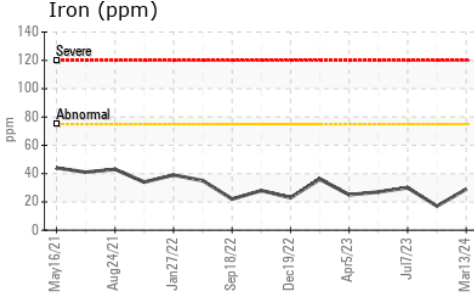

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0899679 **Received** : 20 Mar 2024  
**Lab Number** : **02623278** **Tested** : 20 Mar 2024  
**Unique Number** : 5748397 **Diagnosed** : 20 Mar 2024 - Kevin Marson  
**Test Package** : MOB 1

**MANITOULIN TRANSPORT (GARAGE)**  
 1335 SHAWSON DRIVE  
 MISSISSAUGA, ON  
 CA L4W 1C4  
 Contact: Travis Spence  
 tspence@manitoulintransport.com  
 T:  
 F: (905)564-6361

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.