

OIL ANALYSIS REPORT

Tin

Antimony

Vanadium

Beryllium

Chem-Ecol A2403111

Component
Cutting Fluid

CHEM-ECOL CUTTING OIL 250A (--- GAL)

Sample Rating Trend



D	IA	G	N	O	S	IS	

Recommendation

We certify that this oil is clean, that the additives are at acceptable levels, and that it is suitable for use.

			·	Mar2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Batch #		Client Info		3029-A		
Department		Client Info		Production		
Sample From		Client Info		Machine		
Production Stage		Client Info		Final		
Sent to WC		Client Info		03/18/2024		
Sample Number		Client Info		E30001703		
Sample Date		Client Info		15 Mar 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		9		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		0		
Lead	ppm	ASTM D5185(m)		0		
Copper	ppm	ASTM D5185(m)		8		

Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		0		
Barium	ppm	ASTM D5185(m)		0		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		4		
Calcium	ppm	ASTM D5185(m)		24		
Phosphorus	ppm	ASTM D5185(m)		243		
Zinc	ppm	ASTM D5185(m)		243		
Sulfur	ppm	ASTM D5185(m)		965		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	3	method	limit/base	current	historv1	history2

ASTM D5185(m)

ASTM D5185(m)

ASTM D5185(m)

ASTM D5185(m)

ppm

ppm

ppm

ppm

0

0


0

0

CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		0		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Water	%	ASTM D6304*		0.003		
ppm Water	ppm	ASTM D6304*		33		



OIL ANALYSIS REPORT

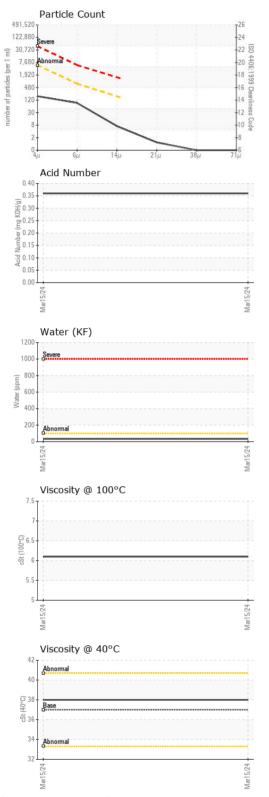

FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	163		
Particles >6µm		ASTM D7647	>640	77		
Particles >14µm		ASTM D7647	>160	6		
Particles >21µm		ASTM D7647	>40	1		
Particles >38µm		ASTM D7647	>10	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	15/13/10		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		0.36		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERTI	IES	method	limit/base	current	history1	history2
рН	Scale 0-14	ASTM D1287*		4.54		
Visc @ 40°C	cSt	ASTM D7279(m)	37	38.0		
Visc @ 100°C	cSt	ASTM D7279(m)		6.1		
Viscosity Index (VI)	Scale	ASTM D2270*		105		
SAMPLE IMAGES	;	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image



CALA ISO 17025:2017 Accredited Laboratory

Report Id: CHECOB [WCAMIS] 02623384 (Generated: 03/22/2024 12:46:42) Rev: 1

Laboratory Sample No.

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9

Lab Number : 02623384 Unique Number : 5748503

: E30001703

Validity of results and interpretation are based on the sample and information as supplied.

Received : 20 Mar 2024 **Tested** : 22 Mar 2024 Diagnosed : 22 Mar 2024 - Tatiana Sorkina

Test Package: IND 2 (Additional Tests: KV100, PrtCount, VI) To discuss this sample report, contact Customer Service at 1-905-372-2251. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. **Environmental 360 Solutions Ltd.**

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939 F: (905)373-4950