




# PROBLEM SUMMARY


Area  
**[804702]**  
 Machine Id  
**TINKER OMEGA PH82503 TRAY STAKER (S/N MIP-1224)**  
 Component  
**Hydraulic System**  
 Fluid  
**CASTROL HYPSPIN DHV 46 (225 LTR)**

Sample Rating Trend

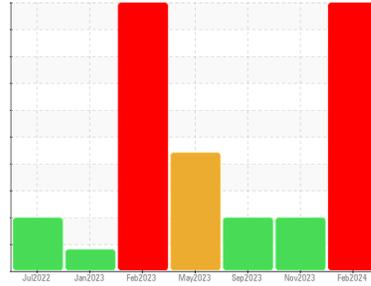

## COMPONENT CONDITION SUMMARY

▲ Particle Trend

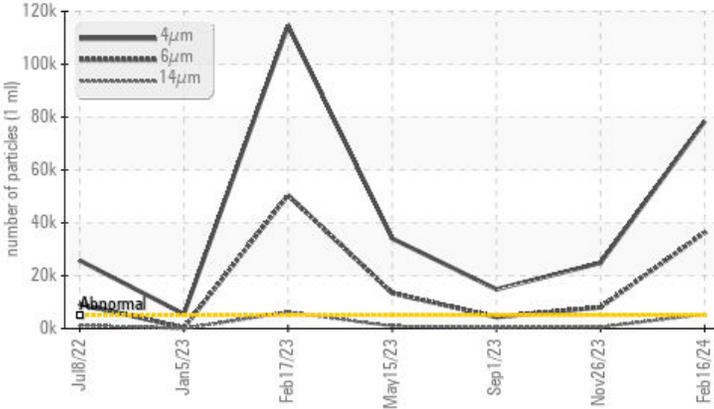

## RECOMMENDATION

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation.

## PROBLEMATIC TEST RESULTS

Sample Status	ASTM D7647	SEVERE	ABNORMAL	ABNORMAL
Particles >4µm	>5000	▲ 78371	▲ 24869	▲ 14844
Particles >6µm	>1300	▲ 36293	▲ 8034	▲ 4340
Particles >14µm	>160	▲ 5399	▲ 571	▲ 341
Particles >21µm	>40	▲ 1718	▲ 117	● 64
Particles >38µm	>10	▲ 154	5	4
Particles >71µm	>3	▲ 7	1	1
Oil Cleanliness	ISO 4406 (c) >19/17/14	▲ 23/22/20	▲ 22/20/16	▲ 21/19/16

Customer Id: ESCPOR  
 Sample No.: WC0885262  
 Lab Number: 02623393  
 Test Package: IND 2



To manage this report scan the QR code

To discuss the diagnosis or test data:  
 Wes Davis +1 905-569-8600 x223  
[wesd@wearcheck.ca](mailto:wesd@wearcheck.ca)

To change component or sample information:  
 Gloria Gonzalez +1 (289)291-4643 x4643  
[gloria.gonzalez@wearcheck.com](mailto:gloria.gonzalez@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Filter	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.
Resample	---	---	?	Resample in 30-45 days to monitor this situation.
Check Breathers	---	---	?	The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather.
Check Dirt Access	---	---	?	We advise that you check all areas where contaminants can enter the system.
Filter Fluid	---	---	?	We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid.

## HISTORICAL DIAGNOSIS

### 26 Nov 2023 Diag: Wes Davis

ISO



We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a moderate amount of particulates (2 to 100 microns in size) present in the oil. The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report



### 01 Sep 2023 Diag: Wes Davis

ISO



We recommend you service the filters on this component. We recommend an early resample to monitor this condition. All component wear rates are normal. There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

view report



### 15 May 2023 Diag: Kevin Marson

ISO



We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation. We suspect that the abnormal contaminant(s) is the result of incorrect sampling technique. **DISCLAIMER:** Interpretation of results is based on the sample as received from the customer. The condition of the sample and the method of sampling cannot be verified. All component wear rates are normal. There is a high amount of particulates (2 to 100 microns in size) present in the oil. Light concentration of visible dirt/debris present in the oil. The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

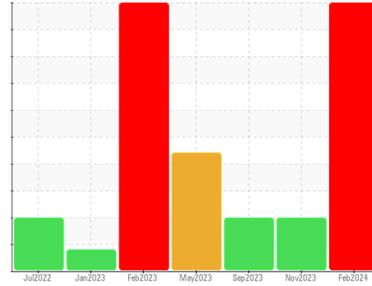

ISO



Area  
**[804702]**  
 Machine Id  
**TINKER OMEGA PH82503 TRAY STAKER (S/N MIP-1224)**  
 Component  
**Hydraulic System**  
 Fluid  
**CASTROL HYSPIN DHV 46 (225 LTR)**

## DIAGNOSIS

### ▲ Recommendation

We advise that you check all areas where contaminants can enter the system. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. The air breather requires service. If unrated, we recommend that you replace with a suitable micron rated and/or desiccant air breather. If rated, we recommend that you service/replace the breather. Resample in 30-45 days to monitor this situation.

### Wear

All component wear rates are normal.

### ▲ Contamination

There is a high amount of particulates (2 to 100 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0885262</b>	WC0741313	WC0741319
Sample Date	Client Info		<b>16 Feb 2024</b>	26 Nov 2023	01 Sep 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>SEVERE</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.05	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	3
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>0</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>20	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	1
Tin	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>5</b>	8	<1
Barium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Molybdenum	ppm	ASTM D5185(m)		<b>2</b>	3	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)		<b>23</b>	22	<1
Calcium	ppm	ASTM D5185(m)		<b>113</b>	112	13
Phosphorus	ppm	ASTM D5185(m)		<b>391</b>	384	512
Zinc	ppm	ASTM D5185(m)		<b>489</b>	484	608
Sulfur	ppm	ASTM D5185(m)		<b>1350</b>	1347	4147
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS





	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>15	<b>2</b>	3	14
Sodium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0

## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>▲ 78371</b>	▲ 24869	▲ 14844
Particles >6µm	ASTM D7647	>1300	<b>▲ 36293</b>	▲ 8034	▲ 4340
Particles >14µm	ASTM D7647	>160	<b>▲ 5399</b>	▲ 571	▲ 341
Particles >21µm	ASTM D7647	>40	<b>▲ 1718</b>	▲ 117	● 64
Particles >38µm	ASTM D7647	>10	<b>▲ 154</b>	5	4
Particles >71µm	ASTM D7647	>3	<b>▲ 7</b>	1	1
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>▲ 23/22/20</b>	▲ 22/20/16	▲ 21/19/16




# OIL ANALYSIS REPORT

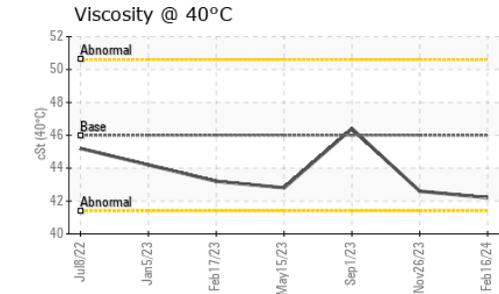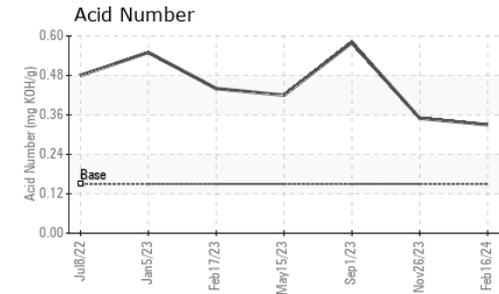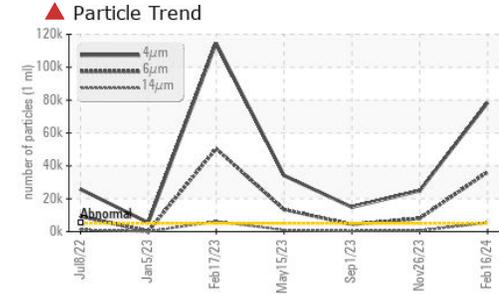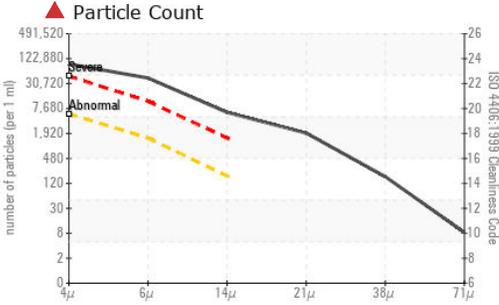

FLUID DEGRADATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.15	<b>0.33</b>	0.35	0.58

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML
Emulsified Water	scalar	Visual*	>0.05	<b>NEG</b>	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	46.0	<b>42.2</b>	42.6	46.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					
PrntFilter			no image	no image	no image



**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0885262  
**Lab Number** : **02623393**  
**Unique Number** : 5748512  
**Test Package** : IND 2  
**Received** : 20 Mar 2024  
**Tested** : 21 Mar 2024  
**Diagnosed** : 21 Mar 2024 - Wes Davis

**ESCO LTD.**  
 P.O. BOX 270, 185 HOPE STREET SOUTH  
 PORT HOPE, ON  
 CA L1A 3W4  
 Contact: Paul Dundas  
 paul.dundas@mail.weir  
 T: (647)725-8153  
 F: (905)885-7600

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.