




OIL ANALYSIS REPORT

Sample Rating Trend

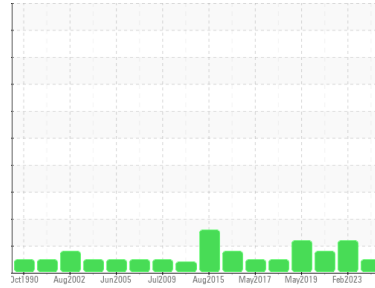

NORMAL



Area
1220 Birchmount
 Machine Id
A6 NISSAI
 Component
Hydraulic System
 Fluid
SUNOCO SUNVIS 846 ISO 46 (1200 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | WC0921778 | WC0788496 | WC0576454 |
| Sample Date | Client Info | 19 Mar 2024 | 14 Feb 2023 | 12 Apr 2021 |
| Machine Age | hrs | Client Info | 0 | 0 |
| Oil Age | hrs | Client Info | 0 | 0 |
| Oil Changed | Client Info | N/A | N/A | N/A |
| Sample Status | | NORMAL | ABNORMAL | ABNORMAL |

CONTAMINATION

| method | limit/base | current | history1 | history2 |
|--------|-----------------|------------|----------|----------|
| Water | WC Method >0.05 | NEG | NEG | NEG |

WEAR METALS

| method | limit/base | current | history1 | history2 | |
|-----------|------------|-------------------|-----------|----------|----|
| Iron | ppm | ASTM D5185(m) >20 | 1 | 3 | 2 |
| Chromium | ppm | ASTM D5185(m) >20 | 0 | 0 | <1 |
| Nickel | ppm | ASTM D5185(m) >20 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185(m) | 0 | 0 | <1 |
| Aluminum | ppm | ASTM D5185(m) >20 | 0 | <1 | <1 |
| Lead | ppm | ASTM D5185(m) >20 | 2 | 3 | 3 |
| Copper | ppm | ASTM D5185(m) >20 | 20 | 21 | 20 |
| Tin | ppm | ASTM D5185(m) >20 | 0 | <1 | <1 |
| Antimony | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Beryllium | ppm | ASTM D5185(m) | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185(m) | 0 | 0 | 0 |

ADDITIVES

| method | limit/base | current | history1 | history2 | |
|------------|------------|---------------|--------------|----------|------|
| Boron | ppm | ASTM D5185(m) | 0 | <1 | <1 |
| Barium | ppm | ASTM D5185(m) | 7 | 8 | 9 |
| Molybdenum | ppm | ASTM D5185(m) | 0 | 0 | <1 |
| Manganese | ppm | ASTM D5185(m) | 0 | <1 | <1 |
| Magnesium | ppm | ASTM D5185(m) | <1 | <1 | <1 |
| Calcium | ppm | ASTM D5185(m) | 41 | 45 | 42 |
| Phosphorus | ppm | ASTM D5185(m) | 303 | 345 | 292 |
| Zinc | ppm | ASTM D5185(m) | 335 | 345 | 349 |
| Sulfur | ppm | ASTM D5185(m) | 1117 | 1208 | 1178 |
| Lithium | ppm | ASTM D5185(m) | <1 | <1 | <1 |

CONTAMINANTS





| method | limit/base | current | history1 | history2 | |
|-----------|------------|-------------------|--------------|----------|----|
| Silicon | ppm | ASTM D5185(m) >15 | 0 | <1 | <1 |
| Sodium | ppm | ASTM D5185(m) | 0 | 0 | <1 |
| Potassium | ppm | ASTM D5185(m) >20 | <1 | 0 | 0 |

FLUID CLEANLINESS

| method | limit/base | current | history1 | history2 |
|-----------------|------------------------|-----------------|------------|------------|
| Particles >4µm | ASTM D7647 >5000 | 3300 | ▲ 15068 | ▲ 12206 |
| Particles >6µm | ASTM D7647 >1300 | 767 | ● 2272 | ● 1970 |
| Particles >14µm | ASTM D7647 >160 | 59 | 145 | 121 |
| Particles >21µm | ASTM D7647 >40 | 17 | 36 | 24 |
| Particles >38µm | ASTM D7647 >10 | 1 | 1 | 0 |
| Particles >71µm | ASTM D7647 >3 | 0 | 0 | 0 |
| Oil Cleanliness | ISO 4406 (c) >19/17/14 | 19/17/13 | ▲ 21/18/14 | ▲ 21/18/14 |



OIL ANALYSIS REPORT

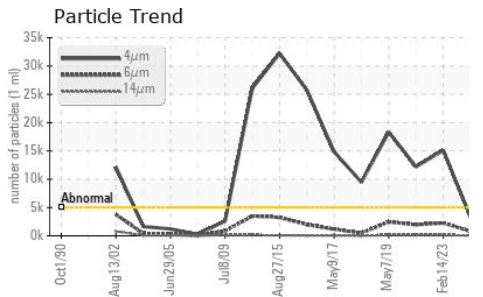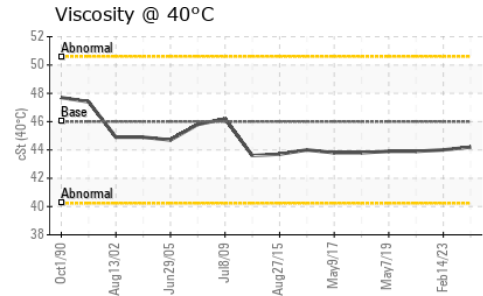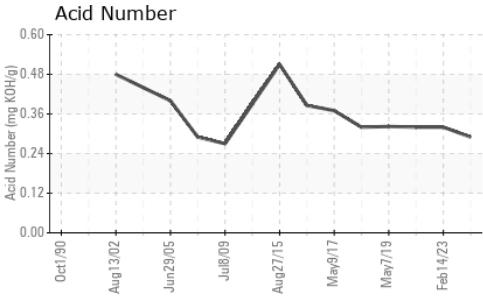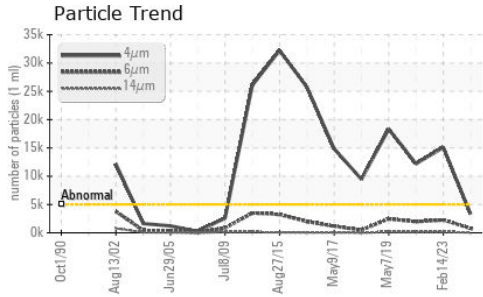


| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D974* | | 0.29 | 0.32 | 0.32 |




| VISUAL | | method | limit/base | current | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal | scalar | Visual* | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | Visual* | NONE | NONE | NONE | NONE |
| Precipitate | scalar | Visual* | NONE | NONE | NONE | NONE |
| Silt | scalar | Visual* | NONE | NONE | NONE | NONE |
| Debris | scalar | Visual* | NONE | NONE | NONE | VLITE |
| Sand/Dirt | scalar | Visual* | NONE | NONE | NONE | NONE |
| Appearance | scalar | Visual* | NORML | NORML | NORML | NORML |
| Odor | scalar | Visual* | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | Visual* | >0.05 | NEG | NEG | NEG |
| Free Water | scalar | Visual* | | NEG | NEG | NEG |

| FLUID PROPERTIES | | method | limit/base | current | history1 | history2 |
|------------------|-----|---------------|------------|-------------|----------|----------|
| Visc @ 40°C | cSt | ASTM D7279(m) | 46.0 | 44.2 | 44.0 | 43.9 |

| SAMPLE IMAGES | | method | limit/base | current | history1 | history2 |
|---------------|--|--------|------------|---------|----------|----------|
|---------------|--|--------|------------|---------|----------|----------|

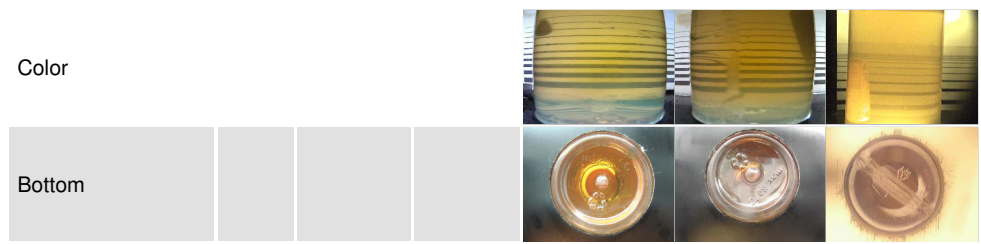

GRAPHS

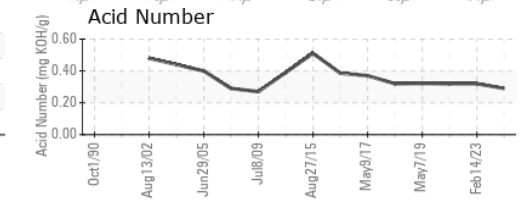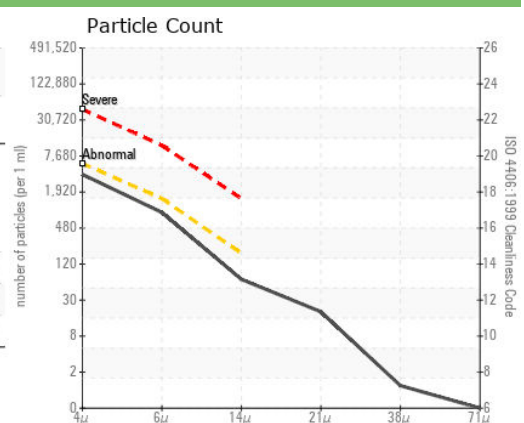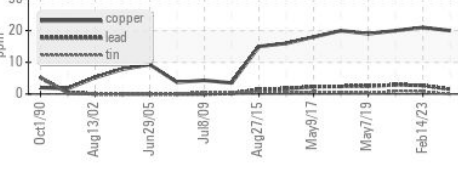

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0921778
Lab Number : **02623406**
Unique Number : 5748525
Test Package : IND 2
Received : 20 Mar 2024
Tested : 21 Mar 2024
Diagnosed : 21 Mar 2024 - Wes Davis

MARKDOM PLASTICS PRODUCTS LTD
 1220 BIRCHMOUNT RD
 TORONTO, ON
 CA M1P 2C6
 Contact: Joseph Kovacs
 joseph@markdom.com
 T: (416)752-4290
 F: (416)751-6638

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.