

**OIL ANALYSIS REPORT** 

Tin

Antimony

Vanadium

Beryllium


Cadmium

# Precision Stamping - P08500 A2403110

Component

**Unknown Component** 

GEAR OIL ISO 150 (--- GAL)





### Recommendation

We certify this oil to be clean, that the additives are at acceptable levels, and that it is suitable for use.

				Mar2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Batch #		Client Info		2024 03 0050		
Department		Client Info		Production		
Sample From		Client Info		Machine		
Production Stage		Client Info		Final		
Sent to WC		Client Info		03/18/2024		
Sample Number		Client Info		E30001702		
Sample Date		Client Info		15 Mar 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		16		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		0		
Lead	ppm	ASTM D5185(m)		2		
Copper	ppm	ASTM D5185(m)		5		

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	50	0		
Barium	ppm	ASTM D5185(m)	15	0		
Molybdenum	ppm	ASTM D5185(m)	15	0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)	50	3		
Calcium	ppm	ASTM D5185(m)	50	5		
Phosphorus	ppm	ASTM D5185(m)	350	433		
Zinc	ppm	ASTM D5185(m)	100	92		
Sulfur	ppm	ASTM D5185(m)	12500	4942		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	;	method	limit/base	current	history1	history2

ASTM D5185(m)

ASTM D5185(m)

ASTM D5185(m)

ASTM D5185(m)

ASTM D5185(m)

ppm

ppm

ppm

ppm

ppm

0

0

<1


0

0

CONTAMINANT	rs	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		0		
Sodium	ppm	ASTM D5185(m)		<1		
Potassium	ppm	ASTM D5185(m)	>20	0		
Water	%	ASTM D6304*		0.002		
ppm Water	ppm	ASTM D6304*		17		



## **OIL ANALYSIS REPORT**

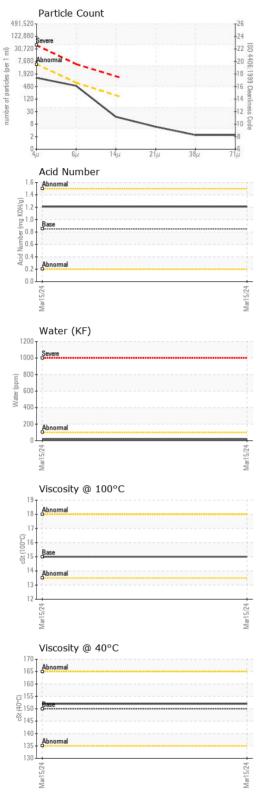

FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	1110		
Particles >6µm		ASTM D7647	>640	458		
Particles >14μm		ASTM D7647	>160	15		
Particles >21µm		ASTM D7647	>40	5		
Particles >38µm		ASTM D7647	>10	2		
Particles >71µm		ASTM D7647	>3	2		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	17/16/11		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.85	1.21		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
<b>Emulsified Water</b>	scalar	Visual*		NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	150	152		
Visc @ 100°C	cSt	ASTM D7279(m)	15.0	15.0		
Viscosity Index (VI)	Scale	ASTM D2270*	99	98		
SAMPLE IMAGES	3	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No.

Lab Number : 02623545

: E30001702 Unique Number : 5748664

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 Received **Tested** 

: 21 Mar 2024 Diagnosed : 22 Mar 2024 - Tatiana Sorkina Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, TAN Man, VI)

: 20 Mar 2024

To discuss this sample report, contact Customer Service at 1-905-372-2251.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

**Environmental 360 Solutions Ltd.** 

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939

F: (905)373-4950

Contact/Location: Tatiana Sorkina - CHECOB