




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

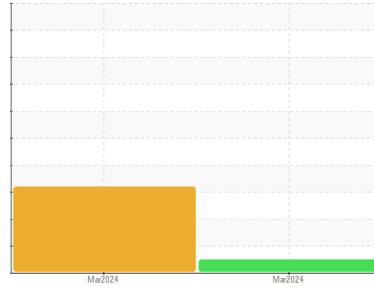

Area
CONSTRUCTION POLARIS CMM INC [02622906]
 Machine Id
JLG G1055A 5107 (S/N 0160040964)
 Component
Hydraulic System
 Fluid
PANOLIN HLP SYNTH 46 (144 LTR)

DIAGNOSIS

Recommendation

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Wear

Les taux d'usure de tous les composants sont normaux.

Contamination

Il y a une faible concentration (<5.0%) d'huile minérale présente dans le fluide. La propreté du système est acceptable pour votre objectif de propreté ISO 4406. La teneur en eau est négligeable. La propreté du système et du fluide est acceptable.

Fluid Condition

Le AN est acceptable pour ce fluide. L'état de l'huile permet d'en prolonger l'utilisation.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC	WC	---
Sample Date	Client Info	15 Mar 2024	01 Mar 2024	---
Machine Age	hrs Client Info	9460	9452	---
Oil Age	hrs Client Info	0	0	---
Oil Changed	Client Info	N/A	N/A	---
Sample Status		NORMAL	ABNORMAL	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185(m)	>20	2	5	---
Chromium ppm ASTM D5185(m)	>10	<1	1	---
Nickel ppm ASTM D5185(m)	>10	0	<1	---
Titanium ppm ASTM D5185(m)		0	0	---
Silver ppm ASTM D5185(m)		0	0	---
Aluminum ppm ASTM D5185(m)	>10	0	2	---
Lead ppm ASTM D5185(m)	>10	0	<1	---
Copper ppm ASTM D5185(m)	>75	<1	<1	---
Tin ppm ASTM D5185(m)	>10	0	0	---
Antimony ppm ASTM D5185(m)		0	0	---
Vanadium ppm ASTM D5185(m)		0	0	---
Beryllium ppm ASTM D5185(m)		0	0	---
Cadmium ppm ASTM D5185(m)		0	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185(m)	0	0	2	---
Barium ppm ASTM D5185(m)	0	0	0	---
Molybdenum ppm ASTM D5185(m)	0	0	1	---
Manganese ppm ASTM D5185(m)	0	0	0	---
Magnesium ppm ASTM D5185(m)	0	3	9	---
Calcium ppm ASTM D5185(m)	0	22	61	---
Phosphorus ppm ASTM D5185(m)	1700	1513	1390	---
Zinc ppm ASTM D5185(m)	0	27	72	---
Sulfur ppm ASTM D5185(m)	1350	1345	1525	---
Lithium ppm ASTM D5185(m)		<1	<1	---

CONTAMINANTS






method	limit/base	current	history1	history2
Silicon ppm ASTM D5185(m)	>20	3	11	---
Sodium ppm ASTM D5185(m)		<1	2	---
Potassium ppm ASTM D5185(m)	>20	<1	2	---
Water % ASTM D6304*	>0.05	0.019	0.013	---
ppm Water ppm ASTM D6304*	>500	196	137	---

INFRA-RED

method	limit/base	current	history1	history2
Soot % ASTM D7844*		0	0	---
Nitration Abs/cm ASTM D7624*		3.9	3.9	---
Sulfation Abs/.1mm ASTM D7415*		151.7	152.3	---
Mineral Oil Content % ASTM D7418*	<5.0%	<5.0	7.5	---



OIL ANALYSIS REPORT

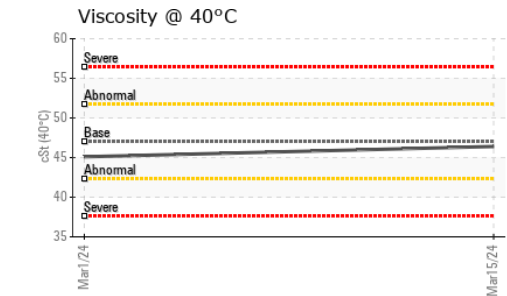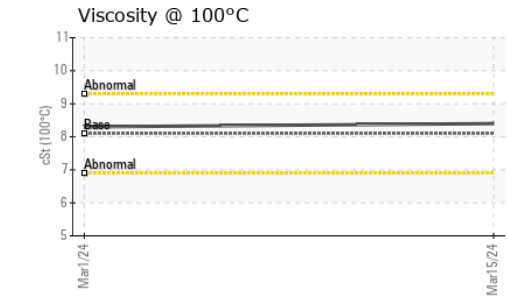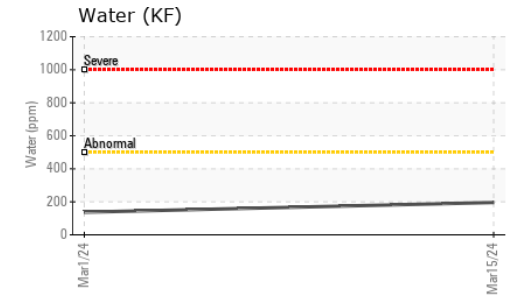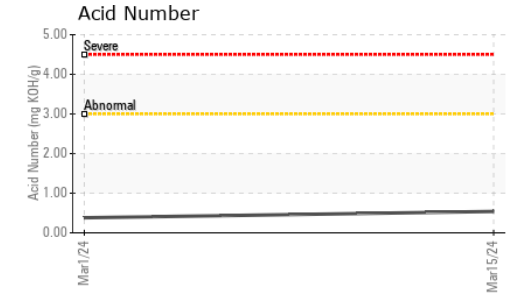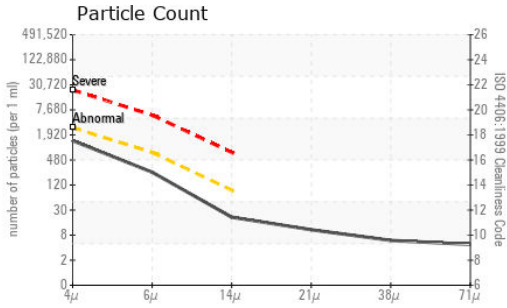

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC **Received** : 20 Mar 2024
Lab Number : **02623585** **Tested** : 21 Mar 2024
Unique Number : 5748704 **Diagnosed** : 21 Mar 2024 - Kevin Marson
Test Package : MOB 2 (Additional Tests: TAN Man)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.


FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	1226	▲ 8300	---
Particles >6µm	ASTM D7647	>640	215	● 1086	---
Particles >14µm	ASTM D7647	>80	18	39	---
Particles >21µm	ASTM D7647	>20	9	9	---
Particles >38µm	ASTM D7647	>4	5	1	---
Particles >71µm	ASTM D7647	>3	4	1	---
Oil Cleanliness	ISO 4406 (c)	>18/16/13	17/15/11	▲ 20/17/12	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	152.2	147.4	---
Acid Number (AN)	mg KOH/g	ASTM D974*	0.54	0.38	---

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	NEG	NEG	---
Free Water	scalar	Visual*	NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46.4	45.1	---
Visc @ 100°C	cSt	ASTM D7279(m)	8.4	8.3	---
Viscosity Index (VI)	Scale	ASTM D2270*	158	161	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					no image
Bottom					no image

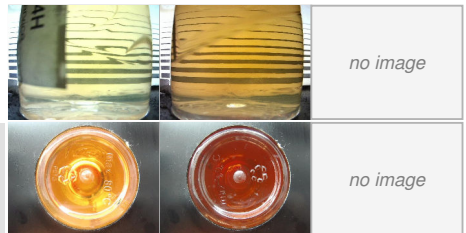

Envirolin Canada
 520 rue Adanac
 Quebec, QC
 CA G1C 7B7
 Contact: Patrick Levesque
 patrick.levesque@envirolin.com
 T: (418)623-1216
 F: (418)660-8889



MINERAL OIL CONTENT REPORT

PASS




Area
CONSTRUCTION POLARIS CMM INC [02622906]
 Machine Id
JLG G1055A 5107 (S/N 0160040964)
 Component
Hydraulic System
 Fluid
PANOLIN HLP SYNTH 46 (144 LTR)


SPECTRAL ANALYSIS

		method	limit/base	current	history1	history2
Zinc	ppm	ASTM D5185(m)	0	27	72	---
Mineral Oil Content	%	ASTM D7418*	<5.0%	<5.0	7.5	---


FT-IR - Esters I

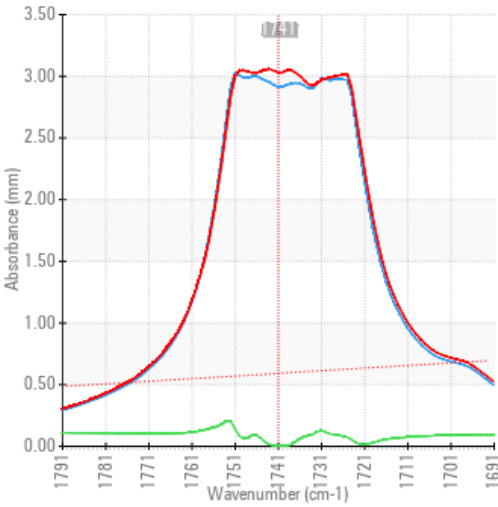

FT-IR - Esters II

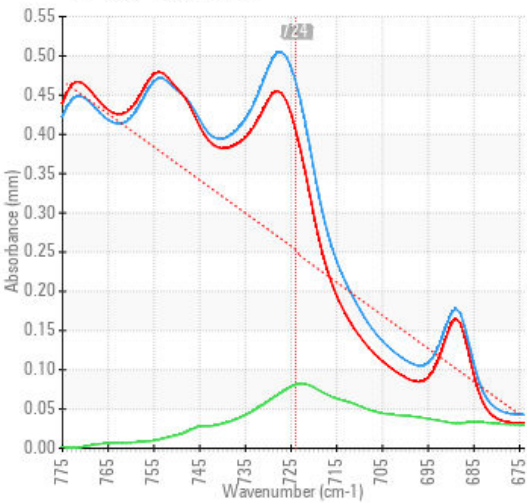

FT-IR Spectrum (Absorbance)

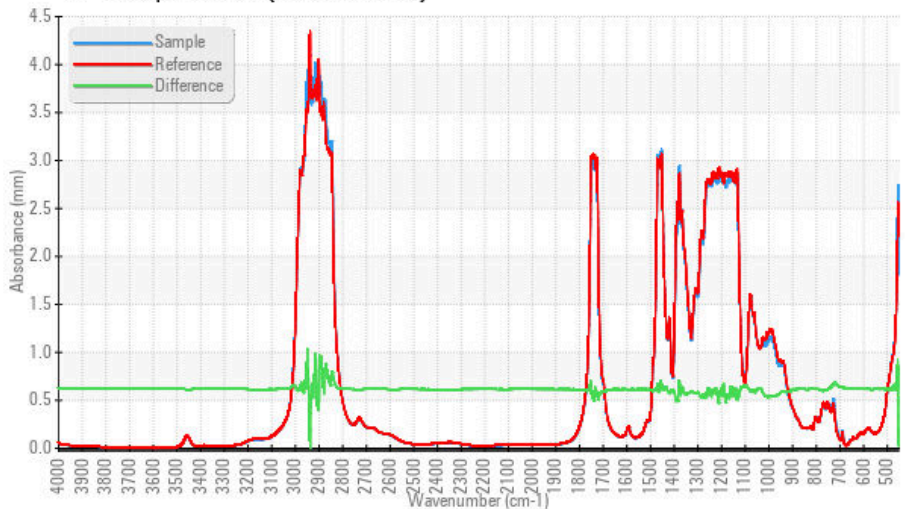

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC
Lab Number : 02623585
Unique Number : 5748704
Test Package : MOB 2 (Additional Tests: TAN Man)
Received : 20 Mar 2024
Tested : 21 Mar 2024
Diagnosed : 21 Mar 2024 - Kevin Marson

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Envirolin Canada

520 rue Adanac
 Quebec, QC
 CA G1C 7B7
 Contact: Patrick Levesque
 patrick.levesque@envirolin.com
 T: (418)623-1216
 F: (418)660-8889

This page left intentionally blank