

### **OIL ANALYSIS REPORT**

# Crown Metal - C02400 A2403128

Component **Unknown Component** HYDRAULIC 220 ZNT (--- GAL)

### Recommendation

We certify that this oil is clean and suitable for use. Wear

Aluminum ppm levels are noted.

				Mar2024		
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Batch #		Client Info		2024 03 0100		
Department		Client Info		Production		
Production Stage		Client Info		Final		
Sent to WC		Client Info		03/19/2024		
Sample Number		Client Info		E30001711		
Sample Date		Client Info		19 Mar 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		3		
Chromium	ppm	ASTM D5185(m)		0		
Nickel	ppm	ASTM D5185(m)		<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)		14		
Lead	ppm	ASTM D5185(m)		1		
Copper	ppm	ASTM D5185(m)		6		
Tin	ppm	ASTM D5185(m)		0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		0		
Barium	ppm	ASTM D5185(m)		<1		
Molybdenum	ppm	ASTM D5185(m)		0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)		13		
Calcium	ppm	ASTM D5185(m)		64		
Phosphorus	ppm	ASTM D5185(m)		175		
Zinc	ppm	ASTM D5185(m)		138		
Sulfur	ppm	ASTM D5185(m)		630		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		6		
Sodium	ppm	ASTM D5185(m)		2		
Potassium	ppm	ASTM D5185(m)	>20	0		
Water	%	ASTM D6304*		0.003		
ppm Water	ppm	ASTM D6304*		27		

## Sample Rating Trend



NORMAL







Mar19/2

6

f particles (1 ml) 84 k 24 k

la 2k 1k <sub>0k</sub> Linne Mar19/24

回流

Particle Trend

4um

•6μm •14μm

# **OIL ANALYSIS REPORT**


FLUID CLEANLINESS

Particles >4µm

Particles >6µm

Particles >14µm

Particles >21µm

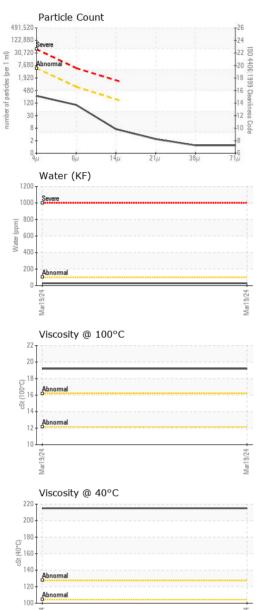

	14 Lean	Particles >2 1µm		ASTIVI D7647	>40	2		
T	-14 min -12 ss	Particles >38µm		ASTM D7647	>10	1		
	12 8 10 G	Particles >71µm		ASTM D7647	>3	1		
	-8	Oil Cleanliness		ISO 4406 (c)	>19/16/14	15/14/10		
14μ 21μ 3	38µ 71µ		TION					
τμ <u>ε</u> ημ σ	50µ 11µ	FLUID DEGRADA	TION	method	limit/base	current	history1	history2
		Acid Number (AN)	mg KOH/g	ASTM D974*		0.36		
		VISUAL		method	limit/base	current	history1	history2
		White Metal	scalar	Visual*	NONE	NONE		
		Yellow Metal	scalar	Visual*	NONE	NONE		
		Precipitate	scalar	Visual*	NONE	NONE		
		Silt	scalar	Visual*	NONE	NONE		
******		Debris	scalar	Visual*	NONE	NONE		
	Mar1 9/24							
	Mar	Sand/Dirt	scalar	Visual*	NONE	NONE		
°C		Appearance	scalar	Visual*	NORML	NORML		
		Odor	scalar	Visual*	NORML	NORML		
		Emulsified Water	scalar	Visual*		NEG		
		Free Water	scalar	Visual*		NEG		
		FLUID PROPERT	IES	method	limit/base	current	history1	history2
		Visc @ 40°C	cSt	ASTM D7279(m)		215		
		Visc @ 100°C	cSt	ASTM D7279(m)		19.2		
		Viscosity Index (VI)	Scale	ASTM D2270*		100		
	Mar19/24	,						
	Mar	SAMPLE IMAGES	3	method	limit/base	current	history1	history2
С								
		Color					na imaga	na imaga
		00101					no image	no image
		Bottom					no image	no image
		Dottom					noimage	no image
	/24							
	Mar1 9/24							
	2							
	9/24							
	Mar19/24							
	Laboratory	: WearCheck - C8-1175		/Line Burlin	aton ONI7	5H9 Envir	onmental 360	Solutions Ltd.
	Sample No.	: E30001711	Recei		Mar 2024			Victoria Street
ISO 17025:2017	Lab Number		Teste		2 Mar 2024			Cobourg, ON
Accredited	Unique Number	: 5748969	Diagn	iosed : 25	Mar 2024 - Tatia	na Sorkina		CA K9A 5H5
Laboratory		: IND 2 ( Additional Tes				n, VI)		Tatiana Sorkina
		contact Customer Servi						kina@e360s.ca
		e of accreditation, (m) me						(800)263-3939
validity of resul	us and interpret	ation are based on the s	ampie a	na informatio	ni as supplie	и.	F:	(905)373-4950
1101 00600050 (0000	oratod: 02/25/2024	10-18-26) Pove 2				Contact/Locatio	n: Tatiana Sad	
/IS] 02623850 (Gene	eraleu. 03/23/2024	· 10.10.00) nev. 2				Comaci/Locatio	n. Taliana Son	
								Page 2 of 2

ASTM D7647 >5000

ASTM D7647 >640

ASTM D7647 >160

ASTM D7647 >40

234

87

6

2

---

---