

## **OIL ANALYSIS REPORT**

Sample Rating Trend

WEAR



#### DIAGNOSIS

#### Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL ISO 150. Please confirm. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

#### 🛑 Wear

Iron ppm levels are noted. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.


#### Fluid Condition

The oil viscosity is higher than typical. The condition of the oil is acceptable for the time in service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0909079		
Sample Date		Client Info		20 Mar 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ATTENTION		
CONTAMINATIO	۷	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		58		
Iron	ppm	ASTM D5185(m)	>200	<u> </u>		
Chromium	ppm	ASTM D5185(m)	>15	3		
Nickel	ppm	ASTM D5185(m)	>15	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>25	0		
Lead	ppm	ASTM D5185(m)	>100	0		
Copper	ppm	ASTM D5185(m)	>200	<1		
Tin	ppm	ASTM D5185(m)	>25	0		
Antimony	ppm	ASTM D5185(m)	>5	0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	50	17		
Barium	ppm	ASTM D5185(m)	15	14		
Molybdenum	ppm	ASTM D5185(m)	15	0		
Manganese	ppm	ASTM D5185(m)		3		
Magnesium	ppm	ASTM D5185(m)	50	<1		
Calcium	ppm	ASTM D5185(m)	50	15		
Phosphorus	ppm	ASTM D5185(m)	350	304		
Zinc	ppm	ASTM D5185(m)	100	10		
Sulfur	ppm	ASTM D5185(m)	12500	12856		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>50	<1		
Sodium	ppm	ASTM D5185(m)		2		
Potassium	ppm	ASTM D5185(m)	>20	1		



# **OIL ANALYSIS REPORT**

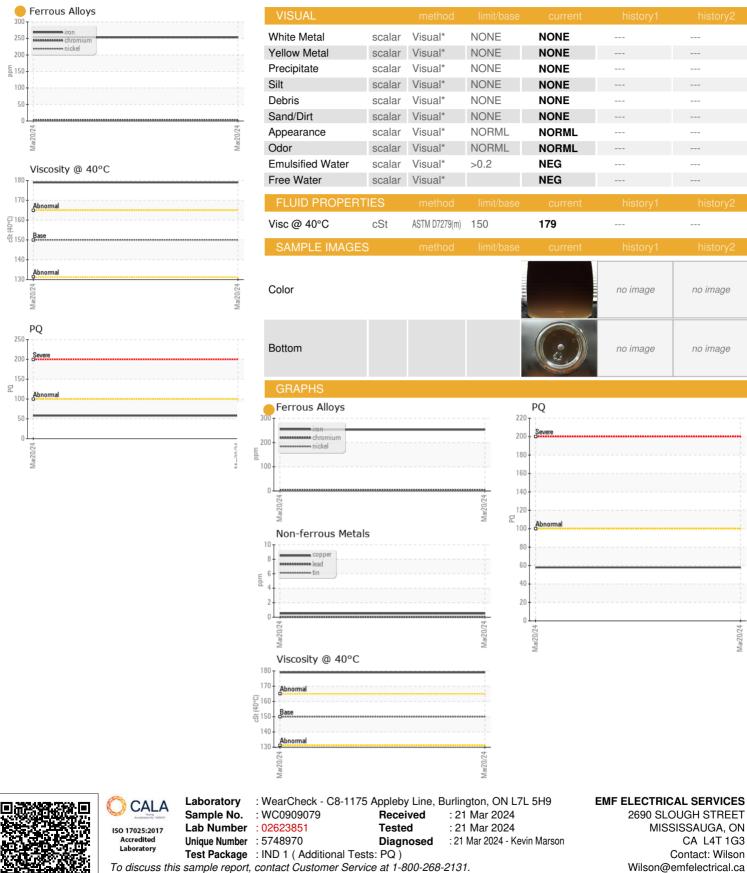

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. Validity of results and interpretation are based on the sample and information as supplied.

F:

CA L4T 1G3

Contact: Wilson

T: (905)405-8836

no image

no image