




# OIL ANALYSIS REPORT

Sample Rating Trend

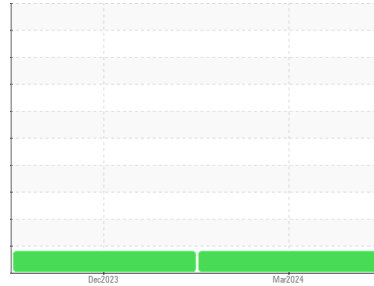

**WEAR**



Machine Id  
**SS 1-6**

Component  
**Gearbox**

Fluid  
**GEAR OIL ISO 150 (--- LTR)**

## DIAGNOSIS

### ▲ Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

### ▲ Wear

Iron ppm levels are abnormal. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0909073</b>	WC0877658	---
Sample Date	Client Info		<b>20 Mar 2024</b>	05 Dec 2023	---
Machine Age	hrs	Client Info	<b>0</b>	0	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>N/A</b>	N/A	---
Sample Status			<b>ABNORMAL</b>	ABNORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184*		<b>60</b>	207	---
Iron	ppm	ASTM D5185(m) >200	<b>▲ 363</b>	▲ 294	---
Chromium	ppm	ASTM D5185(m) >15	<b>2</b>	3	---
Nickel	ppm	ASTM D5185(m) >15	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)	<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185(m) >25	<b>0</b>	<1	---
Lead	ppm	ASTM D5185(m) >100	<b>0</b>	0	---
Copper	ppm	ASTM D5185(m) >200	<b>1</b>	<1	---
Tin	ppm	ASTM D5185(m) >25	<b>0</b>	0	---
Antimony	ppm	ASTM D5185(m) >5	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	0	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	0	---

## ADDITIVES




	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 50	<b>27</b>	20	---
Barium	ppm	ASTM D5185(m) 15	<b>7</b>	8	---
Molybdenum	ppm	ASTM D5185(m) 15	<b>0</b>	0	---
Manganese	ppm	ASTM D5185(m)	<b>2</b>	5	---
Magnesium	ppm	ASTM D5185(m) 50	<b>0</b>	<1	---
Calcium	ppm	ASTM D5185(m) 50	<b>4</b>	12	---
Phosphorus	ppm	ASTM D5185(m) 350	<b>320</b>	311	---
Zinc	ppm	ASTM D5185(m) 100	<b>7</b>	27	---
Sulfur	ppm	ASTM D5185(m) 12500	<b>13230</b>	12382	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	<1	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >50	<b>1</b>	3	---
Sodium	ppm	ASTM D5185(m)	<b>&lt;1</b>	2	---
Potassium	ppm	ASTM D5185(m) >20	<b>0</b>	1	---




# OIL ANALYSIS REPORT

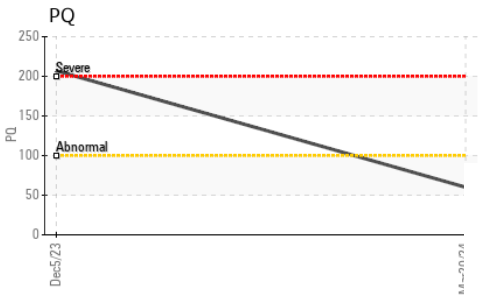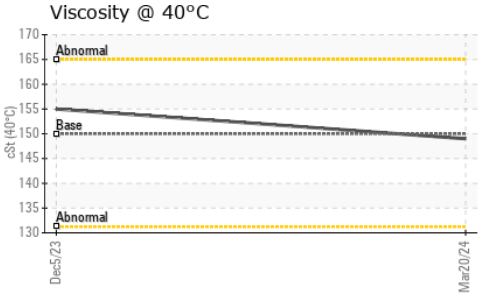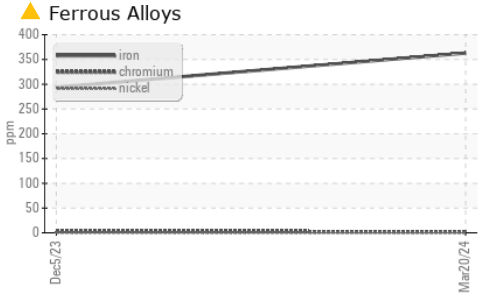





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	LIGHT
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	150	149	155

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

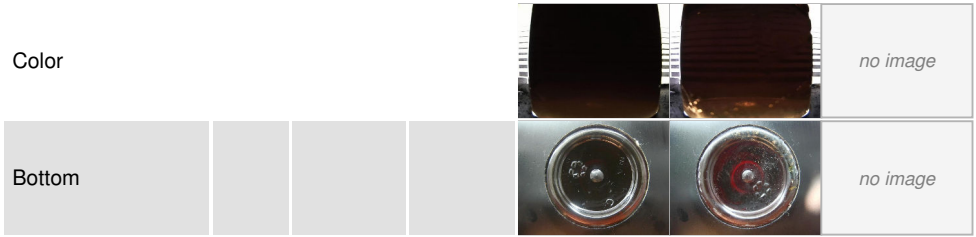

## GRAPHS

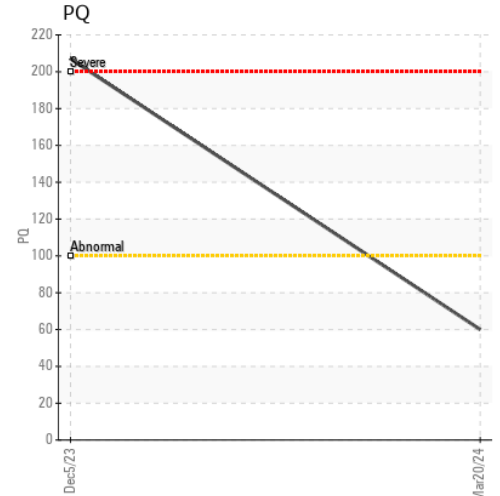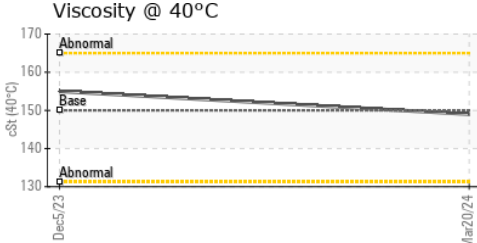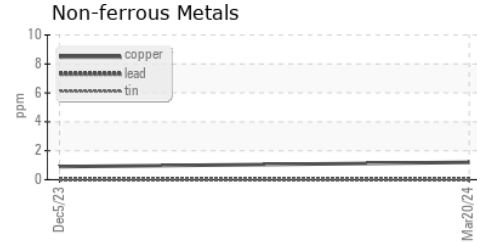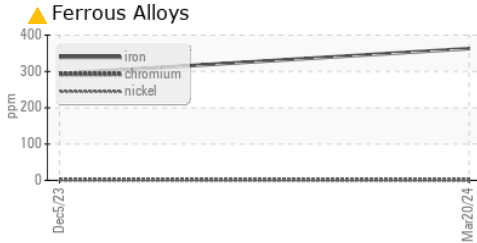

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0909073 **Received** : 21 Mar 2024  
**Lab Number** : 02623856 **Tested** : 21 Mar 2024  
**Unique Number** : 5748975 **Diagnosed** : 21 Mar 2024 - Kevin Marson  
**Test Package** : IND 1 ( Additional Tests: PQ )

**EMF ELECTRICAL SERVICES**  
 2690 SLOUGH STREET  
 MISSISSAUGA, ON  
 CA L4T 1G3  
 Contact: Wilson  
 Wilson@emfelectrical.ca  
 T: (905)405-8836  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.