



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**Valtra Jordan's Valtra**

Component  
**Diesel Engine**

Fluid  
**SAE 0W40 (19 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MOB 2 test kits, this testkit includes BN to determine the suitability of the oil for continued use.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0884212</b>	---	---
Sample Date	Client Info		<b>08 Mar 2024</b>	---	---
Machine Age	hrs	Client Info	<b>2711</b>	---	---
Oil Age	hrs	Client Info	<b>280</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	---	---
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	<b>7</b>	---	---
Chromium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m) >4	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m) >3	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185(m) >20	<b>4</b>	---	---
Lead	ppm	ASTM D5185(m) >40	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185(m) >330	<b>2</b>	---	---
Tin	ppm	ASTM D5185(m) >15	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>125</b>	---	---
Barium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	<b>96</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)	<b>32</b>	---	---
Calcium	ppm	ASTM D5185(m)	<b>2087</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	<b>920</b>	---	---
Zinc	ppm	ASTM D5185(m)	<b>1062</b>	---	---
Sulfur	ppm	ASTM D5185(m)	<b>3645</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---

## CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>4</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624* >20	<b>9.2</b>	---	---
Sulfation	Abs./1mm	ASTM D7415* >30	<b>30.8</b>	---	---



# OIL ANALYSIS REPORT







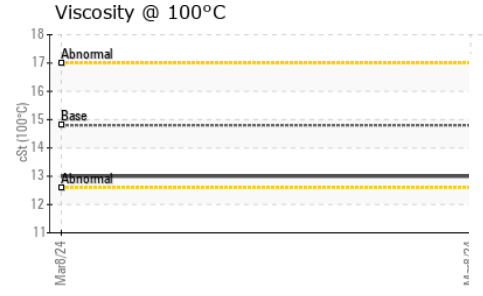
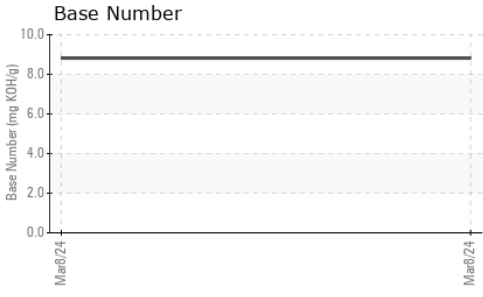


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>37.0</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*		<b>8.82</b>	---	---

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.8	<b>13.0</b>	---	---

## GRAPHS

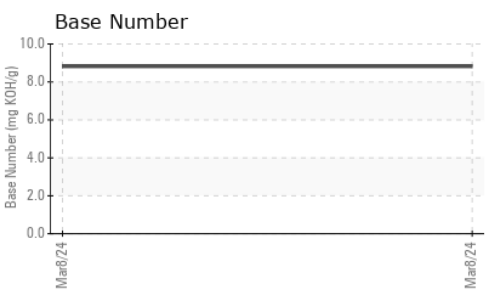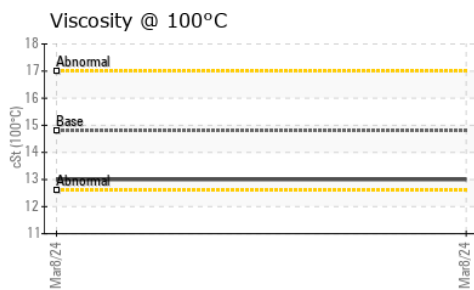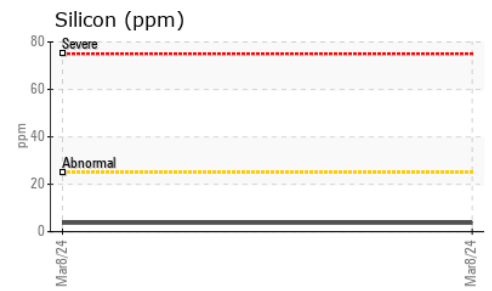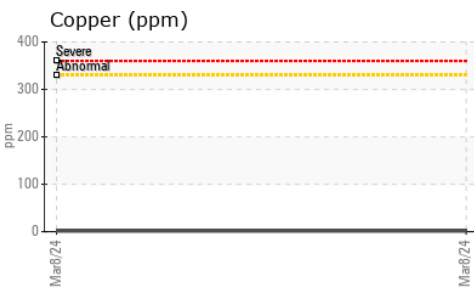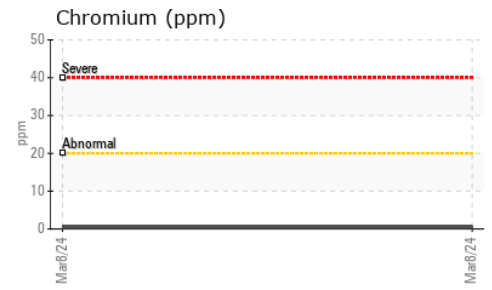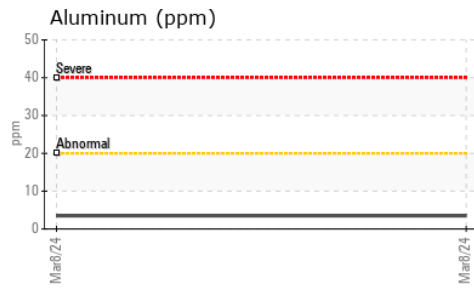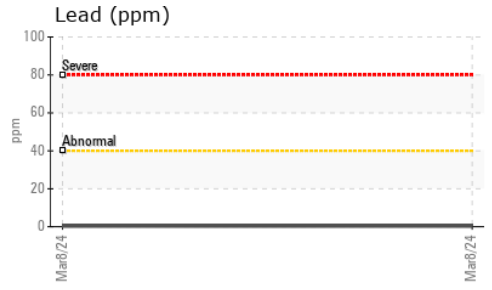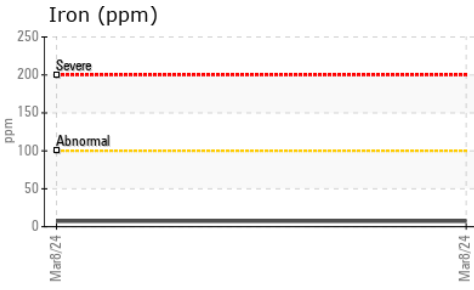

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **Silver Wings Farm & Seed Cleaning Ltd**  
**Sample No.** : WC0884212 **Received** : 22 Mar 2024 RR1 Site 5 Box 4  
**Lab Number** : **02623892** **Tested** : 22 Mar 2024 Waskatenau, AB  
**Unique Number** : 5749011 **Diagnosed** : 22 Mar 2024 - Kevin Marson CA T0A 3P0  
**Test Package** : MOB 2 Contact: Jordan Boychuk  
jordanbch@gmail.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.