



OIL ANALYSIS REPORT

Sample Rating Trend


NORMAL



Machine Id
TICO 827-8977

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

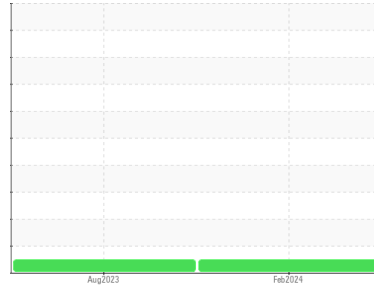

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0889836	WC0818410	---
Sample Date	Client Info			23 Feb 2024	11 Aug 2023	---
Machine Age	hrs	Client Info		2693	2186	---
Oil Age	hrs	Client Info		0	0	---
Oil Changed	Client Info			Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	---
Water	WC Method	>0.2		NEG	NEG	---
Glycol	WC Method			NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	45	61	---
Chromium	ppm	ASTM D5185(m)	>20	1	1	---
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)	>3	0	0	---
Aluminum	ppm	ASTM D5185(m)	>20	5	3	---
Lead	ppm	ASTM D5185(m)	>40	0	0	---
Copper	ppm	ASTM D5185(m)	>330	2	4	---
Tin	ppm	ASTM D5185(m)	>15	0	<1	---
Antimony	ppm	ASTM D5185(m)		0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	57	3	---
Barium	ppm	ASTM D5185(m)	10	<1	<1	---
Molybdenum	ppm	ASTM D5185(m)	100	86	6	---
Manganese	ppm	ASTM D5185(m)		0	<1	---
Magnesium	ppm	ASTM D5185(m)	450	97	24	---
Calcium	ppm	ASTM D5185(m)	3000	2130	2121	---
Phosphorus	ppm	ASTM D5185(m)	1150	883	858	---
Zinc	ppm	ASTM D5185(m)	1350	1051	971	---
Sulfur	ppm	ASTM D5185(m)	4250	2879	2764	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	6	7	---
Sodium	ppm	ASTM D5185(m)	>158	2	2	---
Potassium	ppm	ASTM D5185(m)	>20	1	2	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	1.6	1.4	---
Nitration	Abs/cm	ASTM D7624*	>20	12.0	10.3	---
Sulfation	Abs.1mm	ASTM D7415*	>30	25.3	23.3	---



OIL ANALYSIS REPORT

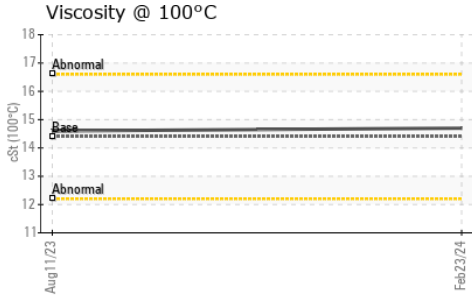

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	18.8	14.8


VISUAL

	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	14.7	14.6

GRAPHS

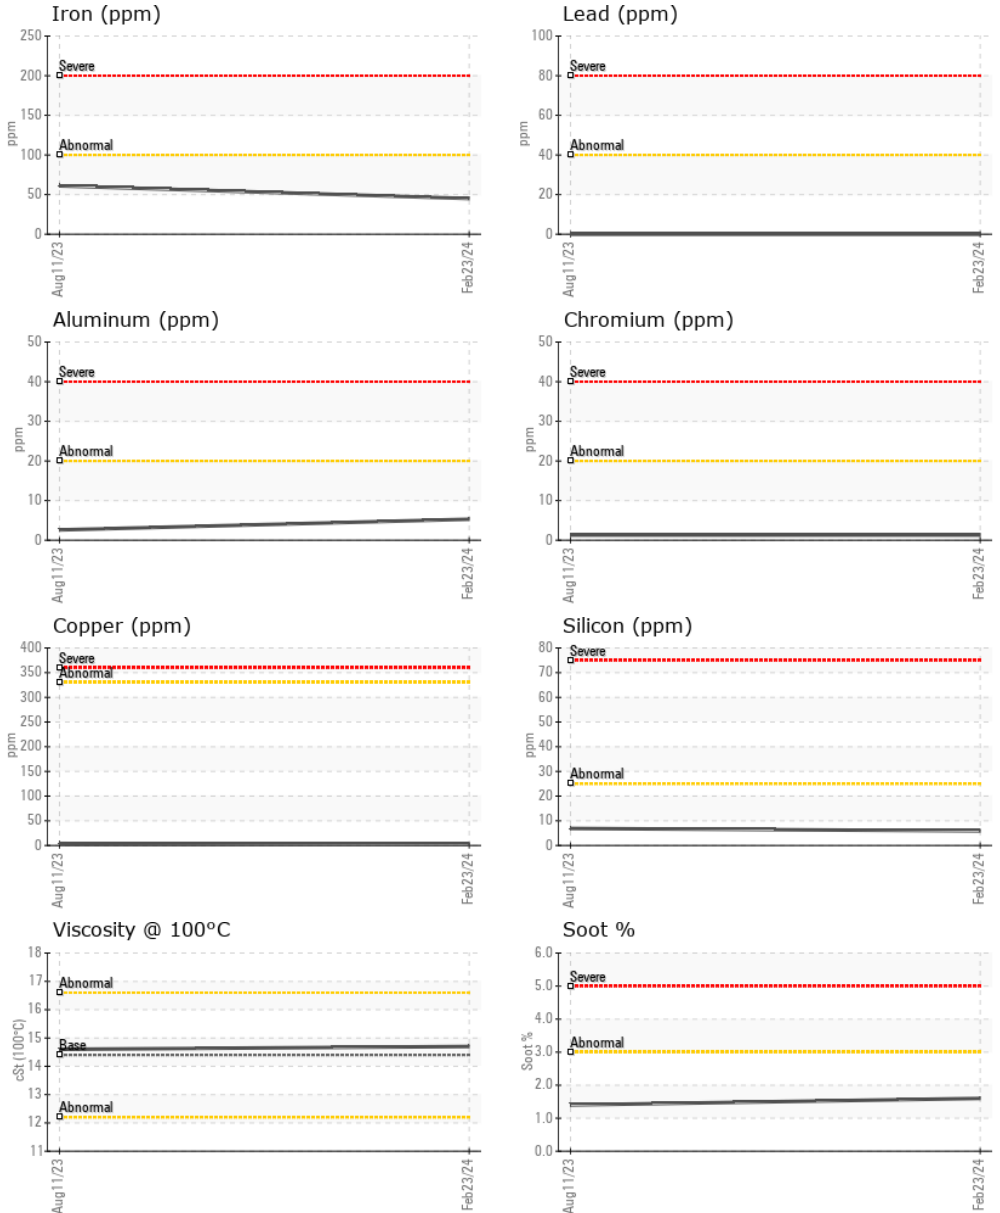

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0889836 **Received** : 22 Mar 2024
Lab Number : 02623927 **Tested** : 22 Mar 2024
Unique Number : 5749046 **Diagnosed** : 22 Mar 2024 - Wes Davis
Test Package : MOB 1

BRITANNIA FLEET SERVICES
 1831 SHAWSON DRIVE (SHOP)
 MISSISSAUGA, ON
 CA L4W 1T9
 Contact: Tania Henriques
 tania.henriques@britanniafleet.ca
 T: (905)670-4545
 F: (905)670-9036

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.