




OIL ANALYSIS REPORT

Sample Rating Trend

VISCOSITY

Area
CFR# 72335 [202157]
 Machine Id
202DA
 Component
Transmission
 Fluid
SAE 5W30 (--- GAL)

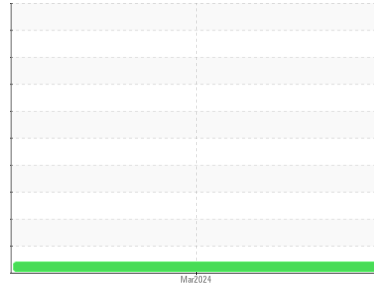

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The fluid viscosity is lower than typical, possibly indicating the addition of lighter grade fluid. The condition of the fluid is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0848506	---	---
Sample Date	Client Info		18 Mar 2024	---	---
Machine Age	hrs	Client Info	137	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		Not Chngd	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >200	9	---	---
Chromium	ppm	ASTM D5185(m) >25	0	---	---
Nickel	ppm	ASTM D5185(m)	<1	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m) >15	2	---	---
Aluminum	ppm	ASTM D5185(m) >35	9	---	---
Lead	ppm	ASTM D5185(m) >100	7	---	---
Copper	ppm	ASTM D5185(m) >150	54	---	---
Tin	ppm	ASTM D5185(m) >20	3	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES


	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	43	---	---
Barium	ppm	ASTM D5185(m)	1	---	---
Molybdenum	ppm	ASTM D5185(m)	69	---	---
Manganese	ppm	ASTM D5185(m)	0	---	---
Magnesium	ppm	ASTM D5185(m)	454	---	---
Calcium	ppm	ASTM D5185(m)	1400	---	---
Phosphorus	ppm	ASTM D5185(m)	711	---	---
Zinc	ppm	ASTM D5185(m)	791	---	---
Sulfur	ppm	ASTM D5185(m)	2129	---	---
Lithium	ppm	ASTM D5185(m)	3	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >100	3	---	---
Sodium	ppm	ASTM D5185(m)	2	---	---
Potassium	ppm	ASTM D5185(m) >20	4	---	---



OIL ANALYSIS REPORT

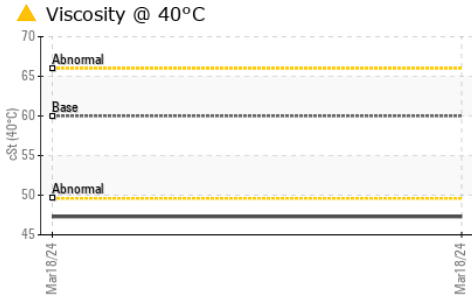


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	---	---
Precipitate	scalar	Visual*	NONE	---	---
Silt	scalar	Visual*	NONE	---	---
Debris	scalar	Visual*	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	---	---
Appearance	scalar	Visual*	NORML	---	---
Odor	scalar	Visual*	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	---	---
Free Water	scalar	Visual*	---	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	60.0 ▲ 47.3	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

GRAPHS

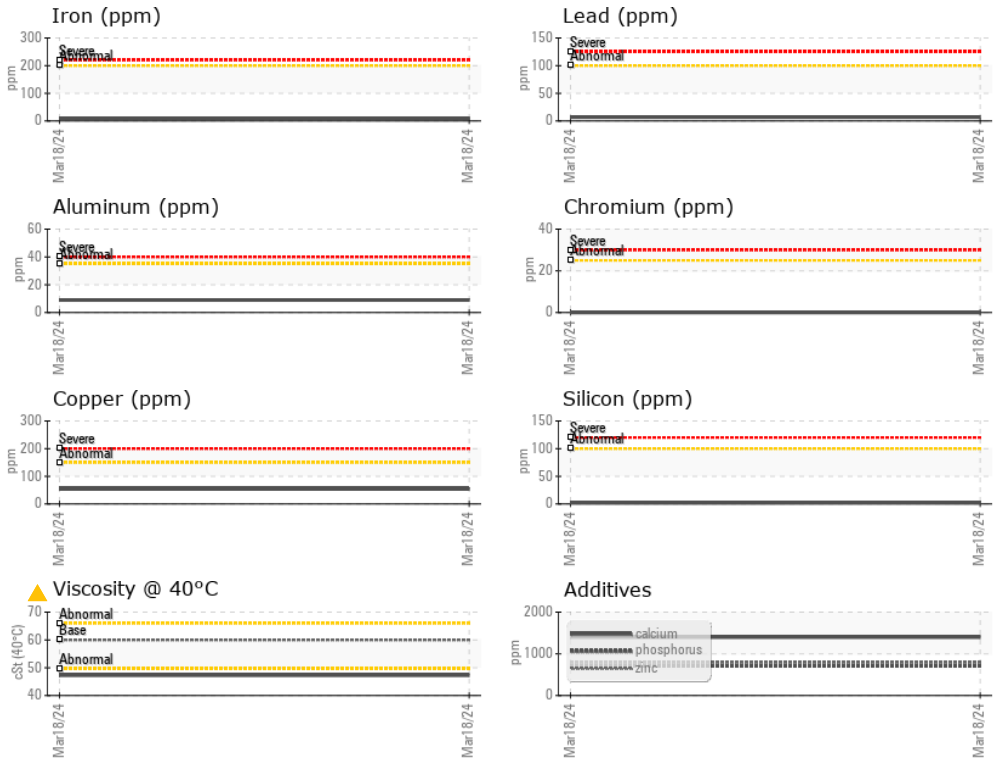

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0848506
Lab Number : 02623992
Unique Number : 5749111
Test Package : MOB 1

DEPARTMENT OF NATIONAL DEFENSE
 MGEN.GEORGE R.PEARKE BUILDING
 OTTAWA, ON
 CA K1A 0K2
 Contact: Jacques Brousseau
 jacques.brousseau2@forces.gc.ca
 T: (819)997-9989

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.