

FUEL REPORT

Sample Rating Trend



Area [WC12291] Machine Id UGG700097 Component

Diesel Fuel

Fluid No.2 DIESEL FUEL (ULTRALOW SULPHUR) (--- GAL)

DIAGNOSIS

Recommendation

Laboratory test indicate that this fuel is suitable for use and meets all test requirements. We advise that you filter this fluid before use. We recommend you service the filters on this component. Resample at the next service interval to monitor.

Contaminants

There is a light amount of silt (particulates < 14 microns in size) present in the fuel. The water content is negligible.


Fuel Condition

All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel (US EPA/CGSB-3.517-3 type B).

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KT0001038		
Sample Date		Client Info		20 Mar 2024		
Machine Age	hrs	Client Info		0		
Sample Status				ATTENTION		
PHYSICAL PROP	ERTIES	method	limit/base	current	history1	history2
Specific Gravity		ASTM D1298*	0.839	0.848		
Fuel Color	text	Visual Screen*	Yllow	Red		
Visc @ 40°C	cSt	ASTM D7279(m)	3.0	2.9		
Pensky-Martens Flash Point	°C	ASTM D7215*	52	58		
SULFUR CONTER	NT	method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185(m)	10	7		
DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D2887*	165	171		
5% Distillation Point	°C	ASTM D2887*		200		
10% Distill Point	°C	ASTM D2887*	201	211		
15% Distillation Point	°C	ASTM D2887*		218		
20% Distill Point	°C	ASTM D2887*	216	226		
30% Distill Point	°C	ASTM D2887*	230	240		
40% Distill Point	°C	ASTM D2887*	243	253		
50% Distill Point	°C	ASTM D2887*	255	266		
60% Distill Point	°C	ASTM D2887*	267	280		
70% Distill Point	°C	ASTM D2887*	280	294		
80% Distill Point	°C	ASTM D2887*	295	310		
85% Distillation Point	°C	ASTM D2887*		320		
90% Distill Point	°C	ASTM D2887*	310	330		
95% Distillation Point	°C	ASTM D2887*		343		
Final Boiling Point	°C	ASTM D2887*	341	367		
IGNITION QUALI	ΓY	method	limit/base	current	history1	history2
API Gravity		ASTM D1298*	37.7	35		
Cetane Index		ASTM D4737*	<40.0	47		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	<1.0	4		
Sodium	ppm	ASTM D5185(m)	<0.1	0		
Potassium	ppm	ASTM D5185(m)	<0.1	0		
Water	%	ASTM D6304*	<0.05	0.002		
ppm Water	ppm	ASTM D6304*	<500	18		
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	- 3559		
Particles >6µm		ASTM D7647	>640	494		
Particles >14µm		ASTM D7647	>80	32		
Particles >21µm		ASTM D7647	>20	8		
Particles >38µm		ASTM D7647	>4	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>18/16/13	e 19/16/12		



FUEL REPORT

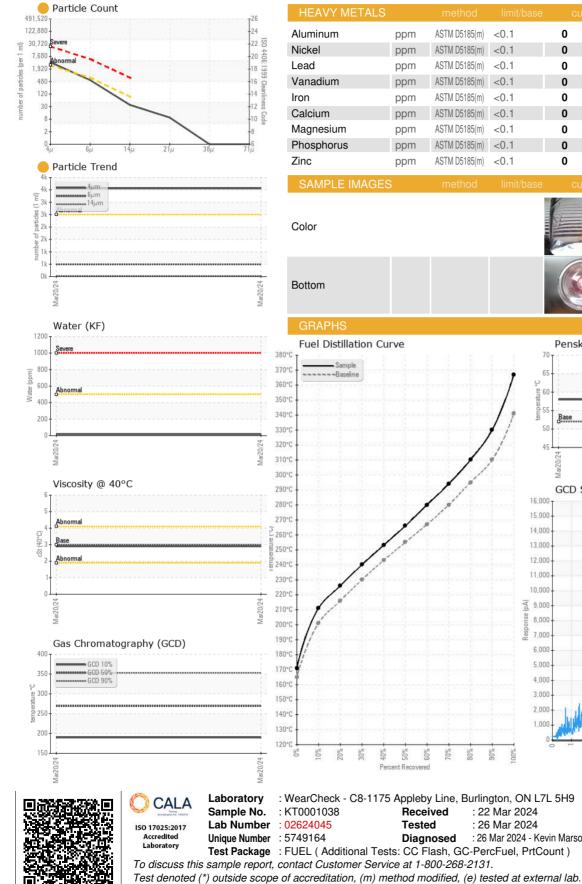

ASTM D5185(m) <0.1 0 no image no image no image no image Pensky-Martens Flash Point (°C)

: 22 Mar 2024

: 26 Mar 2024

: 26 Mar 2024 - Kevin Marson

<0.1

<0.1

< 0.1

<0.1

<0.1

< 0.1

<0.1

< 0.1

ASTM D5185(m)

ASTM D5185(m)

ASTM D5185(m)

ASTM D5185(m)

0

0

0


0

0

0

0


0

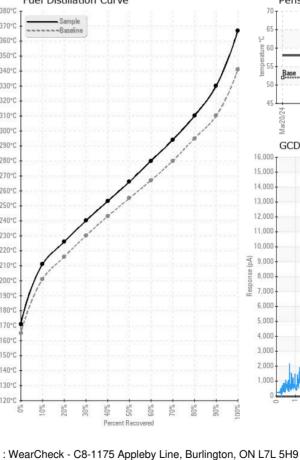

Validity of results and interpretation are based on the sample and information as supplied.





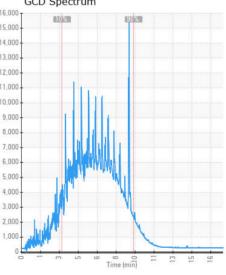

COLEMAN EQUIPMENT INC 3541 TRUSSLER RD NEW DUNDEE, ON CA NOB 2E0 Contact: Service Manager brad@coleman-equipment.com T: F:

Report Id: COL354NEW [WCAMIS] 02624045 (Generated: 03/26/2024 08:40:05) Rev: 1

Aar20.7