




# OIL ANALYSIS REPORT

Sample Rating Trend

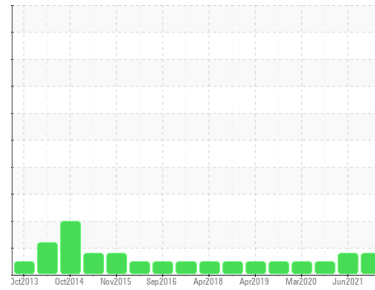

**WEAR**



Area

Equipment d`urgence/Salle des Machines

Machine Id

15J02B Compresseur d`air d`urgence (S/N 1401587)

Component

Air Compressor

Fluid

MOBIL RARUS 827 (8 LTR)

## DIAGNOSIS

### Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

### Wear

Tin ppm levels are abnormal. Piston wear is indicated.

### Contamination

The water content is negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0878519</b>	WC0477011	WC0392735
Sample Date	Client Info		<b>18 Mar 2024</b>	23 Jun 2021	26 Oct 2020
Machine Age	hrs	Client Info	<b>40</b>	24	50
Oil Age	hrs	Client Info	<b>18</b>	3	50
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	N/A
Sample Status			<b>ABNORMAL</b>	ABNORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>50	<b>8</b>	8	10
Chromium	ppm	ASTM D5185(m)	>4	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185(m)	>10	<b>4</b>	<1	3
Lead	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>5	<b>▲ 8</b>	<b>▲ 9</b>	4
Antimony	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES




	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		<b>&lt;1</b>	2	<1
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Calcium	ppm	ASTM D5185(m)		<b>0</b>	2	2
Phosphorus	ppm	ASTM D5185(m)		<b>372</b>	387	415
Zinc	ppm	ASTM D5185(m)		<b>&lt;1</b>	1	1
Sulfur	ppm	ASTM D5185(m)		<b>9</b>	456	17
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>0</b>	<1	1
Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	1
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	2
Water	%	ASTM D6304*	>0.6	<b>0.010</b>	---	---
ppm Water	ppm	ASTM D6304*	>6000	<b>109</b>	---	---




# OIL ANALYSIS REPORT

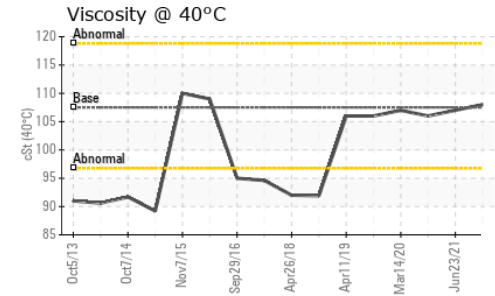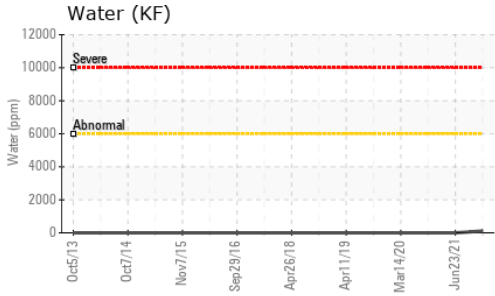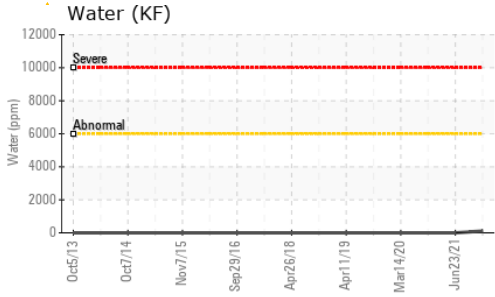




VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.6	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	107.5	107	106

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

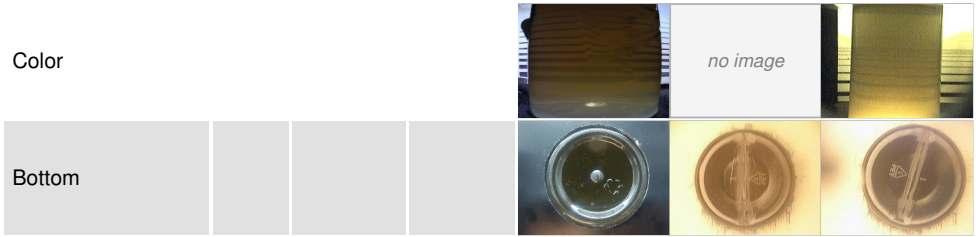

## GRAPHS

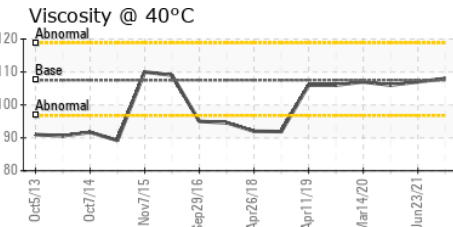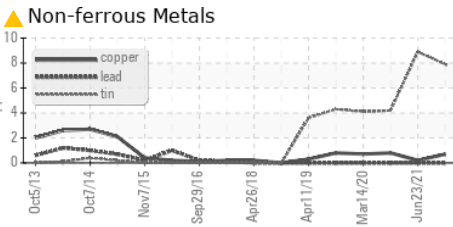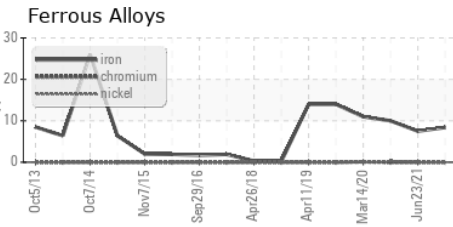

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0878519 **Received** : 25 Mar 2024  
**Lab Number** : **02624289** **Tested** : 26 Mar 2024  
**Unique Number** : 5749408 **Diagnosed** : 26 Mar 2024 - Kevin Marson  
**Test Package** : MAR 5 ( Additional Tests: ICP, KF, KV40, Spat, Visual )

**Canadian Coast Guard**  
 CCGS Amundsen, 101 Boul. Champlain  
 Quebec, QC  
 CA G1K 7Y7  
 Contact: Chief Engineer  
 amundsense@ccgs-ngcc.gc.ca  
 T: (418)953-8233  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.