



# OIL ANALYSIS REPORT

Sample Rating Trend


**NORMAL**



Machine Id  
**9372**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 10W30 (--- GAL)**

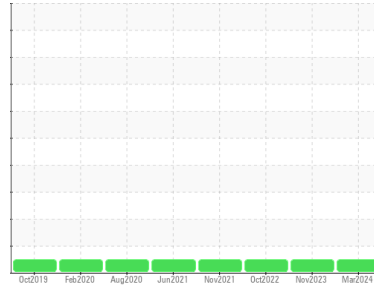

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0853447</b>	WC0853117	WC0738044
Sample Date	Client Info			<b>09 Mar 2024</b>	02 Nov 2023	07 Oct 2022
Machine Age	kms	Client Info		<b>444497</b>	442029	426282
Oil Age	kms	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Changed</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>24</b>	28	22
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>2</b>	4	3
Lead	ppm	ASTM D5185(m)	>40	<b>5</b>	<1	7
Copper	ppm	ASTM D5185(m)	>330	<b>9</b>	4	4
Tin	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	0	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	<b>28</b>	40	28
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)	100	<b>10</b>	1	61
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185(m)	450	<b>688</b>	692	272
Calcium	ppm	ASTM D5185(m)	3000	<b>1477</b>	1227	2011
Phosphorus	ppm	ASTM D5185(m)	1150	<b>693</b>	649	943
Zinc	ppm	ASTM D5185(m)	1350	<b>800</b>	732	1033
Sulfur	ppm	ASTM D5185(m)	4250	<b>2539</b>	2323	3000
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>3</b>	6	5
Sodium	ppm	ASTM D5185(m)		<b>4</b>	3	3
Potassium	ppm	ASTM D5185(m)	>20	<b>3</b>	6	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0.3</b>	0.3	0.3
Nitration	Abs/cm	ASTM D7624*	>20	<b>11.7</b>	12.4	11.2
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>24.6</b>	25.1	24.7



# OIL ANALYSIS REPORT








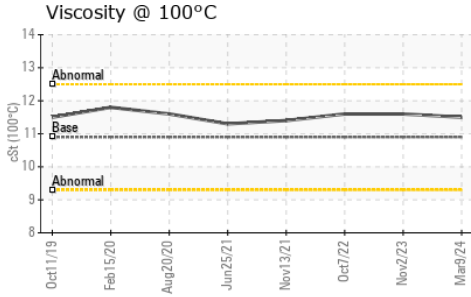


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>19.2</b>	25.0	18.9

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	<b>11.5</b>	11.6	11.6

## GRAPHS

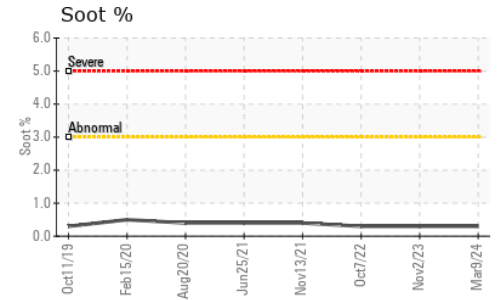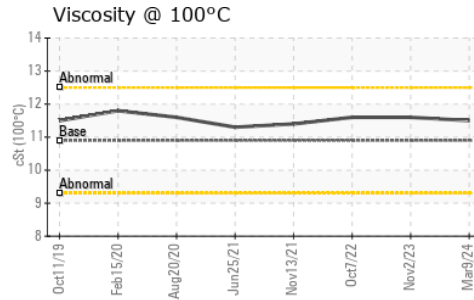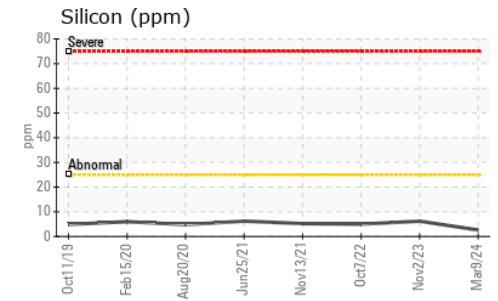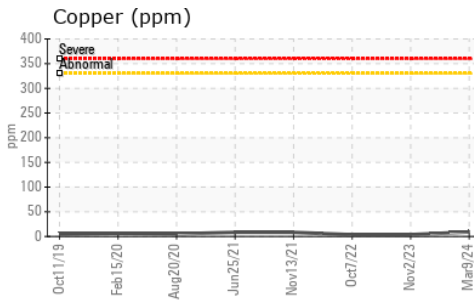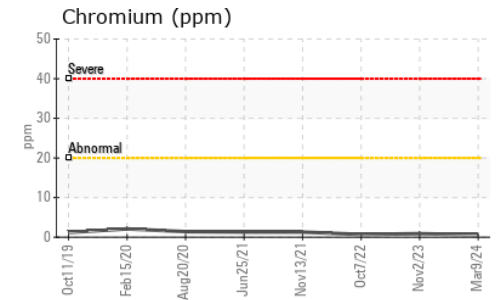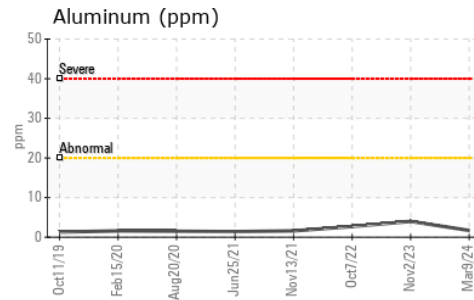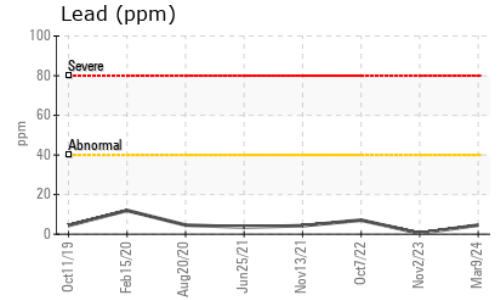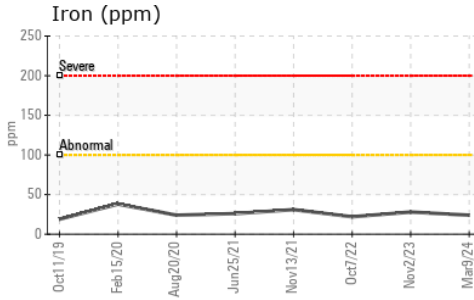

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0853447  
**Lab Number** : **02624536**  
**Unique Number** : 5749655  
**Test Package** : MOB 1  
**Received** : 26 Mar 2024  
**Tested** : 26 Mar 2024  
**Diagnosed** : 26 Mar 2024 - Wes Davis

**Rush Truck Centres**  
 7450 Torbram Rd.  
 Mississauga, ON  
 CA L4T 1G9  
 Contact: Serdar Okur  
 sokur@rushtruckcentres.ca  
 T: (905)671-7600  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.