



OIL ANALYSIS REPORT

Sample Rating Trend



WEAR



Area

Alfa Paper Products - A11300

Machine Id

AM1000-R

Component

Hydraulic System

Fluid

AW HYDRAULIC OIL ISO 46 (--- GAL)

DIAGNOSIS

▲ Recommendation

Viscosity @ 100°C is abnormally low. Viscosity @ 40°C is abnormally low.

● Wear

Iron ppm levels are noted.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Machine ID	Client Info		Laggman Baler	---	---
Department	Client Info		Sales	---	---
Sample From	Client Info		Machine	---	---
Production Stage	Client Info		Lab Reclaim	---	---
Sent to WC	Client Info		03/22/2024	---	---
Sample Number	Client Info		E30001743	---	---
Sample Date	Client Info		19 Mar 2024	---	---
Machine Age	hrs	Client Info	0	---	---
Oil Age	hrs	Client Info	0	---	---
Oil Changed	Client Info		N/A	---	---
Sample Status			ABNORMAL	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >20	● 16	---	---
Chromium	ppm	ASTM D5185(m) >20	<1	---	---
Nickel	ppm	ASTM D5185(m) >20	0	---	---
Titanium	ppm	ASTM D5185(m)	0	---	---
Silver	ppm	ASTM D5185(m)	0	---	---
Aluminum	ppm	ASTM D5185(m) >20	<1	---	---
Lead	ppm	ASTM D5185(m) >20	<1	---	---
Copper	ppm	ASTM D5185(m) >20	9	---	---
Tin	ppm	ASTM D5185(m) >20	0	---	---
Antimony	ppm	ASTM D5185(m)	0	---	---
Vanadium	ppm	ASTM D5185(m)	0	---	---
Beryllium	ppm	ASTM D5185(m)	0	---	---
Cadmium	ppm	ASTM D5185(m)	0	---	---

ADDITIVES


	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 5	<1	---	---
Barium	ppm	ASTM D5185(m) 5	0	---	---
Molybdenum	ppm	ASTM D5185(m) 5	0	---	---
Manganese	ppm	ASTM D5185(m)	0	---	---
Magnesium	ppm	ASTM D5185(m) 25	4	---	---
Calcium	ppm	ASTM D5185(m) 200	15	---	---
Phosphorus	ppm	ASTM D5185(m) 300	247	---	---
Zinc	ppm	ASTM D5185(m) 370	208	---	---
Sulfur	ppm	ASTM D5185(m) 2500	2537	---	---
Lithium	ppm	ASTM D5185(m)	<1	---	---

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >15	2	---	---
Sodium	ppm	ASTM D5185(m)	4	---	---
Potassium	ppm	ASTM D5185(m) >20	<1	---	---
Water	%	ASTM D6304* >0.05	0.003	---	---
ppm Water	ppm	ASTM D6304* >500	30	---	---

OIL ANALYSIS REPORT


▲ Viscosity @ 100°C

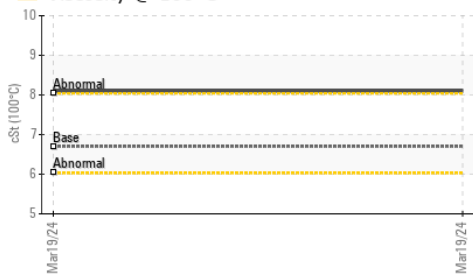


▲ Viscosity @ 40°C

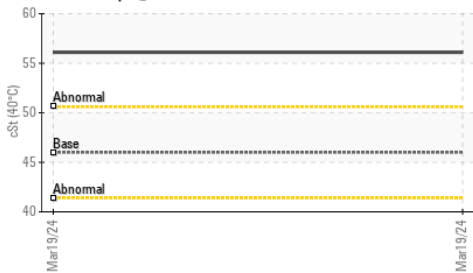


● Ferrous Alloys

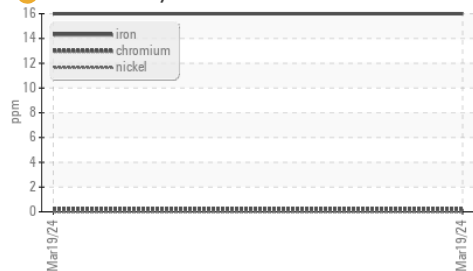

Particle Count

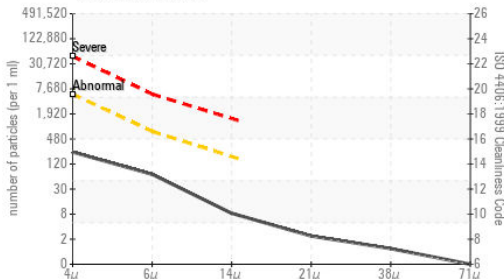

Acid Number

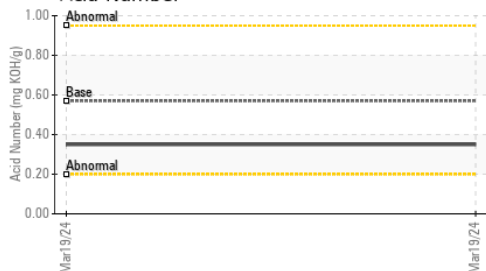

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	205	---	---
Particles >6µm	ASTM D7647	>640	60	---	---
Particles >14µm	ASTM D7647	>160	7	---	---
Particles >21µm	ASTM D7647	>40	2	---	---
Particles >38µm	ASTM D7647	>10	1	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>19/16/14	15/13/10	---	---

FLUID DEGRADATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D974*	0.57	0.35	---	---

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar Visual*	NONE	NONE	---	---
Yellow Metal	scalar Visual*	NONE	NONE	---	---
Precipitate	scalar Visual*	NONE	NONE	---	---
Silt	scalar Visual*	NONE	NONE	---	---
Debris	scalar Visual*	NONE	NONE	---	---
Sand/Dirt	scalar Visual*	NONE	NONE	---	---
Appearance	scalar Visual*	NORML	NORML	---	---
Odor	scalar Visual*	NORML	NORML	---	---
Emulsified Water	scalar Visual*	>0.05	NEG	---	---
Free Water	scalar Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D7279(m)	46	▲ 56.1	---	---
Visc @ 100°C	cSt ASTM D7279(m)	6.7	▲ 8.1	---	---
Viscosity Index (VI)	Scale ASTM D2270*	97	112	---	---

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color			no image	no image
Bottom			no image	no image



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : E30001743
Lab Number : **02624684**
Unique Number : 5749803
Test Package : IND 2 (Additional Tests: KF, KV100, VI)
Received : 26 Mar 2024
Tested : 27 Mar 2024
Diagnosed : 05 Apr 2024 - Tatiana Sorkina

Environmental 360 Solutions Ltd.
 640 Victoria Street
 Cobourg, ON
 CA K9A 5H5
 Contact: Tatiana Sorkina
 tsorkina@e360s.ca
 T: (800)263-3939
 F: (905)373-4950

To discuss this sample report, contact Customer Service at 1-905-372-2251.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.