


OIL ANALYSIS REPORT

Centoco Plastics - C10900

A2403155 Component **Hydraulic System**

AW HYDRAULIC OIL ISO 46 (--- GAL)





Recommendation

We certify that this oil is clean, that the additives are at acceptable levels, and that it is suitable for use.

Wear

Copper and iron ppm levels are noted.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Batch #		Client Info		2024 03 0240		
Department		Client Info		Production		
Sample From		Client Info		Machine		
Production Stage		Client Info		Final		
Sent to WC		Client Info		03/22/2024		
Sample Number		Client Info		E30001744		
Sample Date		Client Info		22 Mar 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		


WEAR METALS		method			history1	history2
Iron	ppm	ASTM D5185(m)	>20	12		
Chromium	ppm	ASTM D5185(m)	>20	0		
Nickel	ppm	ASTM D5185(m)	>20	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>20	<1		
Lead	ppm	ASTM D5185(m)	>20	<1		
Copper	ppm	ASTM D5185(m)	>20	11		
Tin	ppm	ASTM D5185(m)	>20	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	5	<1		
Barium	ppm	ASTM D5185(m)	5	<1		
Molybdenum	ppm	ASTM D5185(m)	5	0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)	25	23		
Calcium	ppm	ASTM D5185(m)	200	57		
Phosphorus	ppm	ASTM D5185(m)	300	407		
Zinc	ppm	ASTM D5185(m)	370	431		
Sulfur	ppm	ASTM D5185(m)	2500	1025		
Lithium	ppm	ASTM D5185(m)		<1		

CONTAMINANTS	5	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	1		
Sodium	ppm	ASTM D5185(m)		1		
Potassium	ppm	ASTM D5185(m)	>20	<1		
Water	%	ASTM D6304*	>0.05	0.002		
ppm Water	ppm	ASTM D6304*	>500	18		



OIL ANALYSIS REPORT

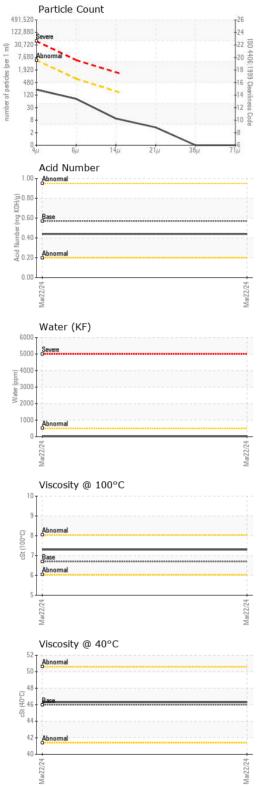

FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	194		
Particles >6µm		ASTM D7647	>640	70		
Particles >14μm		ASTM D7647	>160	8		
Particles >21µm		ASTM D7647	>40	3		
Particles >38µm		ASTM D7647	>10	0		
Particles >71μm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>19/16/14	15/13/10		
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.57	0.44		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Precipitate	scalar	Visual*	NONE	NONE		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORML	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*	>0.05	NEG		
Free Water	scalar	Visual*		NEG		
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46	46.3		
Visc @ 100°C	cSt	ASTM D7279(m)	6.7	7.3		
Viscosity Index (VI)	Scale	ASTM D2270*	97	119		
SAMPLE IMAGES	;	method	limit/base	current	history1	history2
Color					no image	no image
Bottom					no image	no image



CALA ISO 17025:2017 Accredited Laboratory

Laboratory Sample No.

: WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 : E30001744 Lab Number : 02624685

Unique Number : 5749804

Diagnosed Test Package: IND 2 (Additional Tests: KF, KV100, VI)

To discuss this sample report, contact Customer Service at 1-905-372-2251. Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Received

Tested

: 26 Mar 2024

: 27 Mar 2024

: 28 Mar 2024 - Tatiana Sorkina

Environmental 360 Solutions Ltd.

640 Victoria Street Cobourg, ON CA K9A 5H5

Contact: Tatiana Sorkina tsorkina@e360s.ca T: (800)263-3939 F: (905)373-4950

Validity of results and interpretation are based on the sample and information as supplied.