



OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
[S33160]
 Machine Id
Z9BG40144
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0764602	---	---
Sample Date	Client Info	22 Mar 2024	---	---
Machine Age	hrs Client Info	6000	---	---
Oil Age	hrs Client Info	200	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		NORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	---	---
Water	WC Method >0.2	NEG	---	---
Glycol	WC Method	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185(m) >100	3	---	---
Chromium	ppm ASTM D5185(m) >20	0	---	---
Nickel	ppm ASTM D5185(m) >4	0	---	---
Titanium	ppm ASTM D5185(m)	<1	---	---
Silver	ppm ASTM D5185(m) >3	0	---	---
Aluminum	ppm ASTM D5185(m) >20	1	---	---
Lead	ppm ASTM D5185(m) >40	0	---	---
Copper	ppm ASTM D5185(m) >330	0	---	---
Tin	ppm ASTM D5185(m) >15	0	---	---
Antimony	ppm ASTM D5185(m)	16	---	---
Vanadium	ppm ASTM D5185(m)	0	---	---
Beryllium	ppm ASTM D5185(m)	0	---	---
Cadmium	ppm ASTM D5185(m)	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185(m) 250	435	---	---
Barium	ppm ASTM D5185(m) 10	0	---	---
Molybdenum	ppm ASTM D5185(m) 100	94	---	---
Manganese	ppm ASTM D5185(m)	0	---	---
Magnesium	ppm ASTM D5185(m) 450	489	---	---
Calcium	ppm ASTM D5185(m) 3000	1395	---	---
Phosphorus	ppm ASTM D5185(m) 1150	980	---	---
Zinc	ppm ASTM D5185(m) 1350	1123	---	---
Sulfur	ppm ASTM D5185(m) 4250	2700	---	---
Lithium	ppm ASTM D5185(m)	<1	---	---

CONTAMINANTS


method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185(m) >25	8	---	---
Sodium	ppm ASTM D5185(m) >158	1	---	---
Potassium	ppm ASTM D5185(m) >20	<1	---	---

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% ASTM D7844* >3	0	---	---
Nitration	Abs/cm ASTM D7624* >20	4.7	---	---
Sulfation	Abs./1mm ASTM D7415* >30	19.4	---	---



OIL ANALYSIS REPORT








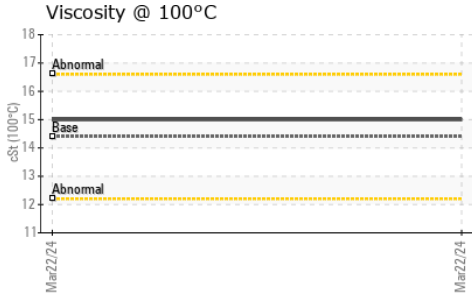


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	12.9	---	---

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	VLITE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Free Water	scalar	Visual*		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	15.0	---	---

GRAPHS

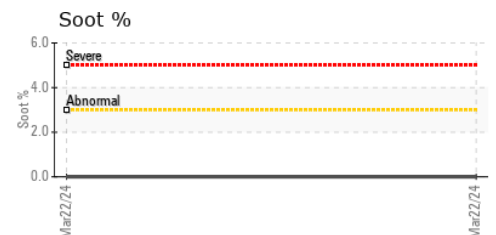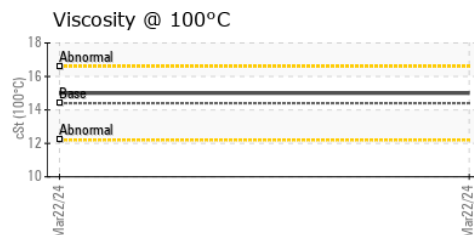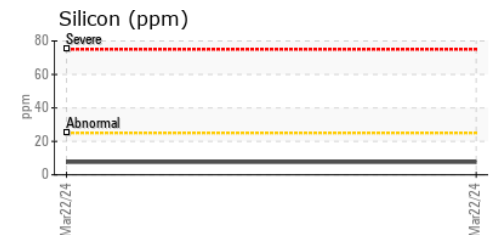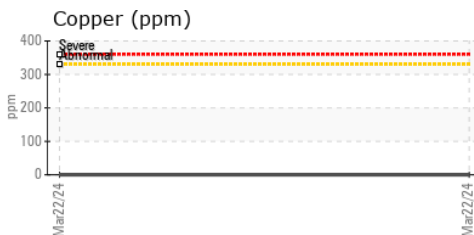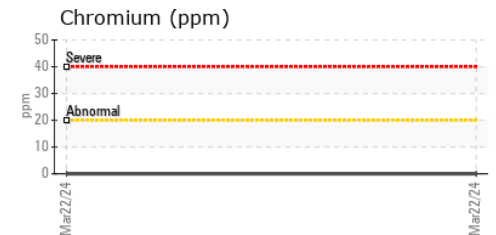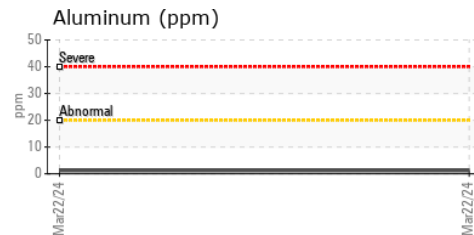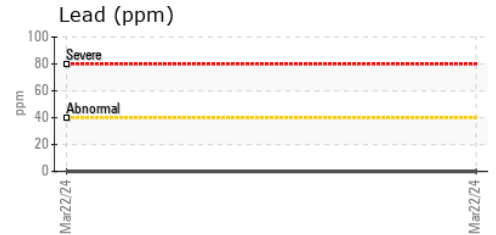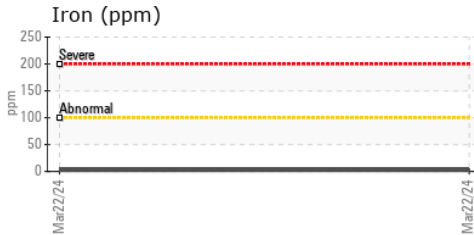

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0764602 **Received** : 27 Mar 2024
Lab Number : **02624853** **Tested** : 27 Mar 2024
Unique Number : 5749972 **Diagnosed** : 27 Mar 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

ROBERTS FARM EQUIPMENT
 014945 COUNTY RD 10, R.R. #1
 CHESLEY, ON
 CA N0G 1L0
 Contact: Chad Roney
 chad@robertsfarm.com
 T: (519)363-3192
 F: (519)363-2673

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.