



Machine Id  
**G2 L2**

Component  
**Hydraulic System**

Fluid  
**ENVIRONMENTAL OIL ISO 22 (--- GAL)**

**DIAGNOSIS**

**Recommendation**

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) ENVIRONMENTAL OIL ISO 22. Please confirm. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

**Wear**

All component wear rates are normal.

**Contamination**

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

**Fluid Condition**

The oil viscosity is higher than typical. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>ST45543</b>	---	---
Sample Date	Client Info			<b>26 Mar 2024</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---






WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---
Lead	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---
Tin	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)		<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	5	<b>&lt;1</b>	---	---
Barium	ppm	ASTM D5185(m)	5	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	5	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)	5	<b>3</b>	---	---
Calcium	ppm	ASTM D5185(m)	15	<b>11</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	1100	<b>384</b>	---	---
Zinc	ppm	ASTM D5185(m)	10	<b>4</b>	---	---
Sulfur	ppm	ASTM D5185(m)	1400	<b>1351</b>	---	---
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	<b>16</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>2</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>5</b>	---	---
Water	%	ASTM D6304*	>0.05	<b>0.016</b>	---	---
ppm Water	ppm	ASTM D6304*	>500	<b>163</b>	---	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>1688</b>	---	---
Particles >6µm		ASTM D7647	>1300	<b>242</b>	---	---
Particles >14µm		ASTM D7647	>160	<b>26</b>	---	---
Particles >21µm		ASTM D7647	>40	<b>12</b>	---	---
Particles >38µm		ASTM D7647	>10	<b>3</b>	---	---
Particles >71µm		ASTM D7647	>3	<b>1</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>18/15/12</b>	---	---

# OIL ANALYSIS REPORT

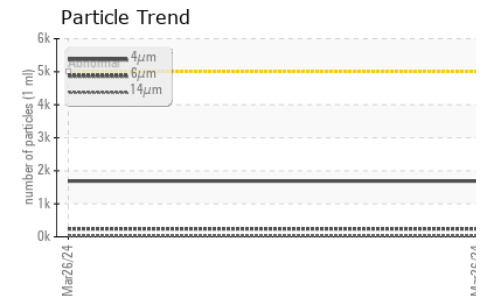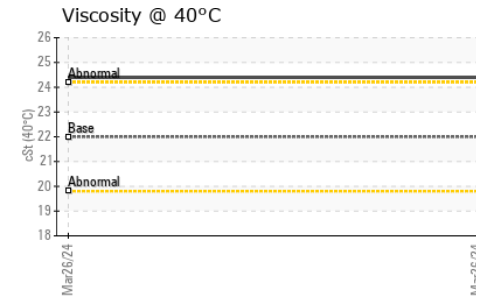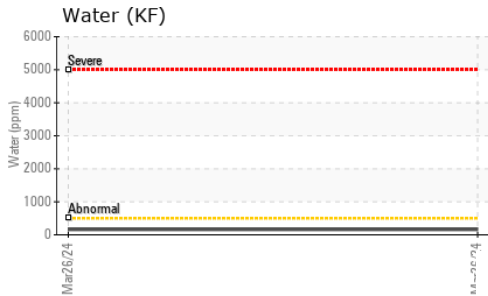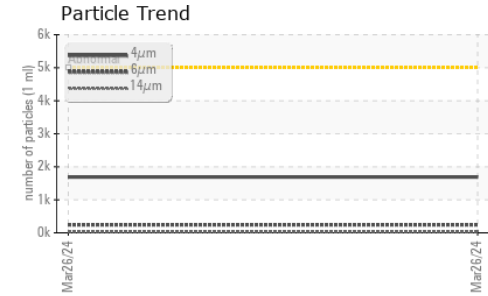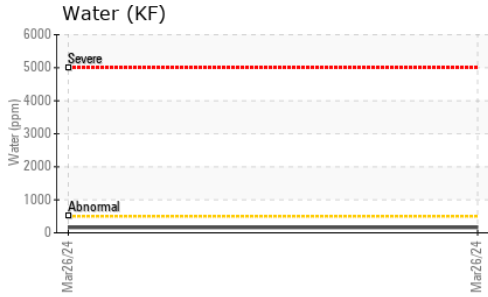

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	1.25	<b>1.14</b>	---	---






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.05	<b>NEG</b>	---	---
Free Water	scalar	Visual*		<b>NEG</b>	---	---

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	22	<b>24.4</b>	---	---

### SAMPLE IMAGES

	method	limit/base	current	history1	history2
Color				<i>no image</i>	<i>no image</i>
Bottom				<i>no image</i>	<i>no image</i>

### GRAPHS

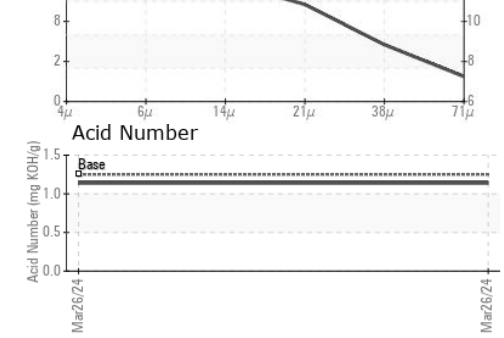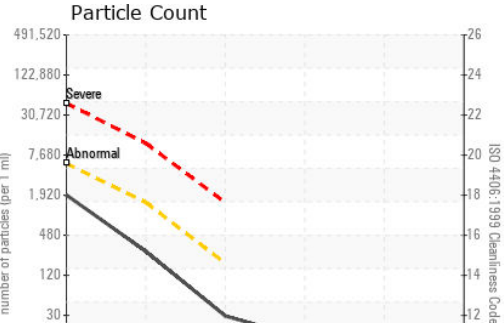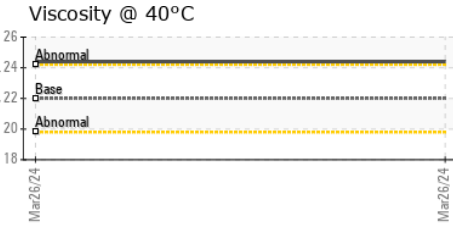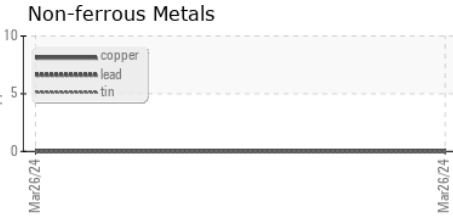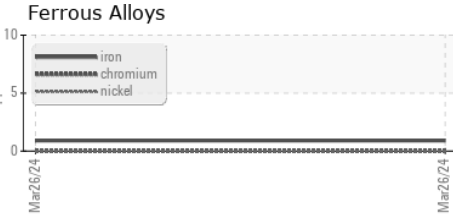

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : ST45543 **Received** : 27 Mar 2024  
**Lab Number** : **02624950** **Tested** : 28 Mar 2024  
**Unique Number** : 5750069 **Diagnosed** : 28 Mar 2024 - Kevin Marson  
**Test Package** : IND 2 ( Additional Tests: KF )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**DIOTTES HYDRAULICS**  
 580 INDUSTRIAL AVE, #2  
 OTTAWA, ON  
 CA K1G 0Y9  
 Contact: Brodie Diotte  
 brodie@diottes.com  
 T: (613)244-4735  
 F: