



FUEL REPORT

Sample Rating Trend

OFF SPEC



Area
PAYEUR LAURIER STATION [603897]
Machine Id
XHH300182

Component
Diesel Fuel
Fluid

No.1 DIESEL FUEL (ULTRALOW SULPHUR) (--- GAL)



DIAGNOSIS

Recommendation

We recommend an early resample to monitor this condition.

Contaminants

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. There is no indication of any contamination in the diesel fuel.

Fuel Condition

90% Distill Point results are abnormally high. Final Boiling Point results are abnormally high. Laboratory tests indicate that this sample does NOT meet specifications for No.1 diesel fuel, ultra-low sulfur.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KT0000814	---	---
Sample Date	Client Info	21 Mar 2024	---	---
Machine Age	hrs Client Info	0	---	---
Sample Status		ABNORMAL	---	---

PHYSICAL PROPERTIES

method	limit/base	current	history1	history2	
Specific Gravity	ASTM D1298*	0.825	0.825	---	---
Fuel Color	text Visual Screen*	Clear	Yellow	---	---
Visc @ 40°C	cSt ASTM D7279(m)	1.8	1.9	---	---
Pensky-Martens Flash Point	°C ASTM D7215*	38	43	---	---

SULFUR CONTENT

method	limit/base	current	history1	history2	
Sulfur	ppm ASTM D5185(m)	10	10	---	---

DISTILLATION

method	limit/base	current	history1	history2	
Initial Boiling Point	°C ASTM D2887*	159	152	---	---
5% Distillation Point	°C ASTM D2887*		171	---	---
10% Distill Point	°C ASTM D2887*	184	178	---	---
15% Distillation Point	°C ASTM D2887*		185	---	---
20% Distill Point	°C ASTM D2887*	196	192	---	---
30% Distill Point	°C ASTM D2887*	205	204	---	---
40% Distill Point	°C ASTM D2887*	216	218	---	---
50% Distill Point	°C ASTM D2887*	227	232	---	---
60% Distill Point	°C ASTM D2887*	238	246	---	---
70% Distill Point	°C ASTM D2887*	251	260	---	---
80% Distill Point	°C ASTM D2887*	264	277	---	---
85% Distillation Point	°C ASTM D2887*		289	---	---
90% Distill Point	°C ASTM D2887*	288	300	---	---
95% Distillation Point	°C ASTM D2887*		319	---	---
Final Boiling Point	°C ASTM D2887*	309	334	---	---

IGNITION QUALITY

method	limit/base	current	history1	history2	
API Gravity	ASTM D1298*	40.1	40	---	---
Cetane Index	ASTM D4737*	<40.0	46	---	---

CONTAMINANTS






method	limit/base	current	history1	history2	
Silicon	ppm ASTM D5185(m)	<1.0	0	---	---
Sodium	ppm ASTM D5185(m)	<0.1	<1	---	---
Potassium	ppm ASTM D5185(m)	<0.1	0	---	---
Water	% ASTM D6304*	<0.05	0.003	---	---
ppm Water	ppm ASTM D6304*	<500	34	---	---

FLUID CLEANLINESS

method	limit/base	current	history1	history2	
Particles >4µm	ASTM D7647	>2500	1602	---	---
Particles >6µm	ASTM D7647	>640	352	---	---
Particles >14µm	ASTM D7647	>80	26	---	---
Particles >21µm	ASTM D7647	>20	7	---	---
Particles >38µm	ASTM D7647	>4	1	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>18/16/13	18/16/12	---	---






FUEL REPORT

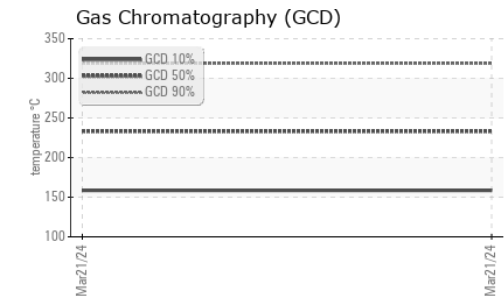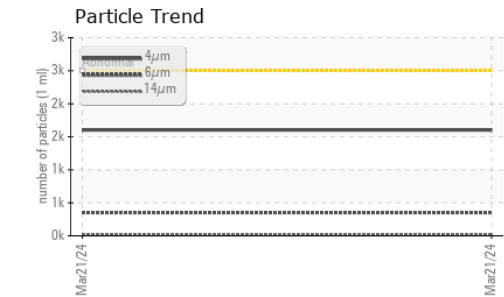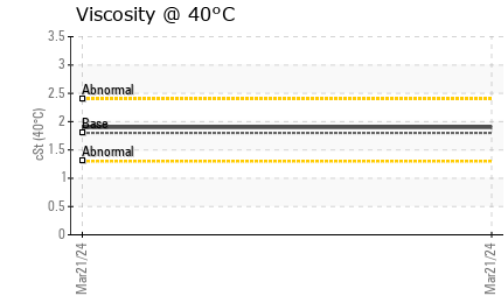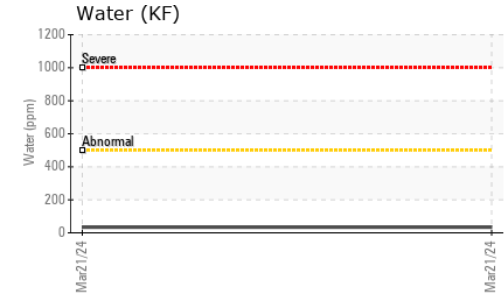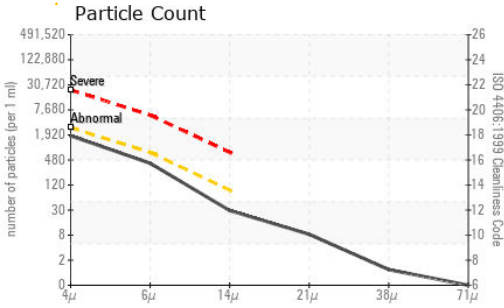

HEAVY METALS	method	limit/base	current	history1	history2	
Aluminum	ppm	ASTM D5185(m)	<0.1	0	---	---
Nickel	ppm	ASTM D5185(m)	<0.1	0	---	---
Lead	ppm	ASTM D5185(m)	<0.1	0	---	---
Vanadium	ppm	ASTM D5185(m)	<0.1	0	---	---
Iron	ppm	ASTM D5185(m)	<0.1	0	---	---
Calcium	ppm	ASTM D5185(m)	<0.1	0	---	---
Magnesium	ppm	ASTM D5185(m)	<0.1	0	---	---
Phosphorus	ppm	ASTM D5185(m)	<0.1	0	---	---
Zinc	ppm	ASTM D5185(m)	<0.1	0	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

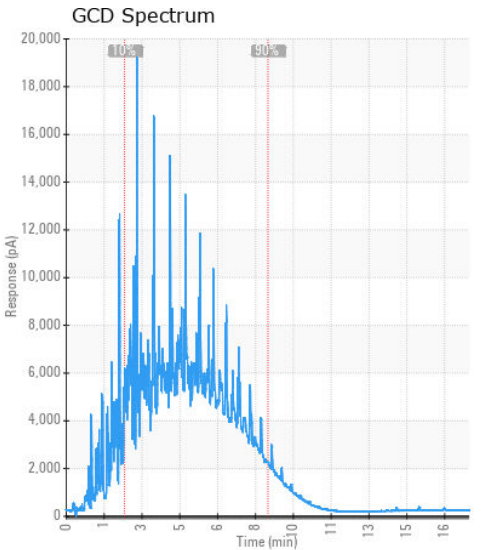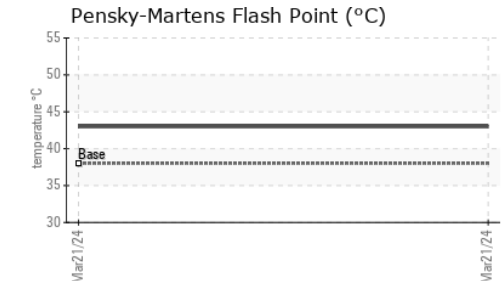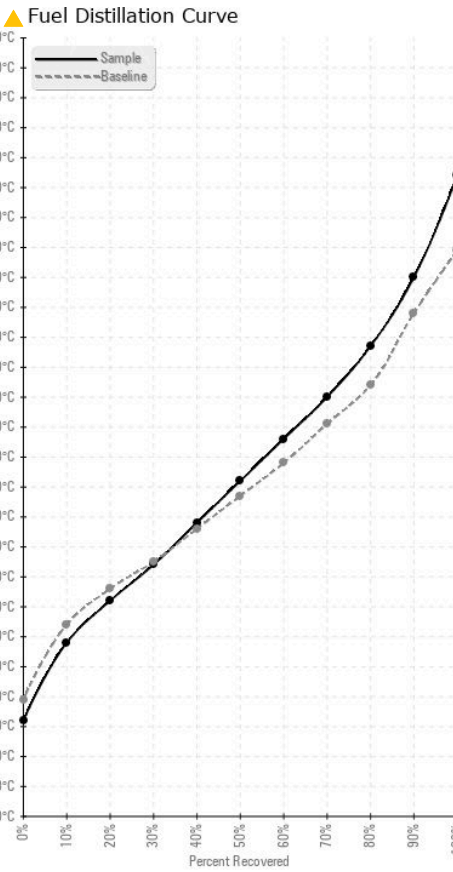

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : KT0000814
Lab Number : 02625082
Unique Number : 5750201
Test Package : FUEL (Additional Tests: CC Flash, GC-PercFuel, PrtCount)

Kioti Tractor Division - Daedong Canada Inc.
 6500 Kitimat Rd.
 Mississauga, ON
 CA L5N 2B8
 Contact: Rick Dawson
 rdawson@kiotitractor.com
 T: (919)374-5100
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.