

FUEL REPORT

Sample Rating Trend


ISO



Area
[6100273825]
Machine Id
WQP-500-S7

Component
Diesel Fuel
Fluid

No.2 DIESEL FUEL (ULTRALOW SULPHUR) (--- GAL)

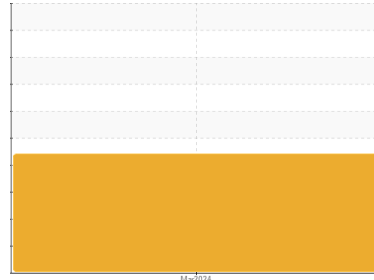

DIAGNOSIS

▲ Recommendation

Vérifier les scelles et/ou les filters pour des points d'entrée des contaminants. Les tests de laboratoire indiquent que ce carburant peut être utilisé et qu'il répond à toutes les exigences. Le reniflard d'air doit être réparé. S'il n'est pas classé, nous vous recommandons de le remplacer par un reniflard à air adapté au micron et / ou au dessicant. Si évalué, nous vous recommandons de réparer / remplacer le reniflard. Nous vous recommandons de filtrer ce fluide avant de l'utiliser. Nous recommandons le remplacement des filtres de ce composant. Échantillonner de nouveau dans 30 à 45 jours afin de contrôler la situation.

▲ Contaminants

Il y a une grande quantité de limon (particules de 4 à 14 microns) dans le carburant. La teneur en eau est négligeable. Le code de propreté du système est beaucoup plus haut que la limite acceptable pour votre objectif de propreté ISO 4406.

Fuel Condition

Tous les essais en laboratoire indiquent que cet échantillon satisfait aux spécifications pour le carburant diesel à ultra-faible teneur de soufre No.2 (US EPA/CGSB-3.517-3 type B). le carburant peut encore servir si la contamination peut être réduite à un niveau acceptable.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WA0020615	---	---
Sample Date	Client Info		22 Mar 2024	---	---
Machine Age	hrs	Client Info	0	---	---
Sample Status			SEVERE	---	---

PHYSICAL PROPERTIES

	method	limit/base	current	history1	history2
Specific Gravity	ASTM D1298*	0.839	0.822	---	---
Fuel Color	text	Visual Screen*	Red	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	2.1	---	---
Pensky-Martens Flash Point	°C	ASTM D7215*	51.3	---	---

SULFUR CONTENT

	method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185(m)	10	---	---

DISTILLATION

	method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D2887*	165	---	---
5% Distillation Point	°C	ASTM D2887*	180	---	---
10% Distill Point	°C	ASTM D2887*	201	---	---
15% Distillation Point	°C	ASTM D2887*	196	---	---
20% Distill Point	°C	ASTM D2887*	216	---	---
30% Distill Point	°C	ASTM D2887*	230	---	---
40% Distill Point	°C	ASTM D2887*	243	---	---
50% Distill Point	°C	ASTM D2887*	255	---	---
60% Distill Point	°C	ASTM D2887*	267	---	---
70% Distill Point	°C	ASTM D2887*	272	---	---
80% Distill Point	°C	ASTM D2887*	287	---	---
85% Distillation Point	°C	ASTM D2887*	297	---	---
90% Distill Point	°C	ASTM D2887*	310	---	---
95% Distillation Point	°C	ASTM D2887*	325	---	---
Final Boiling Point	°C	ASTM D2887*	341	---	---

IGNITION QUALITY

	method	limit/base	current	history1	history2
API Gravity	ASTM D1298*	37.7	40	---	---
Cetane Index	ASTM D4737*	<40.0	51	---	---






CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	<1.0	---	---
Sodium	ppm	ASTM D5185(m)	<0.1	---	---
Potassium	ppm	ASTM D5185(m)	<0.1	---	---
Water	%	ASTM D6304*	<0.05	---	---
ppm Water	ppm	ASTM D6304*	<500	---	---

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>2500	▲ 29338	---	---
Particles >6µm	ASTM D7647	>1300	▲ 10705	---	---
Particles >14µm	ASTM D7647	>160	▲ 454	---	---
Particles >21µm	ASTM D7647	>40	● 69	---	---
Particles >38µm	ASTM D7647	>10	2	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>18/17/14	▲ 22/21/16	---	---




FUEL REPORT

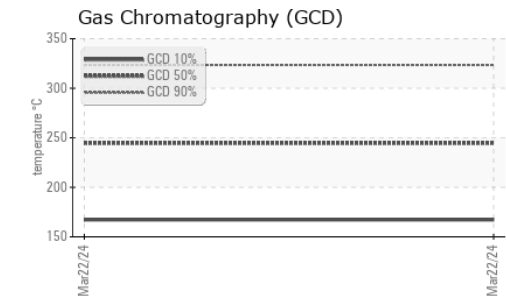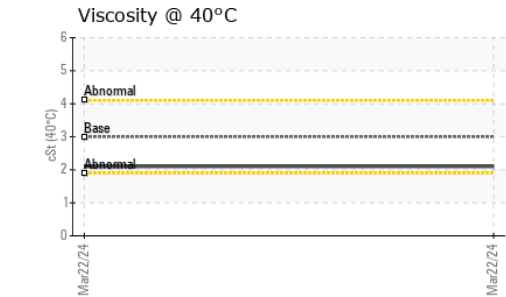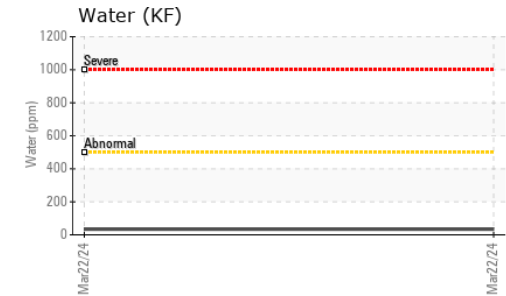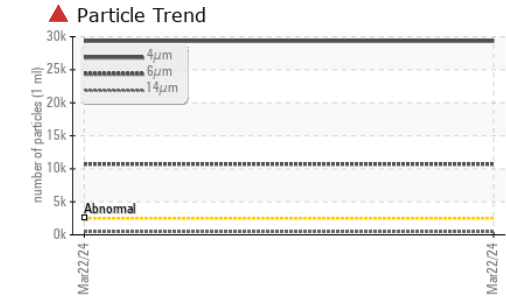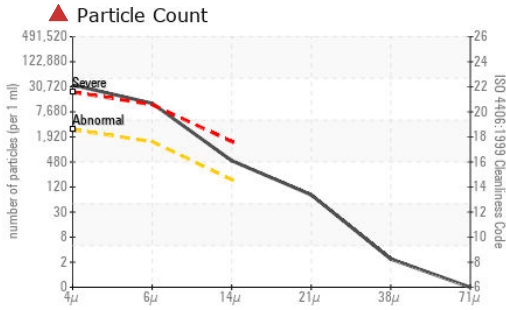

HEAVY METALS		method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185(m)	<0.1	0	---	---
Nickel	ppm	ASTM D5185(m)	<0.1	0	---	---
Lead	ppm	ASTM D5185(m)	<0.1	0	---	---
Vanadium	ppm	ASTM D5185(m)	<0.1	0	---	---
Iron	ppm	ASTM D5185(m)	<0.1	<1	---	---
Calcium	ppm	ASTM D5185(m)	<0.1	0	---	---
Magnesium	ppm	ASTM D5185(m)	<0.1	0	---	---
Phosphorus	ppm	ASTM D5185(m)	<0.1	<1	---	---
Zinc	ppm	ASTM D5185(m)	<0.1	0	---	---

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color				no image	no image	
Bottom				no image	no image	

GRAPHS

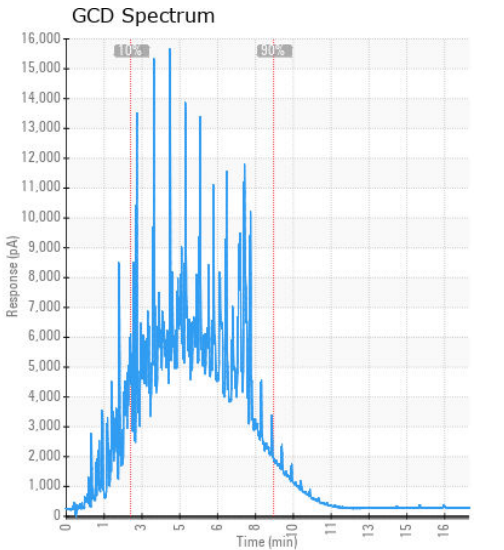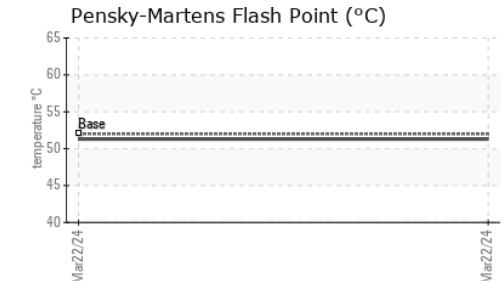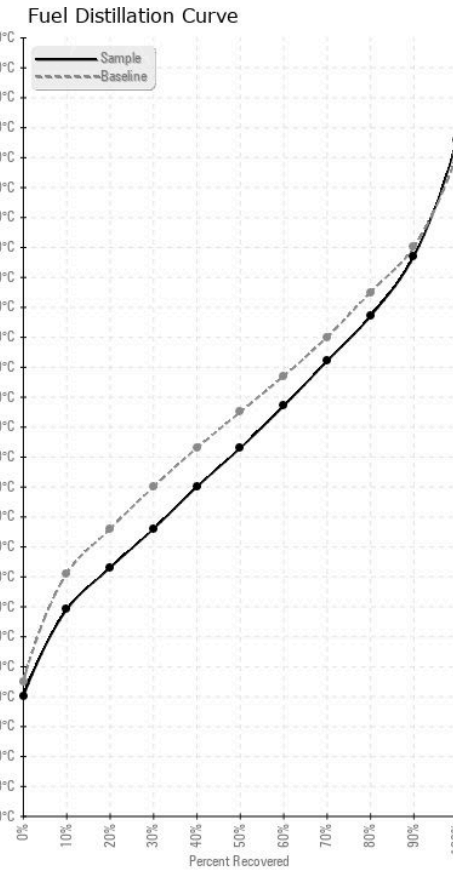

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WA0020615 **Received** : 27 Mar 2024
Lab Number : 02625084 **Tested** : 01 Apr 2024
Unique Number : 5750203 **Diagnosed** : 01 Apr 2024 - Kevin Marson
Test Package : FUEL (Additional Tests: CC Flash, GC-PercFuel, PrtCount)

Generatrice Drummond
 243 rue des ARTISANS
 SAINT-GERMAIN-DE-GRANTHAM, QC
 CA J0C 1K0
 Contact: Valerie Poirier
 poiirivalerie@generatricedrummond.com
 T: (819)398-6811
 F: (819)398-7022

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.