

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

QC230213IND2

Component Hydraulic System Fluid AW HYDRAULIC OIL ISO 68 (--- GAL)

DIAGNOSIS

Recommendation

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

																																-	1
																																	L
																																	L
																																	Ł
																																	L
																																	L
																																	L
																																	L
																																	L
																																	L
																																	Ł
																																	L
																																	L
																																	Ł
																																	L
																																	L
																																	L
																																	L
																																	L
																																	L
																																	Ł
																																	L
																																	L
																																	L
																																	L
																																	L
																																	L
																																	L
																																	L
																																	L
																																	Ł
																																	L
•	-			۰.	۰.		۰.	÷		۰.	۰.	÷.	-		۰.	۰.	÷.	-		۰.	۰.	-		 ۰.	۰.	ė.	-		۰.	÷	-		L




2024 Feb2024 Feb2024 Feb2024 Mar2024 Mar2024 Mar2024 Mar2024

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0912607	WC0912606	WC0912605
Sample Date		Client Info		28 Mar 2024	27 Mar 2024	26 Mar 2024
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	0	0	0
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>20	0	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	0	0	0
Lead	ppm	ASTM D5185(m)	>20	0	0	0
Copper	ppm	ASTM D5185(m)	>20	0	0	0
Tin	ppm	ASTM D5185(m)	>20	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	5	0	0	0
Barium	ppm		5	0	0	0
Molybdenum		. ,		•	0	
	ppm	ASTM D5185(m)	5	0	0	0
Manganese	ppm ppm	ASTM D5185(m) ASTM D5185(m)	5	0	0	0
Manganese	ppm	. ,	25	-		
-	ppm ppm	ASTM D5185(m)		0	0	0
Manganese Magnesium Calcium	ppm ppm ppm	ASTM D5185(m) ASTM D5185(m)	25	0 <1	0 <1	0 <1
Manganese Magnesium	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	25 200	0 <1 42	0 <1 42	0 <1 41
Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	25 200 300	0 <1 42 338	0 <1 42 332	0 <1 41 329
Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	25 200 300 370	0 <1 42 338 421	0 <1 42 332 420	0 <1 41 329 420
Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	25 200 300 370	0 <1 42 338 421 681	0 <1 42 332 420 667	0 <1 41 329 420 671
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	25 200 300 370 2500 limit/base	0 <1 42 338 421 681 <1	0 <1 42 332 420 667 <1	0 <1 41 329 420 671 <1
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS	ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	25 200 300 370 2500 limit/base >15	0 <1 42 338 421 681 <1 current	0 <1 42 332 420 667 <1 history1	0 <1 41 329 420 671 <1 history2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon	ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) method ASTM D5185(m)	25 200 300 370 2500 limit/base >15	0 <1 42 338 421 681 <1 current 0	0 <1 42 332 420 667 <1 history1 0	0 <1 41 329 420 671 <1 history2 0
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	25 200 300 370 2500 limit/base >15	0 <1 42 338 421 681 <1 current 0 0	0 <1 42 332 420 667 <1 history1 0 0	0 <1 41 329 420 671 <1 history2 0 0
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m) ASTM D5185(m)	25 200 300 370 2500 limit/base >15 >20	0 <1 42 338 421 681 <1 current 0 0 <1	0 <1 42 332 420 667 <1 history1 0 0 0	0 <1 41 329 420 671 <1 <1 history2 0 0 <1
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium Water	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5185(m)	25 200 300 370 2500 limit/base >15 >20 >0.05	0 <1 42 338 421 681 <1 current 0 0 <1 0.002	0 <1 42 332 420 667 <1 history1 0 0 0 0 0 0 0.002	0 <1 41 329 420 671 <1 history2 0 0 0 <1 0.001
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium Water ppm Water	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D6304*	25 200 300 370 2500 limit/base >15 >20 >0.05 >500	0 <1 42 338 421 681 <1 current 0 0 <1 0.002 23	0 <1 42 332 420 667 <1 history1 0 0 0 0 0 0 0 23	0 <1 41 329 420 671 <1 history2 0 0 0 <1 0.001 15
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D6304* ASTM D6304*	25 200 300 370 2500 limit/base >15 >20 >0.05 >500 limit/base	0 <1 42 338 421 681 <1 current 0 0 0 <1 0.002 23 current	0 <1 42 332 420 667 <1 history1 0 0 0 0 0 0 0 0 0 23 history1	0 <1 41 329 420 671 <1 history2 0 0 0 <1 0.001 15 history2
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D6304* ASTM D6304* ASTM D6304*	25 200 300 370 2500 Iimit/base >15 >20 >0.05 >500 Iimit/base >5000	0 <1 42 338 421 681 <1 current 0 0 0 <1 0.002 23 current 106	0 <1 42 332 420 667 <1 history1 0 0 0 0 0 0 0 0 0 0 0 23 history1 142	0 <1 41 329 420 671 <1 history2 0 0 0 <1 0.001 15 history2 175
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium Water Potassium Water Ppm Water FLUID CLEANLIN Particles >4µm Particles >6µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D6304* ASTM D6304* ASTM D6304* ASTM D7647 ASTM D7647	25 200 300 370 2500 imit/base >15 >20 >0.05 >500 imit/base >5000 >1300 >160	0 <1 42 338 421 681 <1 current 0 0 0 <1 0.002 23 current 106 44	0 <1 42 332 420 667 <1 history1 0 0 0 0 0 0 0 0 0 0 0 23 history1 142 79	0 <1 41 329 420 671 <1 history2 0 0 0 <1 0.001 15 history2 175 59
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4μm Particles >14μm	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D6304* ASTM D6304* ASTM D7647 ASTM D7647 ASTM D7647	25 200 300 370 2500 imit/base >15 >20 >0.05 >500 imit/base >5000 >1300 >160	0 <1 42 338 421 681 <1 current 0 0 <1 0.002 23 current 106 44 11	0 <1 42 332 420 667 <1 history1 0 0 0 0 0 0 0 0 0 0 0 2 3 history1 142 79 16	0 <1 41 329 420 671 <1 history2 0 0 0 <1 0.001 15 history2 175 59 12
Manganese Magnesium Calcium Phosphorus Zinc Sulfur Lithium CONTAMINANTS Silicon Sodium Potassium Water ppm Water FLUID CLEANLIN Particles >4µm Particles >14µm Particles >21µm	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185(m) ASTM D5304* ASTM D6304* ASTM D6304* ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	25 200 300 370 2500 limit/base >15 >20 >0.05 >500 limit/base >5000 >1300 >160 >40	0 <1 42 338 421 681 <1 current 0 0 <1 0.002 23 current 106 44 11 4	0 <1 42 332 420 667 <1 history1 0 0 0 0 0 0 0 0 0 0 0 23 history1 142 79 16 5	0 <1 41 329 420 671 <1 history2 0 0 0 <1 0.001 15 history2 175 59 12 4




OIL ANALYSIS REPORT

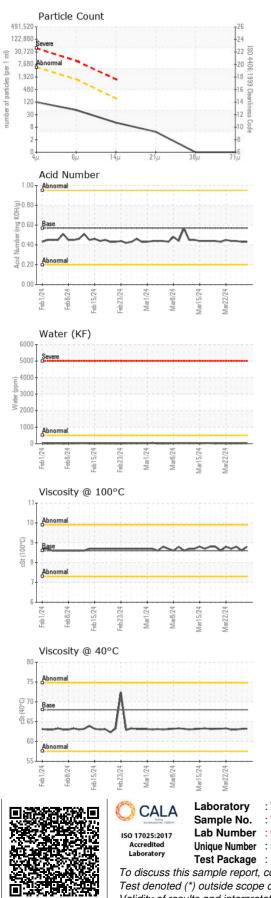

FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.57	0.43	0.43	0.44
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Precipitate	scalar	Visual*	NONE	NONE	NONE	NONE
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	VLITE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	68	63.2	63.2	63.0
Visc @ 100°C	cSt	ASTM D7279(m)	8.6	8.8	8.6	8.8
Viscosity Index (VI)	Scale	ASTM D2270*	96	113	107	113
SAMPLE IMAGES	\$	method	limit/base	current	history1	history2

Color

Bottom



		•	: WearCheck - C8-117 : WC0912607	75 Appleby Line, E Received	Burlington, ON L7L 5H9 : 28 Mar 2024	WearCheck Quality Control Sample Results
	ISO 17025:2017	Lab Number	: 02625212	Tested	: 01 Apr 2024	Burlington, ON
	Accredited	Unique Number	: 5750331	Diagnosed	: 01 Apr 2024 - Wes Davis	S CA
	Laboratory	Test Package	: IND 2 (Additional Te	ests: KF, KV100, V	1)	Contact: Dorian Anderson
	To discuss this	sample report,	contact Customer Ser	vice at 1-800-268-	2131.	dorian.anderson@wearcheck.com
	Test denoted (*) outside scope	T: (289)291-4652			
1-#-7-19-724KETK J	Validity of resu	its and interpret	F: (905)569-8605			