




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

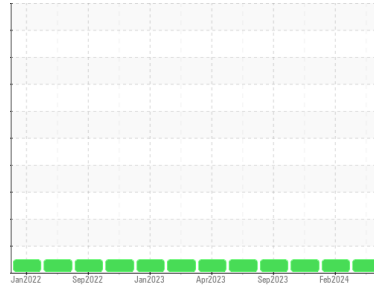

Area  
**[0312-2024-1287]**  
 Machine Id  
**2103**  
 Component  
**Diesel Engine**  
 Fluid  
**VALVOLINE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0891769</b>	WC0891763	WC0858054
Sample Date	Client Info			<b>22 Mar 2024</b>	15 Feb 2024	15 Oct 2023
Machine Age	hrs	Client Info		<b>280566</b>	271304	243707
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Changed</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>75	<b>5</b>	5	5
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>15	<b>&lt;1</b>	1	<1
Lead	ppm	ASTM D5185(m)	>25	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m)	>100	<b>&lt;1</b>	<1	1
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	39	<b>9</b>	9	10
Barium	ppm	ASTM D5185(m)	1	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)	49	<b>6</b>	7	9
Manganese	ppm	ASTM D5185(m)	1	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	616	<b>52</b>	47	32
Calcium	ppm	ASTM D5185(m)	1554	<b>2181</b>	2213	2295
Phosphorus	ppm	ASTM D5185(m)	899	<b>842</b>	860	880
Zinc	ppm	ASTM D5185(m)	1069	<b>976</b>	986	1028
Sulfur	ppm	ASTM D5185(m)	2624	<b>2861</b>	3109	2986
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>6</b>	2	3
Sodium	ppm	ASTM D5185(m)		<b>1</b>	<1	2
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>6	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.2</b>	7.3	7.6
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>18.1</b>	18.5	19.1



# OIL ANALYSIS REPORT

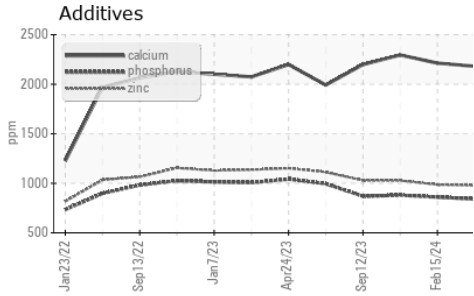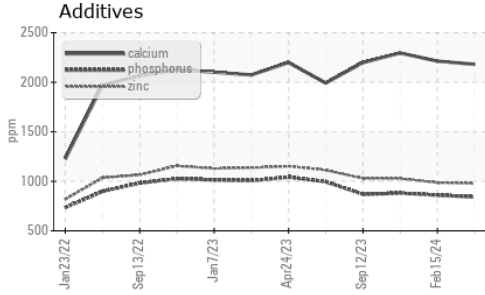

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Abs./1mm	ASTM D7414*	>25	11.2	12.6









### VISUAL

method	limit/base	current	history1	history2
scalar	Visual*	>0.2	NEG	NEG
scalar	Visual*	NEG	NEG	NEG

### FLUID PROPERTIES

method	limit/base	current	history1	history2
cSt	ASTM D7279(m)	13.6	12.9	13.4

### GRAPHS

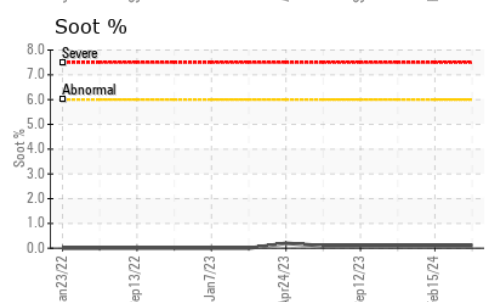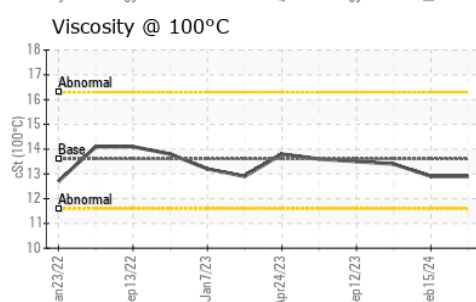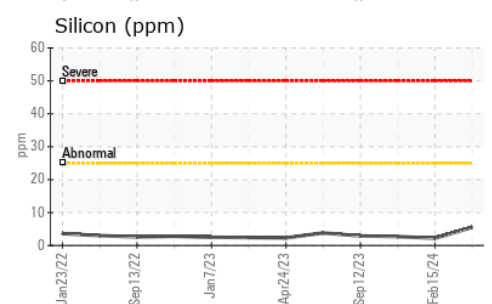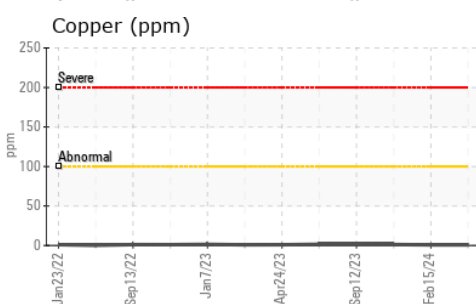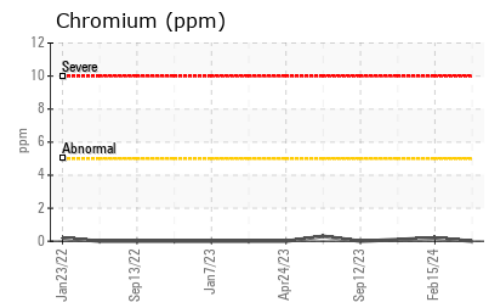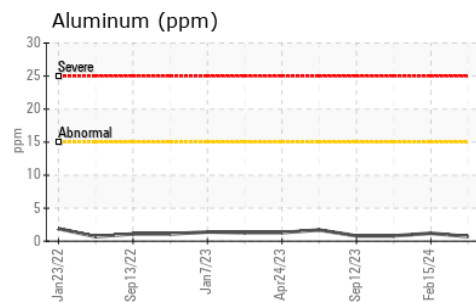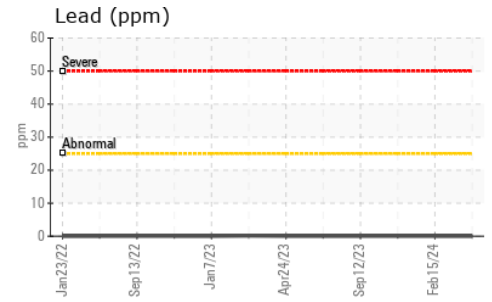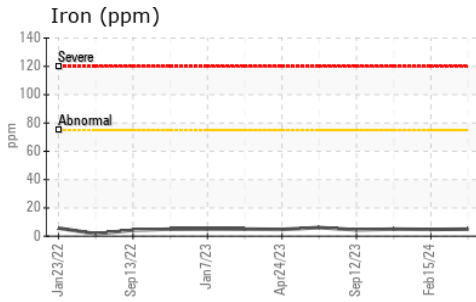

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0891769  
**Lab Number** : 02625565  
**Unique Number** : 5750684  
**Test Package** : MOB 1  
**Received** : 01 Apr 2024  
**Tested** : 01 Apr 2024  
**Diagnosed** : 01 Apr 2024 - Wes Davis

**MVT Canadian Bus**  
 133 Welham Road  
 Barrie, ON  
 CA L4N 8Y3  
 Contact: Frank Mastromarco  
 frank.mastromarco@mvttransit.com  
 T: (709)792-5033  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.