




# OIL ANALYSIS REPORT

Sample Rating Trend

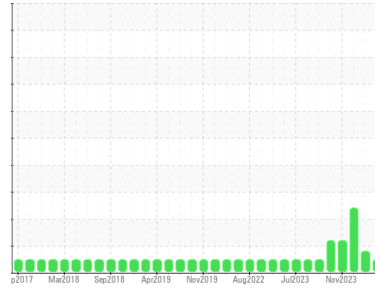

**NORMAL**



Area  
**[1131]**  
 Machine Id  
**NOVA BUS 1705**

Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0891758</b>	WC0891784	WC0875074
Sample Date	Client Info			<b>15 Mar 2024</b>	09 Feb 2024	27 Dec 2023
Machine Age	kms	Client Info		<b>578904</b>	569470	561801
Oil Age	kms	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>Changed</b>	N/A	Changed
Sample Status				<b>NORMAL</b>	MARGINAL	SEVERE

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	▲ 3	▲ 9.4
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>100	<b>8</b>	3	22
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	0	1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	2
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m)	>330	<b>4</b>	<1	5
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	250	<b>9</b>	11	10
Barium	ppm	ASTM D5185(m)	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	100	<b>6</b>	6	8
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	450	<b>50</b>	45	49
Calcium	ppm	ASTM D5185(m)	3000	<b>2276</b>	2092	2004
Phosphorus	ppm	ASTM D5185(m)	1150	<b>850</b>	824	765
Zinc	ppm	ASTM D5185(m)	1350	<b>1007</b>	916	920
Sulfur	ppm	ASTM D5185(m)	4250	<b>2827</b>	2998	2773
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>2</b>	2	4
Sodium	ppm	ASTM D5185(m)	>158	<b>&lt;1</b>	<1	2
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	1	1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	ASTM D7844*	>3	<b>0.1</b>	0	0.2
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.5</b>	6.3	9.1
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>19.4</b>	16.7	22.1



# OIL ANALYSIS REPORT








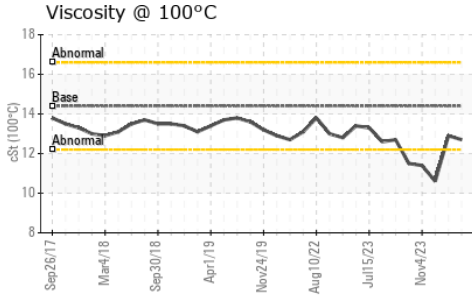


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>12.3</b>	10.0	17.8

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	14.4	<b>12.7</b>	12.9	▲ 10.6

## GRAPHS

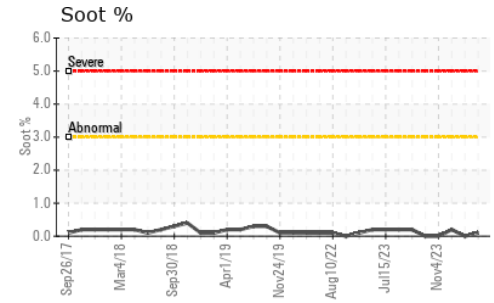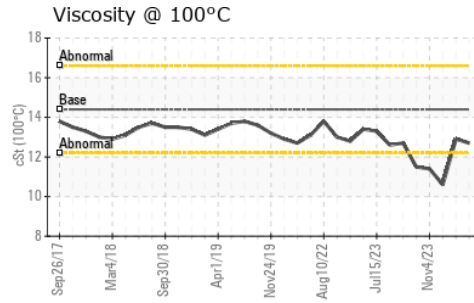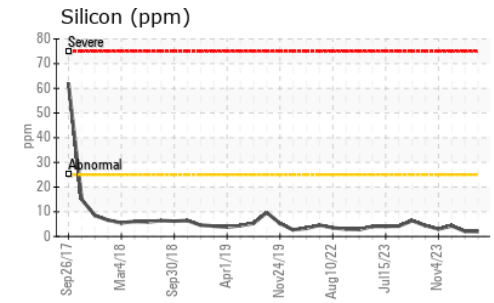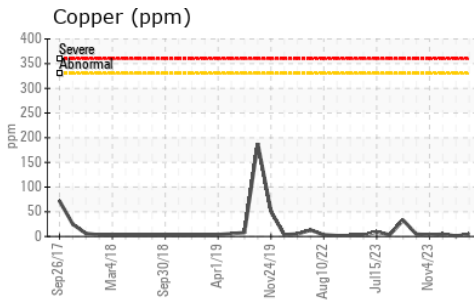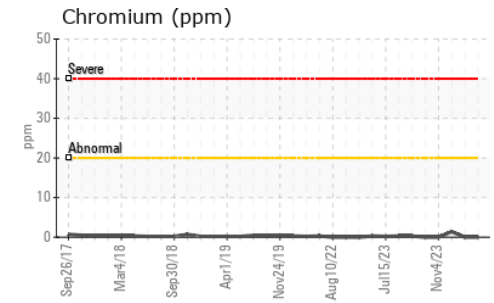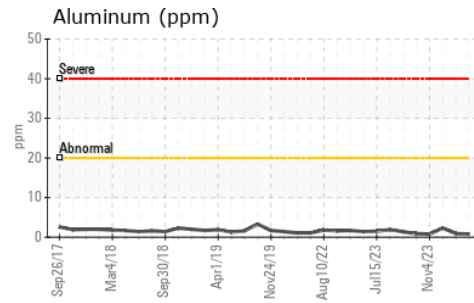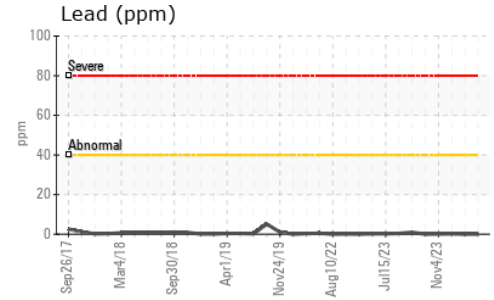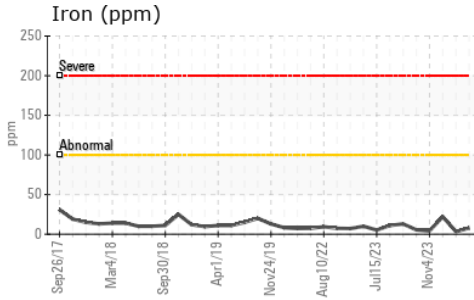

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0891758 **Received** : 01 Apr 2024  
**Lab Number** : **02625573** **Tested** : 01 Apr 2024  
**Unique Number** : 5750692 **Diagnosed** : 01 Apr 2024 - Wes Davis  
**Test Package** : MOB 1

**MVT Canadian Bus**  
 133 Welham Road  
 Barrie, ON  
 CA L4N 8Y3  
 Contact: Frank Mastromarco  
 frank.mastromarco@mvttransit.com  
 T: (709)792-5033  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.