




OIL ANALYSIS REPORT

Sample Rating Trend

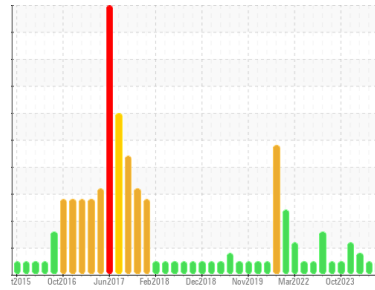

NORMAL



Area
[867]
 Machine Id
NEW FLYER 1303
 Component
Diesel Engine
 Fluid
VALVOLINE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0891795	WC0891787	WC0875097
Sample Date	Client Info		26 Feb 2024	24 Jan 2024	09 Dec 2023
Machine Age	kms	Client Info	357308	398705	339897
Oil Age	kms	Client Info	0	0	0
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	MARGINAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	▲ 2.3
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>100	18	21	18
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	<1	2	1
Lead	ppm	ASTM D5185(m)	>40	0	<1	1
Copper	ppm	ASTM D5185(m)	>330	2	9	36
Tin	ppm	ASTM D5185(m)	>15	0	0	0
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	39	8	6	11
Barium	ppm	ASTM D5185(m)	1	0	0	<1
Molybdenum	ppm	ASTM D5185(m)	49	7	7	10
Manganese	ppm	ASTM D5185(m)	1	0	0	0
Magnesium	ppm	ASTM D5185(m)	616	49	45	57
Calcium	ppm	ASTM D5185(m)	1554	2180	2154	2172
Phosphorus	ppm	ASTM D5185(m)	899	827	850	848
Zinc	ppm	ASTM D5185(m)	1069	969	977	985
Sulfur	ppm	ASTM D5185(m)	2624	2791	2988	2847
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	4	5	6
Sodium	ppm	ASTM D5185(m)		4	6	4
Potassium	ppm	ASTM D5185(m)	>20	7	7	6
Glycol	%	ASTM D7922*		0.0	0.0	0.0


INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	0.7	0.7	0.5
Nitration	Abs/cm	ASTM D7624*	>20	8.3	8.1	7.6
Sulfation	Abs./1mm	ASTM D7415*	>30	20.2	20.6	18.9




OIL ANALYSIS REPORT


Glycol Contamination

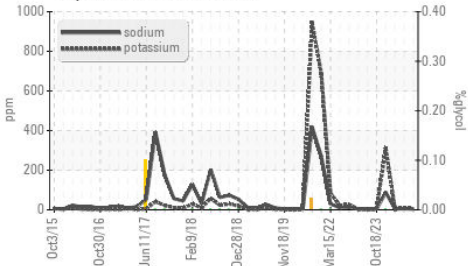

Additives

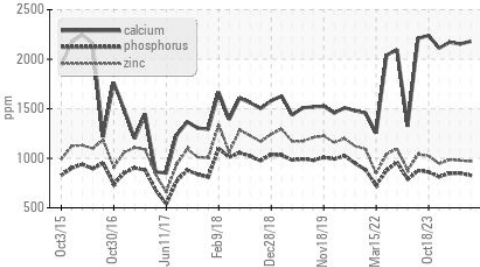

Additives

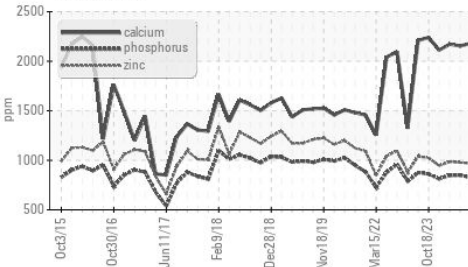

FLUID DEGRADATION

method	limit/base	current	history1	history2
Abs./1mm	ASTM D7414*	>25	12.7	11.6

VISUAL

method	limit/base	current	history1	history2
scalar	Visual*	>0.2	NEG	NEG


method	limit/base	current	history1	history2
scalar	Visual*	NEG	NEG	NEG

FLUID PROPERTIES


method	limit/base	current	history1	history2
cSt	ASTM D7279(m)	13.6	12.7	12.8

GRAPHS


Iron (ppm)

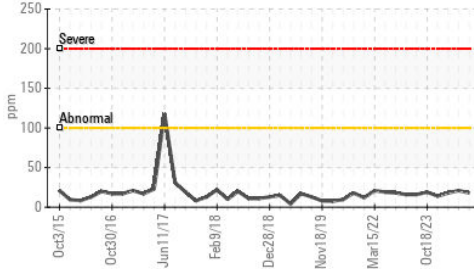


Lead (ppm)

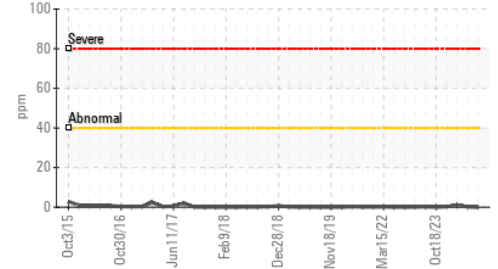


Aluminum (ppm)

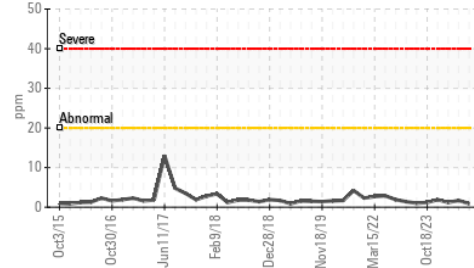


Chromium (ppm)

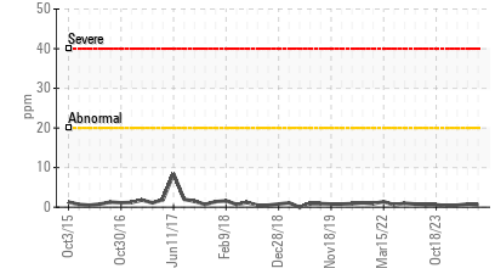


Copper (ppm)

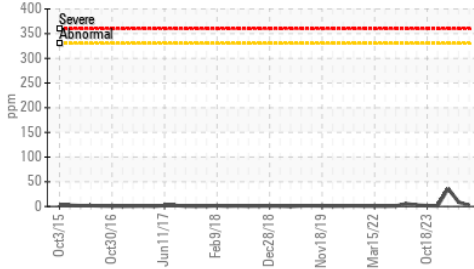


Silicon (ppm)

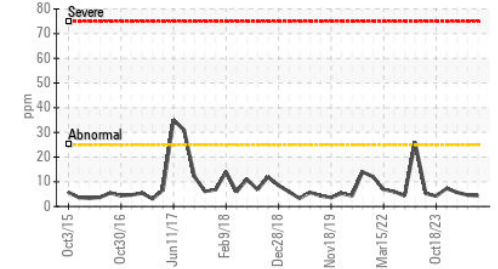

Viscosity @ 100°C

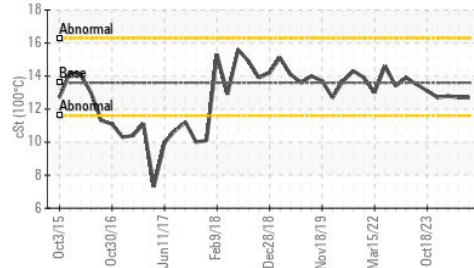

Soot %

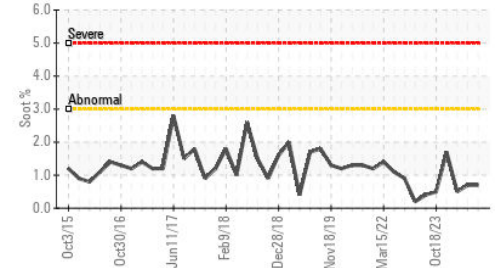

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0891795
Lab Number : 02625574
Unique Number : 5750693
Test Package : MOB 1 (Additional Tests: Glycol)

Received : 01 Apr 2024
Tested : 01 Apr 2024
Diagnosed : 01 Apr 2024 - Wes Davis

MVT Canadian Bus
 133 Welham Road
 Barrie, ON
 CA L4N 8Y3

Contact: Frank Mastromarco
 frank.mastromarco@mvttransit.com

T: (709)792-5033

F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.