



OIL ANALYSIS REPORT

Sample Rating Trend

WATER



Machine Id
HONDA 1HGYZF83PA800165
 Component
Gasoline Engine
 Fluid
HONDA 0W20 (--- GAL)



DIAGNOSIS

Recommendation

We advise that you check for the source of water entry. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is a moderate concentration of water present in the oil. Free water present. Test for glycol is negative.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Viscosity of sample indicates oil is within SAE 30 range, advise investigate. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0779576	---	---
Sample Date	Client Info		26 Mar 2024	---	---
Machine Age	kms	Client Info	13722	---	---
Oil Age	kms	Client Info	0	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			ABNORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>150	37	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>5	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>2	0	---	---
Aluminum	ppm	ASTM D5185(m)	>40	16	---	---
Lead	ppm	ASTM D5185(m)	>50	<1	---	---
Copper	ppm	ASTM D5185(m)	>155	38	---	---
Tin	ppm	ASTM D5185(m)	>10	<1	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)		109	---	---
Barium	ppm	ASTM D5185(m)		2	---	---
Molybdenum	ppm	ASTM D5185(m)		624	---	---
Manganese	ppm	ASTM D5185(m)		5	---	---
Magnesium	ppm	ASTM D5185(m)		13	---	---
Calcium	ppm	ASTM D5185(m)		1685	---	---
Phosphorus	ppm	ASTM D5185(m)		605	---	---
Zinc	ppm	ASTM D5185(m)		700	---	---
Sulfur	ppm	ASTM D5185(m)		2070	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS





	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>30	205	---	---
Sodium	ppm	ASTM D5185(m)	>400	11	---	---
Potassium	ppm	ASTM D5185(m)	>20	16	---	---
Glycol	%	ASTM D7922*		0.0	---	---

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*		0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	12.0	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	24.8	---	---



OIL ANALYSIS REPORT





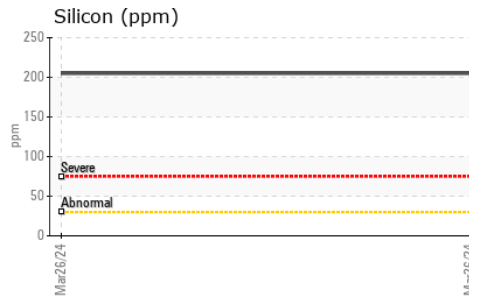
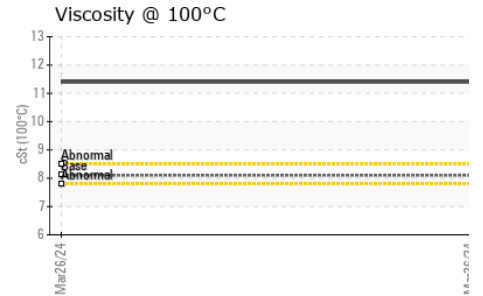
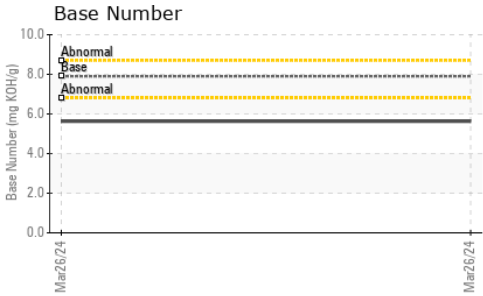
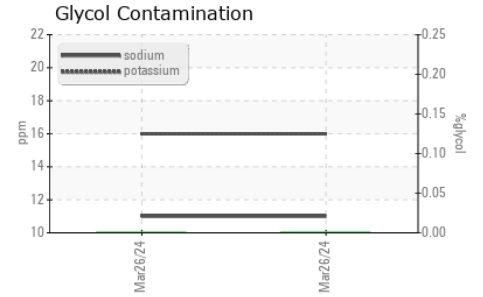


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	21.1	---
Base Number (BN)	mg KOH/g	ASTM D2896*	7.90	5.63	---

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	VLITE	---
Silt	scalar	Visual*	NONE	NONE	---
Debris	scalar	Visual*	NONE	VLITE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	▲.5%	---
Free Water	scalar	Visual*		▲1%	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	8.101	11.4	---

GRAPHS

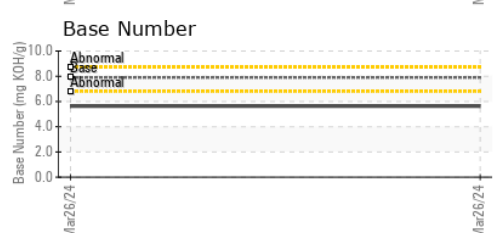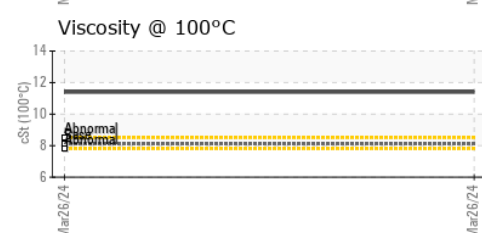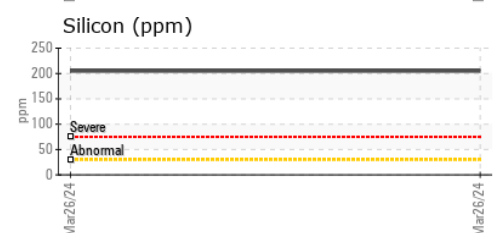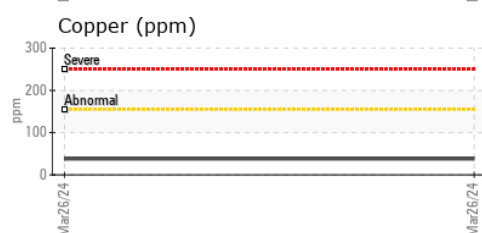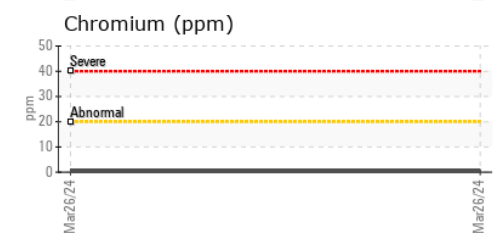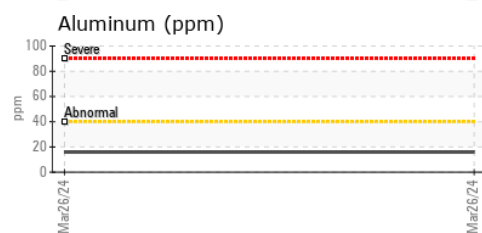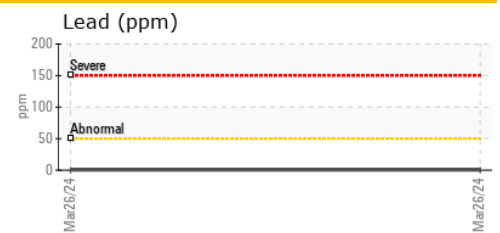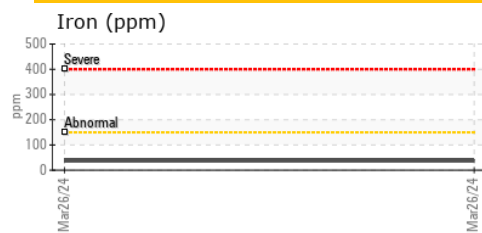

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0779576 **Received** : 01 Apr 2024
Lab Number : 02625673 **Tested** : 01 Apr 2024
Unique Number : 5750792 **Diagnosed** : 02 Apr 2024 - Kevin Marson
Test Package : MOB 2 (Additional Tests: Glycol)

HONDA CANADA INC.
 180 HONDA BLVD
 MARKHAM, ON
 CA L6C 0H9
 Contact: Allen Rosero
 allen_rosero@ch.honda.com
 T:
 F: (416)287-4500

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.