

## 63 STEAM GENERATING & DIS **PB** ID Fan Cleaning Compressor Component

**Air Compressor** 

### SULLAIR SULLUBE (15 LTR)

#### Recommendation

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

The water content is negligible. There is no indication of any contamination in the oil.

#### Fluid Condition

Additive levels indicate the addition of a different brand, or type of oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


DISTRIBUT Sor (S/N 632 SAMPLE INFORM Sample Number Sample Date Machine Age Oil Age	902)	method Client Info Client Info Client Info Client Info	limit/base	Mar2024 Current WC 21 Mar 2024 0 0	history1	history2
Oil Changed	1110	Client Info		N/A		
Sample Status				ATTENTION		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184*		0		
Iron	ppm	ASTM D5185(m)	>50	5		
Chromium	ppm	ASTM D5185(m)	>4	0		
Nickel	ppm	ASTM D5185(m)	>4	0		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)		0		
Aluminum	ppm	ASTM D5185(m)	>10	2		
Lead	ppm	ASTM D5185(m)	>20	0		
Copper	ppm	ASTM D5185(m)	>40	4		
Tin	ppm	ASTM D5185(m)	>5	0		
Antimony	ppm	ASTM D5185(m)		0		
Vanadium	ppm	ASTM D5185(m)		0		
Beryllium	ppm	ASTM D5185(m)		0		
Cadmium	ppm	ASTM D5185(m)		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	12	<1		
Barium	ppm	ASTM D5185(m)	500	<u> </u>		
Molybdenum	ppm	ASTM D5185(m)	0.0	0		
Manganese	ppm	ASTM D5185(m)		0		
Magnesium	ppm	ASTM D5185(m)	0.0	3		
Calcium	ppm	ASTM D5185(m)		2		
Phosphorus	ppm	ASTM D5185(m)	4.0	0		
Zinc	ppm	ASTM D5185(m)	0.1	<u> </u>		
Sulfur	ppm	ASTM D5185(m)	240	288		
Lithium	ppm	ASTM D5185(m)		<1		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<1		
Sodium	ppm	ASTM D5185(m)		179		
Potassium	ppm	ASTM D5185(m)	>20	37		
Water	%	ASTM D6304*	>0.6	0.097		
ppm Water	ppm	ASTM D6304*	>6000	980		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*	0.06	0.64		

Sample Rating Trend

**ADDITIVES** 



# **OIL ANALYSIS REPORT**

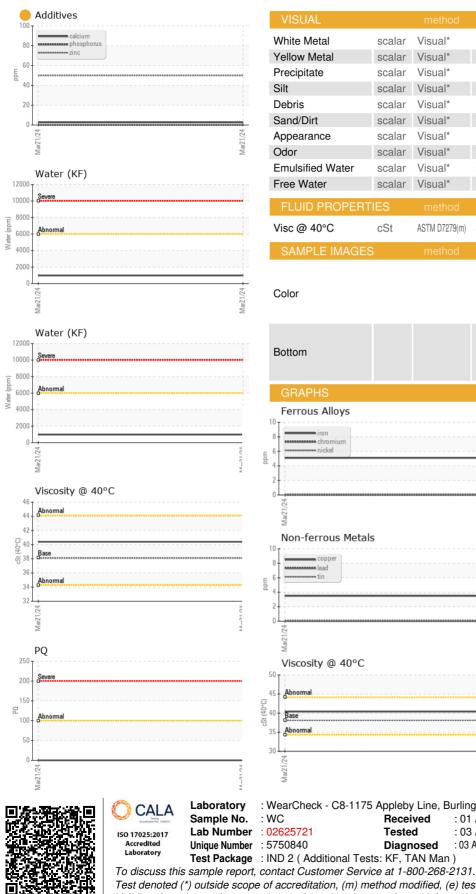

VLITE Visual\* NONE NORML Visual\* NORML NORML NORML scalar Visual\* Visual\* >0.6 NEG scalar Visual\* NEG ASTM D7279(m) 38.1 40.4 no image no image no image no image PQ 220 200 180 160 140 Mar21/24 120 g 100 80 60 40 20 Mar21/24 Aar21 Acid Number (<sup>B</sup>/HOX 2.00 Ē 1.50 Abr Acid Nu 0.50 Base 0.00 Mar21/24 -Mar21 AV GROUP NB INC. : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 103 PINDER ROAD,, NACKAWIC MILL Received : 01 Apr 2024 Tested NACKAWIC, NB : 03 Apr 2024 : 03 Apr 2024 - Kevin Marson CA E6G 1W4 Diagnosed Contact: Jeremy Sharp Jeremy.Sharp@adityabirla.com Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab. T: F: Validity of results and interpretation are based on the sample and information as supplied. Contact/Location: Jeremy Sharp - STANAC

NONE

Visual\*

Visual\*

Visual\*

Visual\*