



OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id
FLA-ATFMVLV PD-032824-3

Component
Unknown Component
Fluid
{not provided} (--- GAL)

DIAGNOSIS

Recommendation

This is a baseline read-out on the submitted sample.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PP	---	---
Sample Date	Client Info			31 Mar 2024	---	---
Machine Age	hrs Client Info			0	---	---
Oil Age	hrs Client Info			0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				NORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method			NEG	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)		1	---	---
Chromium	ppm	ASTM D5185(m)		0	---	---
Nickel	ppm	ASTM D5185(m)		0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)		0	---	---
Lead	ppm	ASTM D5185(m)		0	---	---
Copper	ppm	ASTM D5185(m)		0	---	---
Tin	ppm	ASTM D5185(m)		0	---	---
Antimony	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
Beryllium	ppm	ASTM D5185(m)		0	---	---
Cadmium	ppm	ASTM D5185(m)		0	---	---




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		70	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		0	---	---
Calcium	ppm	ASTM D5185(m)		75	---	---
Phosphorus	ppm	ASTM D5185(m)		146	---	---
Zinc	ppm	ASTM D5185(m)		1	---	---
Sulfur	ppm	ASTM D5185(m)		1530	---	---
Lithium	ppm	ASTM D5185(m)		<1	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)		2	---	---
Sodium	ppm	ASTM D5185(m)		<1	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Precipitate	scalar	Visual*	NONE	NONE	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---



OIL ANALYSIS REPORT

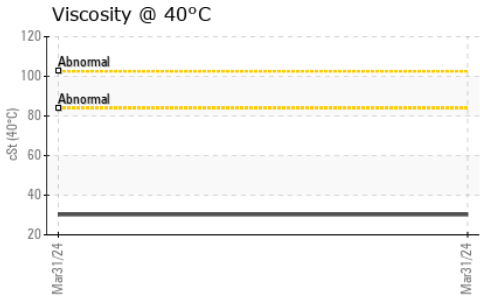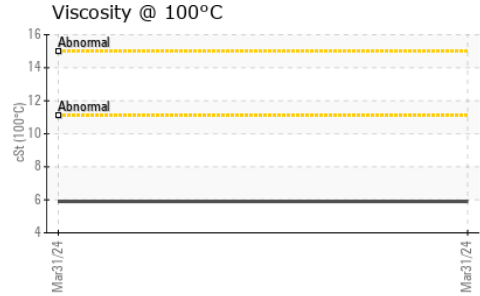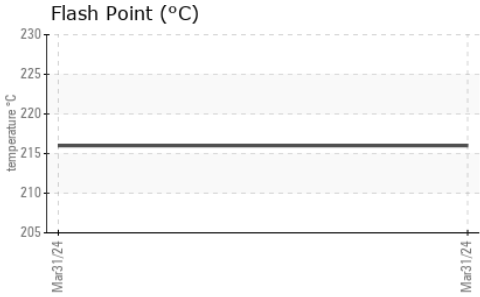

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	30.2	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	5.9	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	143	---	---
Pour Point	°C	ASTM D97*	-48	---	---
COC Flash Point	°C	ASTM D92*	216	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PP
Lab Number : **02625864**
Unique Number : 5758996
Test Package : TEST (Additional Tests: COC Flash, ICP, KV100, KV40, PourPt, VI)

FORSYTHE LUBRICATION
 120 CHATHAM ST.
 HAMILTON, ON
 CA L8P 2B5
 Contact: HEIDI LEINGARTNER

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (905)525-7192
 F: (905)525-7024