


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

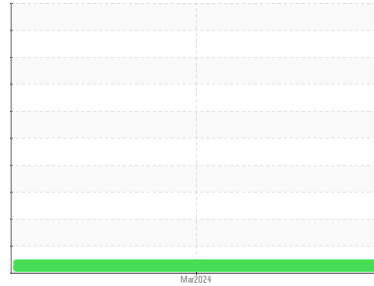

Area  
**[WS5586N1488342]**  
Machine Id  
**INTERNATIONAL 273936**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WA0021294</b>	---	---
Sample Date	Client Info		<b>26 Mar 2024</b>	---	---
Machine Age	hrs	Client Info	<b>325</b>	---	---
Oil Age	hrs	Client Info	<b>30</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.0	<b>&lt;1.0</b>	---	---
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >140	<b>2</b>	---	---
Chromium	ppm	ASTM D5185(m) >4	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m) >4	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Silver	ppm	ASTM D5185(m) >3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m) >12	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185(m) >20	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m) >50	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m) >4	<b>0</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)	<b>13</b>	---	---
Barium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	<b>55</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)	<b>926</b>	---	---
Calcium	ppm	ASTM D5185(m)	<b>1111</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	<b>985</b>	---	---
Zinc	ppm	ASTM D5185(m)	<b>1164</b>	---	---
Sulfur	ppm	ASTM D5185(m)	<b>2586</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>1</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>1</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>&lt;1</b>	---	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624* >20	<b>4.8</b>	---	---
Sulfation	Abs./1mm	ASTM D7415* >30	<b>18.2</b>	---	---

# OIL ANALYSIS REPORT

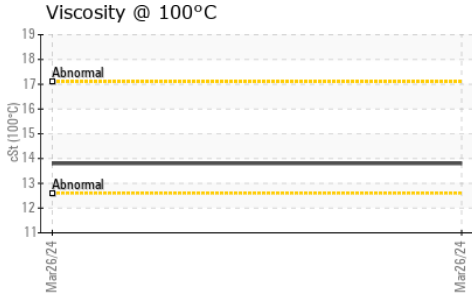

### FLUID DEGRADATION

Method	Limit/Base	Current	History1	History2
Oxidation	Abs./1mm ASTM D7414*	13.6	---	---


### VISUAL

Method	Limit/Base	Current	History1	History2
Emulsified Water	scalar Visual*	NEG	---	---
Free Water	scalar Visual*	NEG	---	---

### FLUID PROPERTIES

Method	Limit/Base	Current	History1	History2
Visc @ 100°C	cSt ASTM D7279(m)	13.8	---	---

### GRAPHS

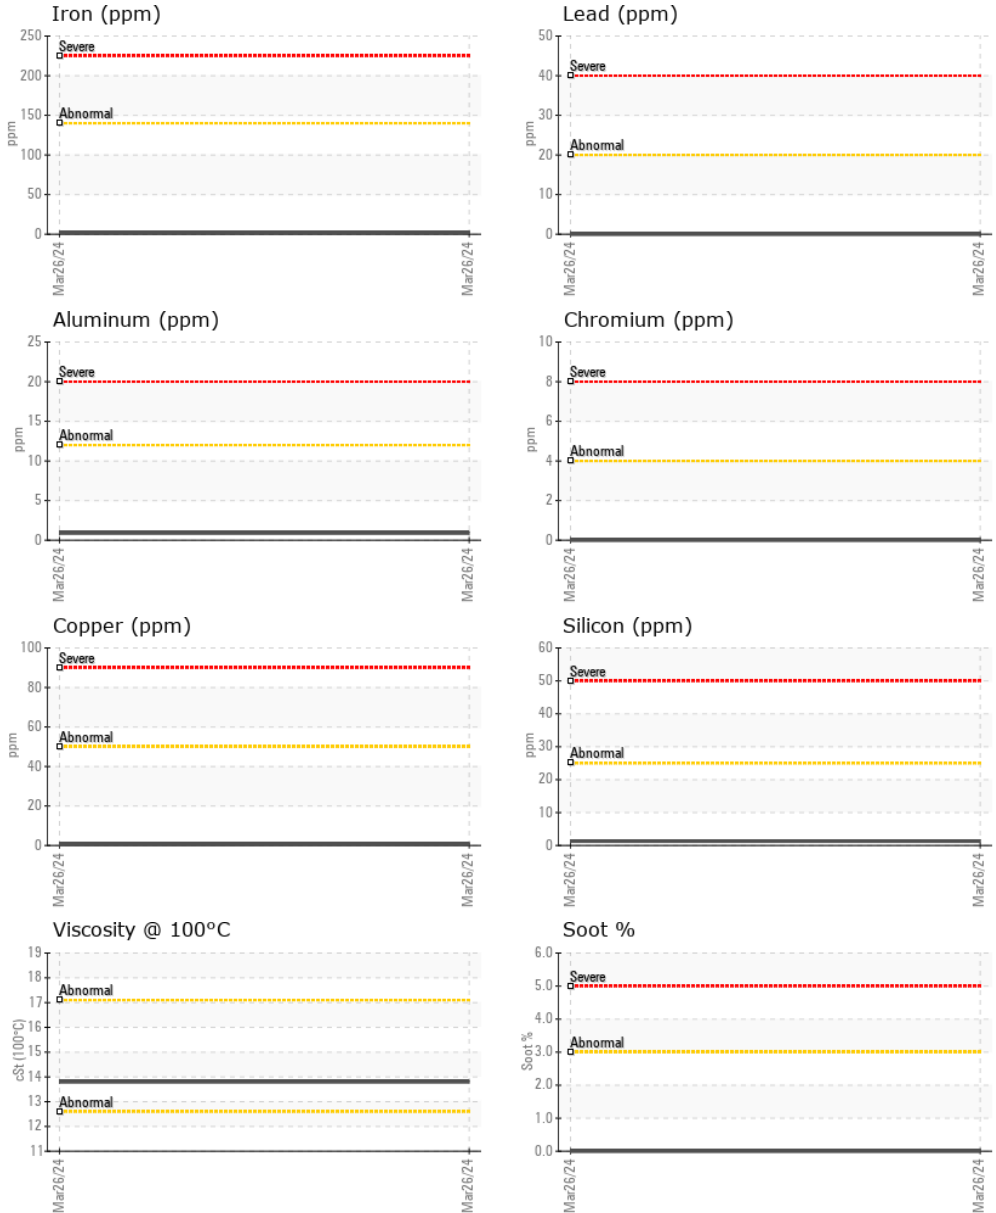

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WA0021294  
**Lab Number** : 02626024  
**Unique Number** : 5759156  
**Test Package** : MOB 1  
**Received** : 02 Apr 2024  
**Tested** : 02 Apr 2024  
**Diagnosed** : 02 Apr 2024 - Wes Davis

**Wajax Power Systems**  
 70 Raddall Avenue  
 Dartmouth, NS  
 CA B3B 1T7  
 Contact: Danelle Hoffman  
 dhoffman@wajax.com  
 T: (902)468-6200  
 F: (902)468-3325

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.