




OIL ANALYSIS REPORT

Sample Rating Trend

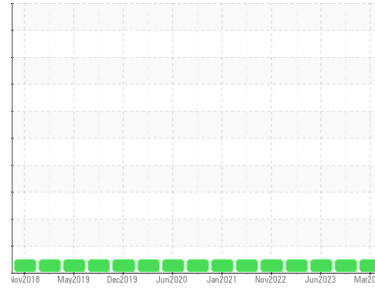

NORMAL



Area
52000 series
 Machine Id
Navistar 52816

Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (40 LTR)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0915055	WC0864522	WC0817371
Sample Date	Client Info		26 Mar 2024	05 Dec 2023	08 Jun 2023
Machine Age	mls	Client Info	493669	465595	437292
Oil Age	mls	Client Info	28074	38303	20036
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>100	33	37	23
Chromium	ppm	ASTM D5185(m)	>20	2	2	2
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>20	6	6	4
Lead	ppm	ASTM D5185(m)	>40	0	1	<1
Copper	ppm	ASTM D5185(m)	>330	3	6	4
Tin	ppm	ASTM D5185(m)	>15	0	<1	<1
Antimony	ppm	ASTM D5185(m)		0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
Beryllium	ppm	ASTM D5185(m)		0	0	0
Cadmium	ppm	ASTM D5185(m)		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2	2	1	1
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	50	64	64	62
Manganese	ppm	ASTM D5185(m)	0	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	950	1021	1010	1008
Calcium	ppm	ASTM D5185(m)	1050	1096	1129	1063
Phosphorus	ppm	ASTM D5185(m)	995	1025	1022	1123
Zinc	ppm	ASTM D5185(m)	1180	1222	1245	1208
Sulfur	ppm	ASTM D5185(m)	2600	2490	2521	2572
Lithium	ppm	ASTM D5185(m)		<1	<1	<1

CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	6	7	6
Sodium	ppm	ASTM D5185(m)		2	3	2
Potassium	ppm	ASTM D5185(m)	>20	1	1	<1

INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>3	1.4	1.9	0.8
Nitration	Abs/cm	ASTM D7624*	>20	9.9	10.9	8.0
Sulfation	Abs./1mm	ASTM D7415*	>30	21.7	23.7	20.0



OIL ANALYSIS REPORT








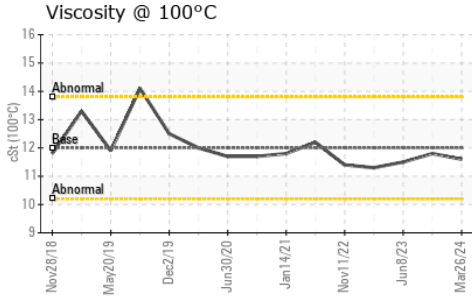


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs./1mm	ASTM D7414*	>25	16.1	17.5	14.8

VISUAL		method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
Free Water	scalar	Visual*		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.6	11.8	11.5

GRAPHS

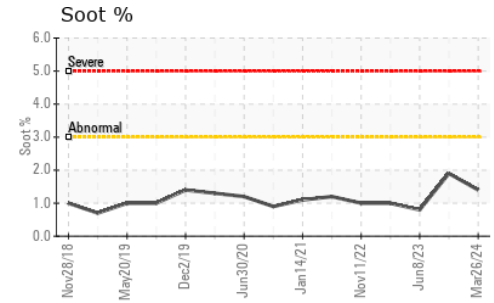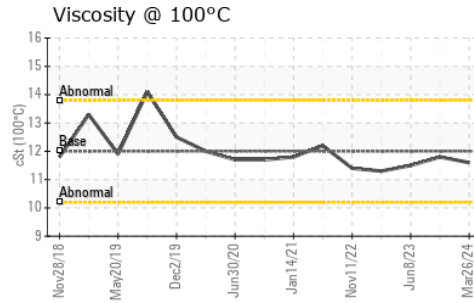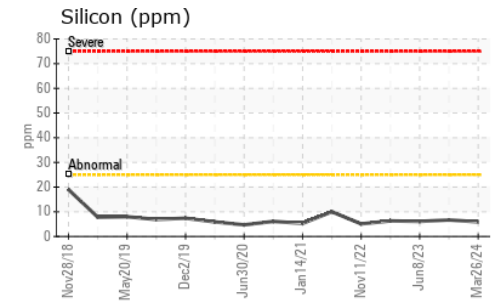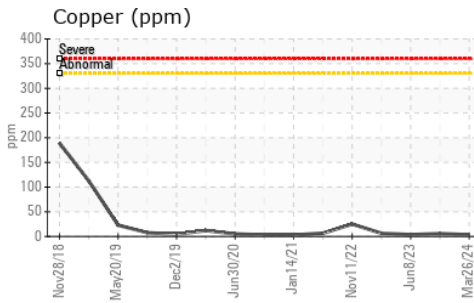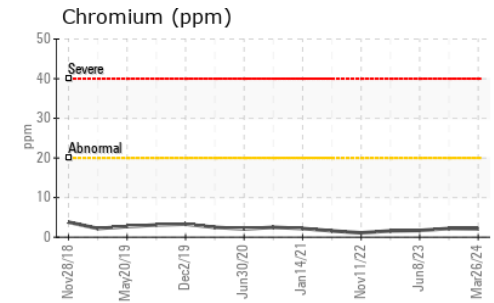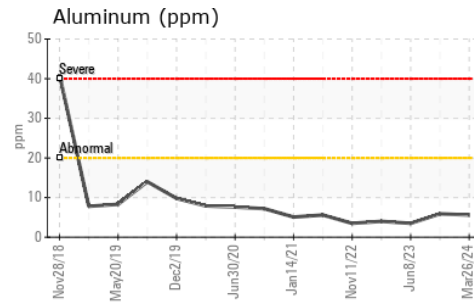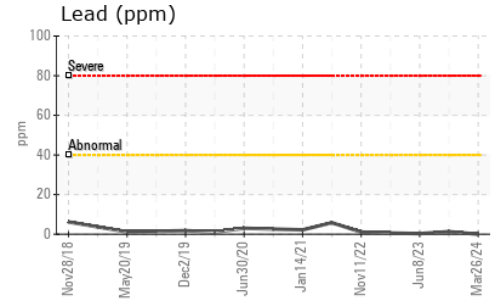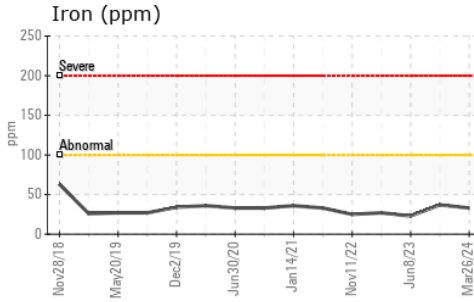

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0915055
Lab Number : **02626363**
Unique Number : 5759495
Test Package : MOB 1

MANITOU LIN TRANSPORT (GARAGE)
 1335 SHAWSON DRIVE
 MISSISSAUGA, ON
 CA L4W 1C4
 Contact: Travis Spence
 tspence@manitoulintransport.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
 F: (905)564-6361