




# OIL ANALYSIS REPORT

Sample Rating Trend

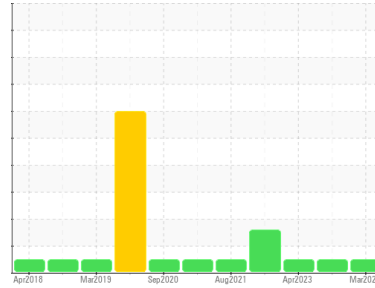

**NORMAL**



Area  
**3000 Series**  
 Machine Id  
**Freightliner 3816T**

Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (26 LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0915046</b>	WC0848039	WC0786009
Sample Date	Client Info		<b>23 Mar 2024</b>	07 Oct 2023	08 Apr 2023
Machine Age	mls	Client Info	<b>191824</b>	180644	166629
Oil Age	mls	Client Info	<b>11125</b>	14070	14586
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185(m)	>75	<b>35</b>	47	40
Chromium	ppm	ASTM D5185(m)	>5	<b>1</b>	2	1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>15	<b>11</b>	15	13
Lead	ppm	ASTM D5185(m)	>25	<b>0</b>	1	0
Copper	ppm	ASTM D5185(m)	>100	<b>8</b>	38	3
Tin	ppm	ASTM D5185(m)	>4	<b>0</b>	0	<1
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185(m)	2	<b>1</b>	2	2
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)	50	<b>63</b>	63	63
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	950	<b>988</b>	966	979
Calcium	ppm	ASTM D5185(m)	1050	<b>1085</b>	1057	1194
Phosphorus	ppm	ASTM D5185(m)	995	<b>943</b>	951	1089
Zinc	ppm	ASTM D5185(m)	1180	<b>1210</b>	1223	1244
Sulfur	ppm	ASTM D5185(m)	2600	<b>2324</b>	2267	2587
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

## CONTAMINANTS


	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185(m)	>25	<b>4</b>	7	8
Sodium	ppm	ASTM D5185(m)		<b>2</b>	3	2
Potassium	ppm	ASTM D5185(m)	>20	<b>11</b>	16	13

## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	ASTM D7844*	>6	<b>0.9</b>	1.1	0.9
Nitration	Abs/cm	ASTM D7624*	>20	<b>13.6</b>	14.2	13.6
Sulfation	Abs./1mm	ASTM D7415*	>30	<b>25.6</b>	28.5	28.4



# OIL ANALYSIS REPORT








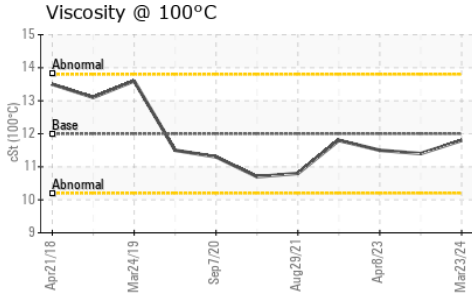


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Oxidation	Abs./1mm	ASTM D7414*	>25	<b>22.4</b>	26.8	21.9

VISUAL	method	limit/base	current	history1	history2	
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	<b>11.8</b>	11.4	11.5

## GRAPHS

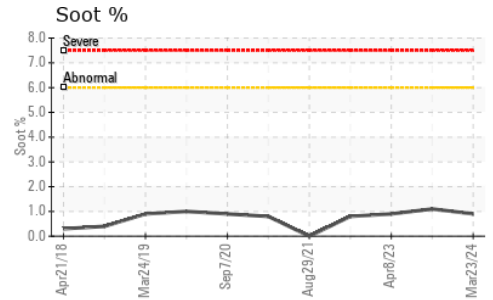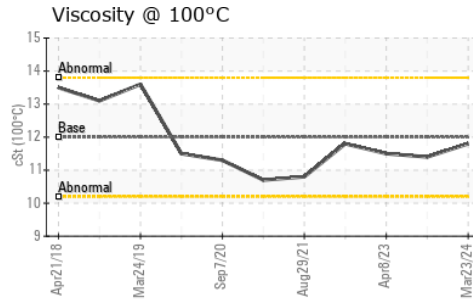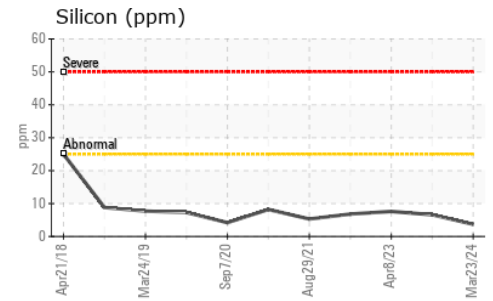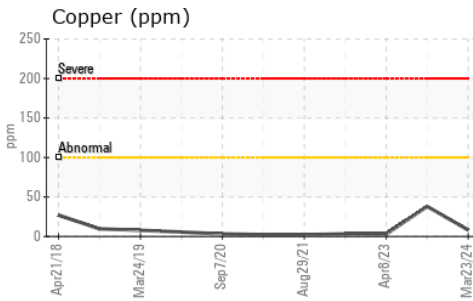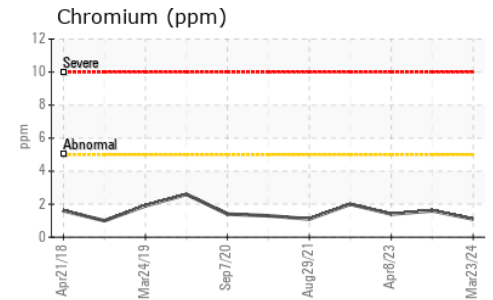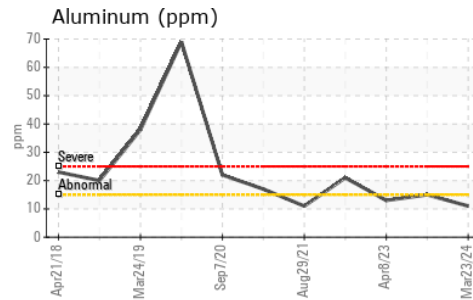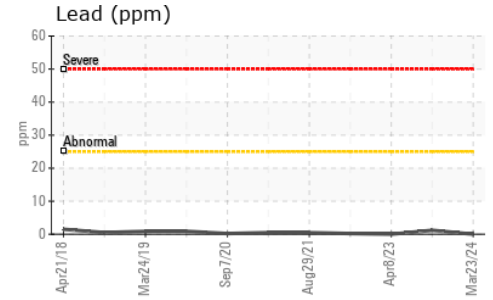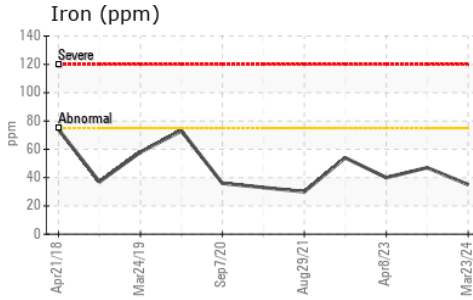

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0915046  
**Lab Number** : 02626388  
**Unique Number** : 5759520  
**Test Package** : MOB 1  
**Received** : 03 Apr 2024  
**Tested** : 03 Apr 2024  
**Diagnosed** : 03 Apr 2024 - Wes Davis

**MANITOULIN TRANSPORT (GARAGE)**  
 1335 SHAWSON DRIVE  
 MISSISSAUGA, ON  
 CA L4W 1C4  
 Contact: Travis Spence  
 tspence@manitoulintransport.com  
 T:  
 F: (905)564-6361

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.