



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area

[67109]

Machine Id


**VOLVO VNL740 4704**

Component

**Diesel Engine**

Fluid

**DIESEL ENGINE OIL SAE 10W30 (--- GAL)**

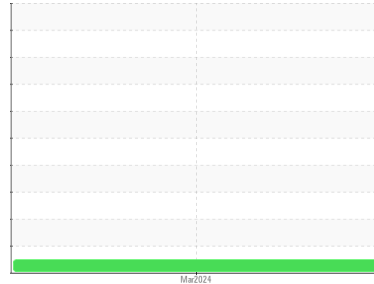

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

Fuel content negligible. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0909031</b>	---	---
Sample Date	Client Info		<b>28 Mar 2024</b>	---	---
Machine Age	kms	Client Info	<b>85342</b>	---	---
Oil Age	kms	Client Info	<b>0</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m) >100	<b>75</b>	---	---
Chromium	ppm	ASTM D5185(m) >20	<b>1</b>	---	---
Nickel	ppm	ASTM D5185(m) >2	<b>4</b>	---	---
Titanium	ppm	ASTM D5185(m)	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185(m) >2	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185(m) >25	<b>28</b>	---	---
Lead	ppm	ASTM D5185(m) >40	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m) >330	<b>18</b>	---	---
Tin	ppm	ASTM D5185(m) >15	<b>4</b>	---	---
Antimony	ppm	ASTM D5185(m)	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Beryllium	ppm	ASTM D5185(m)	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185(m)	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m) 250	<b>34</b>	---	---
Barium	ppm	ASTM D5185(m) 10	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m) 100	<b>115</b>	---	---
Manganese	ppm	ASTM D5185(m)	<b>3</b>	---	---
Magnesium	ppm	ASTM D5185(m) 450	<b>654</b>	---	---
Calcium	ppm	ASTM D5185(m) 3000	<b>1539</b>	---	---
Phosphorus	ppm	ASTM D5185(m) 1150	<b>680</b>	---	---
Zinc	ppm	ASTM D5185(m) 1350	<b>812</b>	---	---
Sulfur	ppm	ASTM D5185(m) 4250	<b>1822</b>	---	---
Lithium	ppm	ASTM D5185(m)	<b>1</b>	---	---

## CONTAMINANTS




	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m) >25	<b>51</b>	---	---
Sodium	ppm	ASTM D5185(m)	<b>5</b>	---	---
Potassium	ppm	ASTM D5185(m) >20	<b>71</b>	---	---
Fuel	%	ASTM D7593* >6.0	<b>0.7</b>	---	---

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	ASTM D7844* >3	<b>0.3</b>	---	---
Nitration	Abs/cm	ASTM D7624* >20	<b>12.5</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415* >30	<b>26.0</b>	---	---



# OIL ANALYSIS REPORT

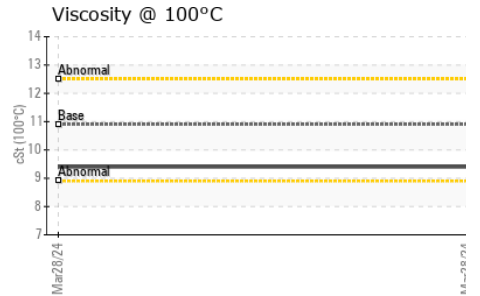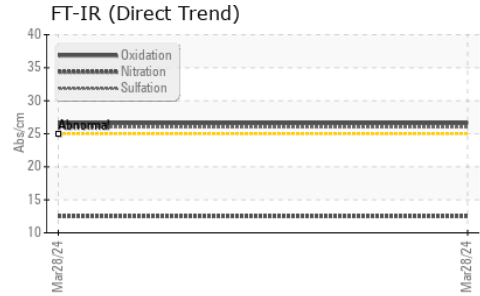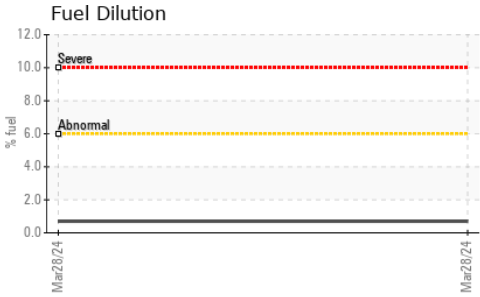

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	ASTM D7414*	>25	26.6	---









### VISUAL

	method	limit/base	current	history1	history2
Emulsified Water	scalar	Visual*	>0.2	NEG	---
Free Water	scalar	Visual*		NEG	---

### FLUID PROPERTIES

	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	9.4	---

### GRAPHS

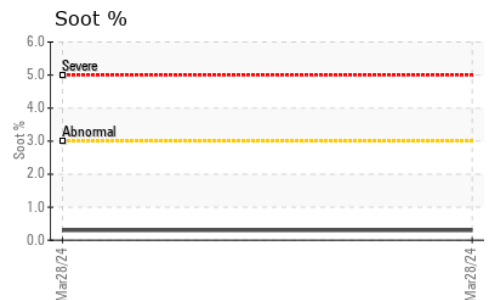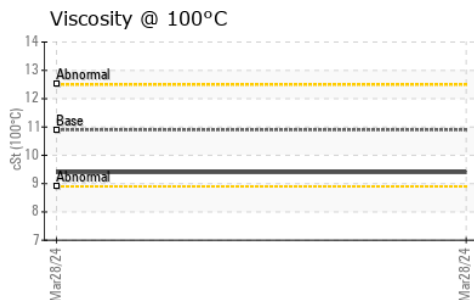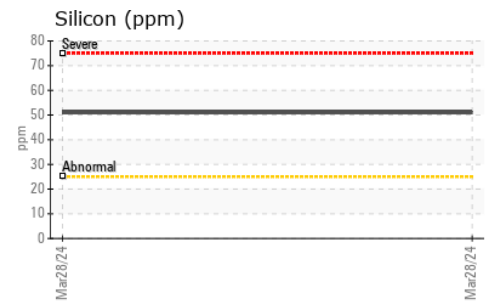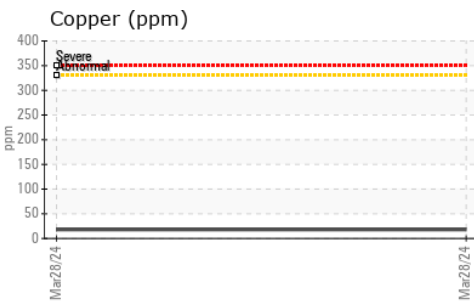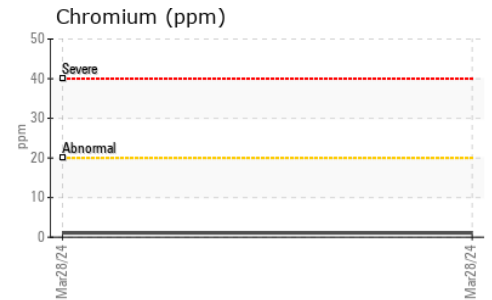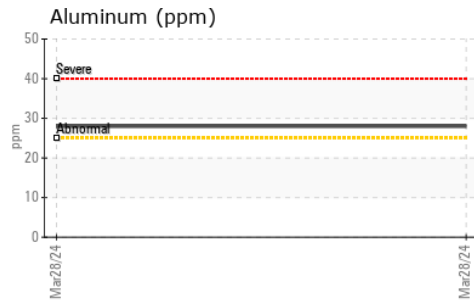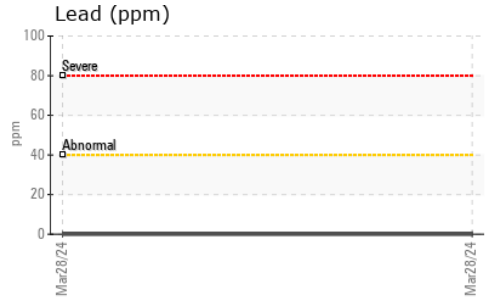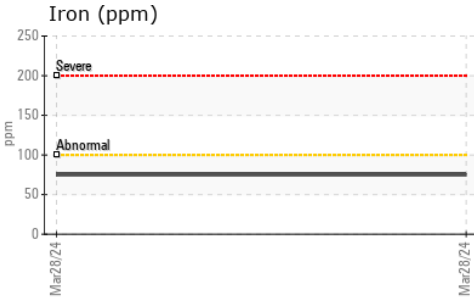

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **PERFORMANCE EQUIPMENT - VISION TRUCK**  
**Sample No.** : WC0909031 **Received** : 03 Apr 2024 415 EVANS AVENUE  
**Lab Number** : 02626397 **Tested** : 04 Apr 2024 ETOBICOKE, ON  
**Unique Number** : 5759529 **Diagnosed** : 04 Apr 2024 - Kevin Marson CA M8W 0B3  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, PercentFuel ) Contact: Service

To discuss this sample report, contact Customer Service at 1-800-268-2131.

Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.

Validity of results and interpretation are based on the sample and information as supplied.

etobservice@visiontruckgroup.com

T:

F: