




OIL ANALYSIS REPORT

Sample Rating Trend

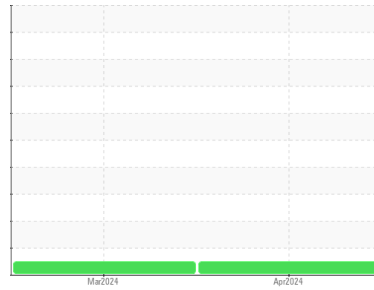

NORMAL



Area

Red oil room/Rig 2

Machine Id

DEC 3983

Component

Hydraulic System

Fluid

LANXESS ROYCO 756 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please note that this is a corrected copy for data entry updates.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0926851	WC0920416	---
Sample Date	Client Info			03 Apr 2024	12 Mar 2024	---
Machine Age	hrs	Client Info		0	0	---
Oil Age	hrs	Client Info		0	0	---
Oil Changed	Client Info			N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>20	0	0	---
Chromium	ppm	ASTM D5185(m)	>20	0	0	---
Nickel	ppm	ASTM D5185(m)	>20	0	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		0	0	---
Aluminum	ppm	ASTM D5185(m)	>20	0	<1	---
Lead	ppm	ASTM D5185(m)	>20	0	0	---
Copper	ppm	ASTM D5185(m)	>20	0	<1	---
Tin	ppm	ASTM D5185(m)	>20	0	0	---
Antimony	ppm	ASTM D5185(m)		0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
Beryllium	ppm	ASTM D5185(m)		0	0	---
Cadmium	ppm	ASTM D5185(m)		0	0	---





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		0	0	---
Barium	ppm	ASTM D5185(m)	0	4	5	---
Molybdenum	ppm	ASTM D5185(m)		0	0	---
Manganese	ppm	ASTM D5185(m)		0	0	---
Magnesium	ppm	ASTM D5185(m)		<1	<1	---
Calcium	ppm	ASTM D5185(m)		0	<1	---
Phosphorus	ppm	ASTM D5185(m)		426	440	---
Zinc	ppm	ASTM D5185(m)		<1	<1	---
Sulfur	ppm	ASTM D5185(m)		98	94	---
Lithium	ppm	ASTM D5185(m)		<1	<1	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>15	0	0	---
Sodium	ppm	ASTM D5185(m)		0	<1	---
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	727	418	---
Particles >6µm		ASTM D7647	>1300	166	100	---
Particles >14µm		ASTM D7647	>160	20	7	---
Particles >21µm		ASTM D7647	>40	8	2	---
Particles >38µm		ASTM D7647	>10	1	0	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/15/11	16/14/10	---



OIL ANALYSIS REPORT

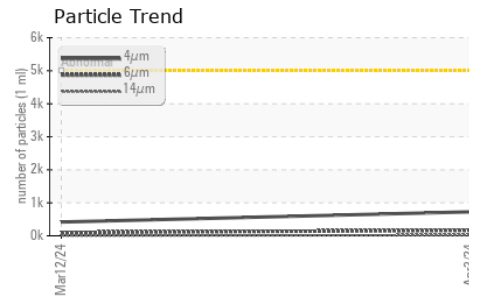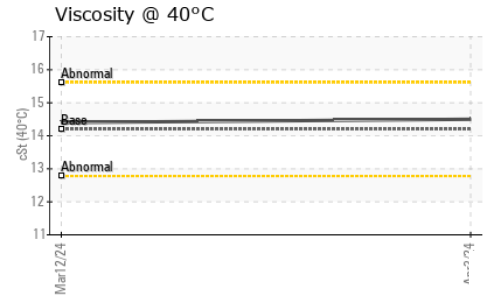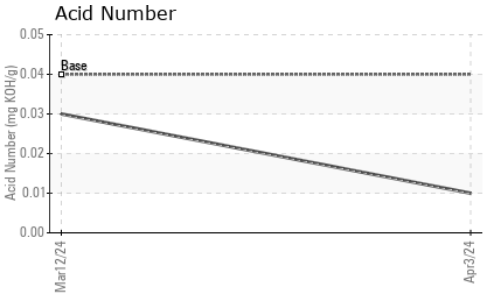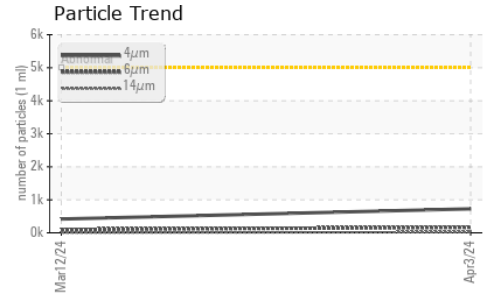

FLUID DEGRADATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D974*	0.04	0.01	0.03	---

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Precipitate	scalar	Visual*	NONE	NONE	NONE	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	---
Free Water	scalar	Visual*		NEG	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D7279(m)	14.2	14.5	14.4	---

SAMPLE IMAGES

method	limit/base	current	history1	history2	
Color					no image
Bottom					no image

GRAPHS

method	limit/base	current	history1	history2	
Ferrous Alloys	ppm				
Non-ferrous Metals	ppm				
Particle Count	number of particles (per 1 ml)				
Acid Number	Acid Number (mg KOH/g)				
Viscosity @ 40°C	cSt (40°C)				



Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0926851 **Received** : 04 Apr 2024
Lab Number : **02626606** **Tested** : 15 Apr 2024
Unique Number : 5759738 **Diagnosed** : 15 Apr 2024 - Kevin Marson
Test Package : IND 2

Safran Landing Systems
 574 Monarch Ave
 Ajax, ON
 CA L1S 2G8
 Contact: Stuart Potter
 stuart.potter@safrangroup.com
 T:
 F: (905)683-6983

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.