




# OIL ANALYSIS REPORT

Sample Rating Trend

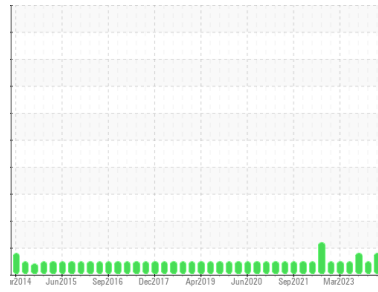

ISO



Area

## Plastisol Line

Machine Id

## Plastisol Embosser Hydraulic Pump (S/N 59-0835)

Component

### Hydraulic System

Fluid

### SUNOCO SUNVIS 846 ISO 46 (12 GAL)

#### DIAGNOSIS

##### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

##### Wear

All component wear rates are normal.

##### Contamination

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

##### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION |             | method      | limit/base | current            | history1    | history2    |
|--------------------|-------------|-------------|------------|--------------------|-------------|-------------|
| Sample Number      | Client Info |             |            | <b>WC0867489</b>   | WC0837280   | WC0837268   |
| Sample Date        | Client Info |             |            | <b>21 Mar 2024</b> | 04 Jan 2024 | 04 Oct 2023 |
| Machine Age        | hrs         | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Age            | hrs         | Client Info |            | <b>0</b>           | 0           | 0           |
| Oil Changed        | Client Info |             |            | <b>N/A</b>         | N/A         | N/A         |
| Sample Status      |             |             |            | <b>ATTENTION</b>   | NORMAL      | ATTENTION   |

| CONTAMINATION |           | method | limit/base | current    | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Water         | WC Method |        | >0.05      | <b>NEG</b> | NEG      | NEG      |





| WEAR METALS |     | method        | limit/base | current      | history1 | history2 |
|-------------|-----|---------------|------------|--------------|----------|----------|
| Iron        | ppm | ASTM D5185(m) | >20        | <b>&lt;1</b> | <1       | <1       |
| Chromium    | ppm | ASTM D5185(m) | >20        | <b>0</b>     | 0        | 0        |
| Nickel      | ppm | ASTM D5185(m) | >20        | <b>0</b>     | 0        | 0        |
| Titanium    | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Silver      | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | <1       |
| Aluminum    | ppm | ASTM D5185(m) | >20        | <b>0</b>     | <1       | 0        |
| Lead        | ppm | ASTM D5185(m) | >20        | <b>0</b>     | <1       | <1       |
| Copper      | ppm | ASTM D5185(m) | >20        | <b>2</b>     | 2        | 2        |
| Tin         | ppm | ASTM D5185(m) | >20        | <b>0</b>     | 0        | 0        |
| Antimony    | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Vanadium    | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Beryllium   | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Cadmium     | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |

| ADDITIVES  |     | method        | limit/base | current      | history1 | history2 |
|------------|-----|---------------|------------|--------------|----------|----------|
| Boron      | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | <1       |
| Barium     | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | <1       |
| Molybdenum | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Manganese  | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Magnesium  | ppm | ASTM D5185(m) |            | <b>&lt;1</b> | <1       | <1       |
| Calcium    | ppm | ASTM D5185(m) |            | <b>32</b>    | 31       | 31       |
| Phosphorus | ppm | ASTM D5185(m) |            | <b>244</b>   | 245      | 250      |
| Zinc       | ppm | ASTM D5185(m) |            | <b>300</b>   | 288      | 298      |
| Sulfur     | ppm | ASTM D5185(m) |            | <b>5533</b>  | 5652     | 5442     |
| Lithium    | ppm | ASTM D5185(m) |            | <b>&lt;1</b> | <1       | <1       |

| CONTAMINANTS |     | method        | limit/base | current      | history1 | history2 |
|--------------|-----|---------------|------------|--------------|----------|----------|
| Silicon      | ppm | ASTM D5185(m) | >15        | <b>0</b>     | 0        | 0        |
| Sodium       | ppm | ASTM D5185(m) |            | <b>0</b>     | 0        | 0        |
| Potassium    | ppm | ASTM D5185(m) | >20        | <b>&lt;1</b> | 4        | 0        |

| FLUID CLEANLINESS |  | method       | limit/base | current         | history1 | history2 |
|-------------------|--|--------------|------------|-----------------|----------|----------|
| Particles >4µm    |  | ASTM D7647   | >5000      | <b>8053</b>     | 3601     | 5168     |
| Particles >6µm    |  | ASTM D7647   | >1300      | <b>1080</b>     | 568      | 839      |
| Particles >14µm   |  | ASTM D7647   | >160       | <b>33</b>       | 35       | 33       |
| Particles >21µm   |  | ASTM D7647   | >40        | <b>8</b>        | 10       | 7        |
| Particles >38µm   |  | ASTM D7647   | >10        | <b>1</b>        | 1        | 1        |
| Particles >71µm   |  | ASTM D7647   | >3         | <b>1</b>        | 0        | 0        |
| Oil Cleanliness   |  | ISO 4406 (c) | >19/17/14  | <b>20/17/12</b> | 19/16/12 | 20/17/12 |

# OIL ANALYSIS REPORT

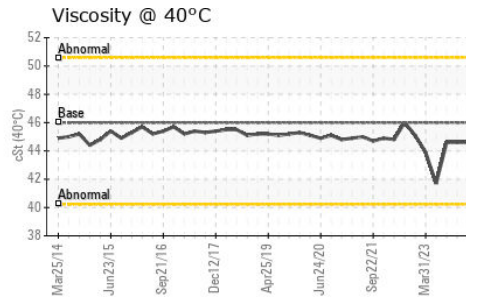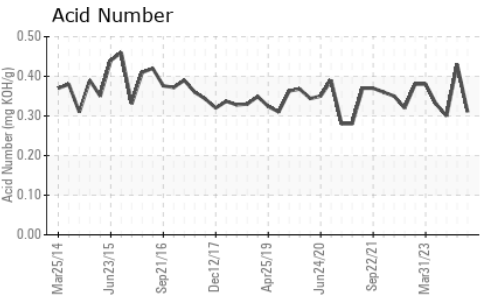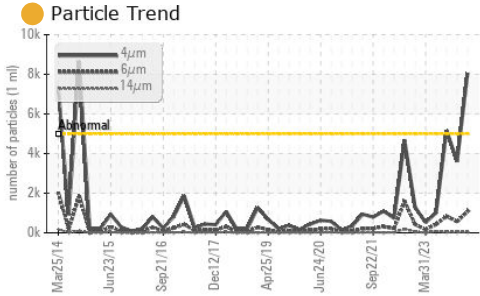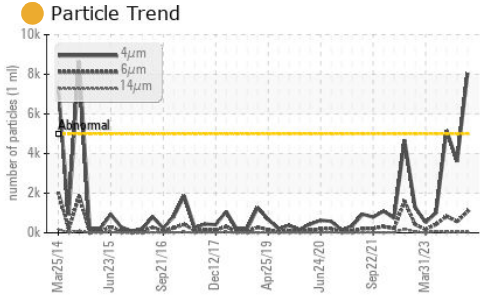


| FLUID DEGRADATION |          | method     | limit/base | current     | history1 | history2 |
|-------------------|----------|------------|------------|-------------|----------|----------|
| Acid Number (AN)  | mg KOH/g | ASTM D974* |            | <b>0.31</b> | 0.43     | 0.30     |






| VISUAL           |        | method  | limit/base | current      | history1 | history2 |
|------------------|--------|---------|------------|--------------|----------|----------|
| White Metal      | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Yellow Metal     | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Precipitate      | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Silt             | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Debris           | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Sand/Dirt        | scalar | Visual* | NONE       | <b>NONE</b>  | NONE     | NONE     |
| Appearance       | scalar | Visual* | NORML      | <b>NORML</b> | NORML    | NORML    |
| Odor             | scalar | Visual* | NORML      | <b>NORML</b> | NORML    | NORML    |
| Emulsified Water | scalar | Visual* | >0.05      | <b>NEG</b>   | NEG      | NEG      |
| Free Water       | scalar | Visual* |            | <b>NEG</b>   | NEG      | NEG      |

| FLUID PROPERTIES |     | method        | limit/base | current     | history1 | history2 |
|------------------|-----|---------------|------------|-------------|----------|----------|
| Visc @ 40°C      | cSt | ASTM D7279(m) | 46.0       | <b>44.6</b> | 44.6     | 44.6     |

| SAMPLE IMAGES |  | method | limit/base | current | history1 | history2 |
|---------------|--|--------|------------|---------|----------|----------|
|---------------|--|--------|------------|---------|----------|----------|

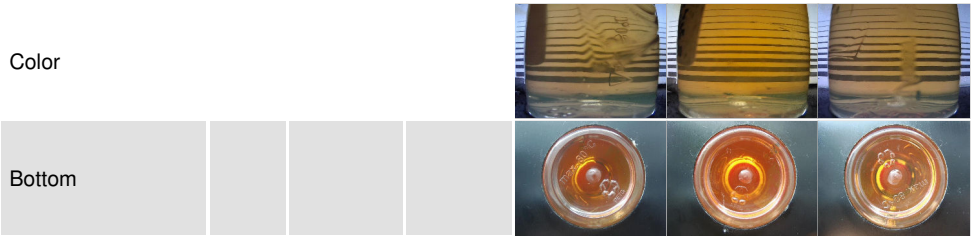

## GRAPHS

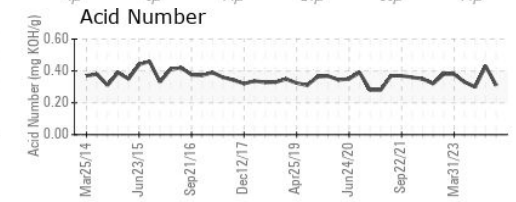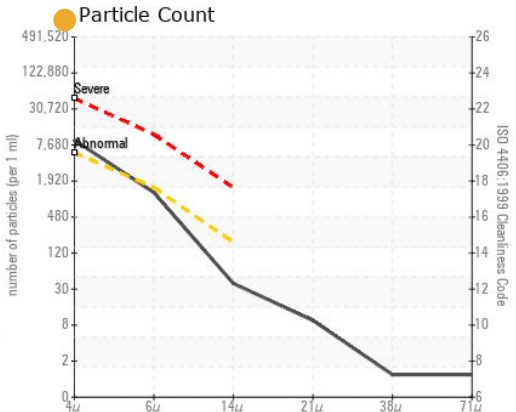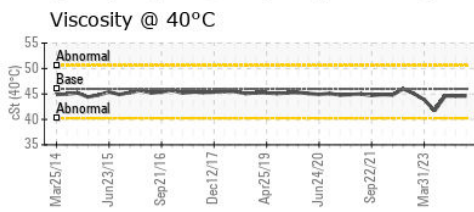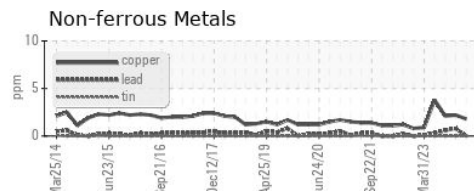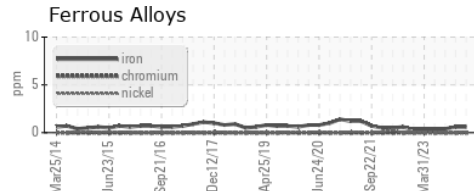

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0867489  
**Lab Number** : 02626619  
**Unique Number** : 5759751  
**Test Package** : IND 2  
**Received** : 04 Apr 2024  
**Tested** : 05 Apr 2024  
**Diagnosed** : 05 Apr 2024 - Wes Davis

**CANADIAN GENERAL TOWER LTD.**  
 52 MIDDLETON STREET, P.O. BOX 160  
 CAMBRIDGE, ON  
 CA N1S 2R4  
 Contact: Bob Abell  
 bob.abell@cgtower.com  
 T: (519)623-1630  
 F: (519)623-7018

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.