




# OIL ANALYSIS REPORT

Sample Rating Trend

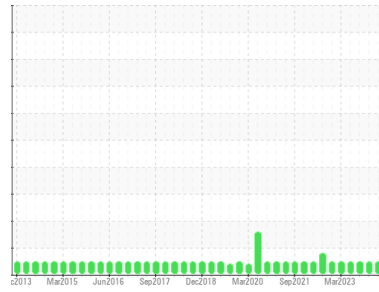

**NORMAL**



Area

**Paste Dept.**

Machine Id

**Paste Injector Hydraulic Pump (S/N 80-0090)**

Component

**Hydraulic System**

Fluid

**SUNOCO SUNVIS 846 ISO 46 (100 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0867495</b>	WC0744095	WC0808266
Sample Date	Client Info			<b>20 Mar 2024</b>	03 Jan 2024	03 Oct 2023
Machine Age	hrs	Client Info		<b>0</b>	0	0
Oil Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	<b>NEG</b>	NEG	NEG





WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	<1	<1
Chromium	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>10	<b>0</b>	<1	2
Copper	ppm	ASTM D5185(m)	>25	<b>1</b>	1	2
Tin	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Antimony	ppm	ASTM D5185(m)		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Beryllium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185(m)		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Calcium	ppm	ASTM D5185(m)		<b>6</b>	6	4
Phosphorus	ppm	ASTM D5185(m)		<b>255</b>	260	262
Zinc	ppm	ASTM D5185(m)		<b>193</b>	192	187
Sulfur	ppm	ASTM D5185(m)		<b>3597</b>	3874	3504
Lithium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185(m)	>25	<b>0</b>	<1	<1
Sodium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	4	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	<b>420</b>	1005	692
Particles >6µm		ASTM D7647	>1300	<b>83</b>	118	84
Particles >14µm		ASTM D7647	>160	<b>7</b>	7	5
Particles >21µm		ASTM D7647	>40	<b>2</b>	2	2
Particles >38µm		ASTM D7647	>10	<b>1</b>	0	1
Particles >71µm		ASTM D7647	>3	<b>1</b>	0	1
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>16/14/10</b>	17/14/10	17/14/10

# OIL ANALYSIS REPORT

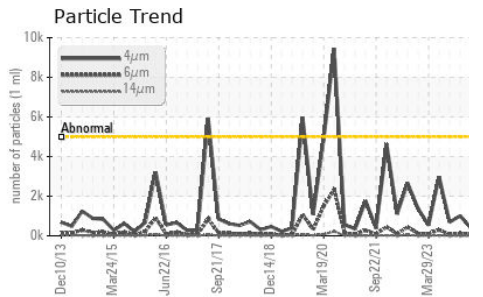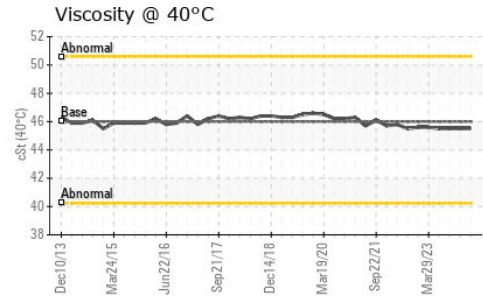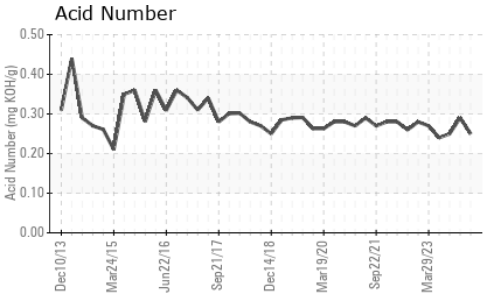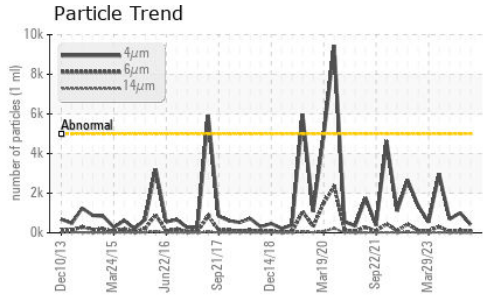


FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974*		<b>0.25</b>	0.29	0.25






VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	<b>NEG</b>	NEG	NEG
Free Water	scalar	Visual*		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D7279(m)	46.0	<b>45.5</b>	45.5	45.5

### SAMPLE IMAGES

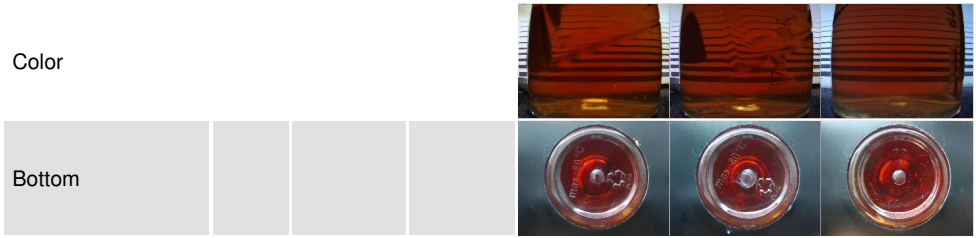

### GRAPHS

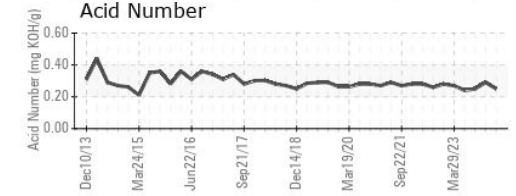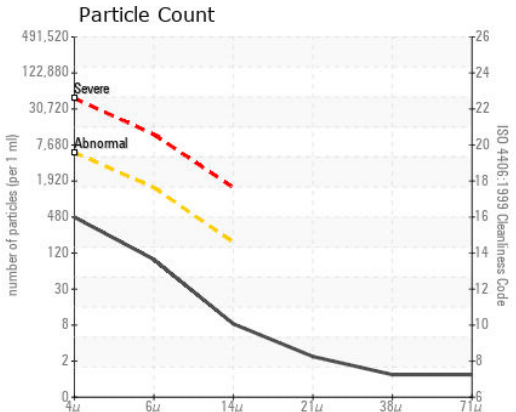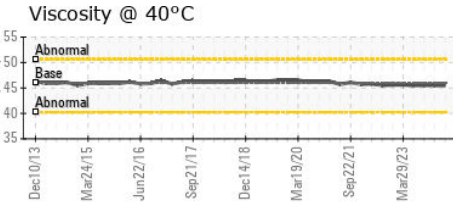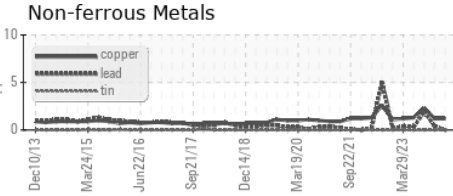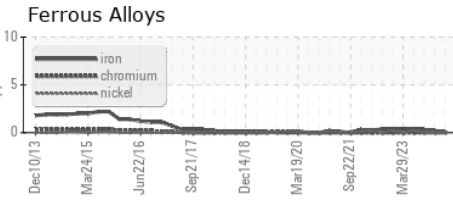

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0867495  
**Lab Number** : 02626628  
**Unique Number** : 5759760  
**Test Package** : IND 2

**CANADIAN GENERAL TOWER LTD.**  
 52 MIDDLETON STREET, P.O. BOX 160  
 CAMBRIDGE, ON  
 CA N1S 2R4  
 Contact: Bob Abell  
 bob.abell@cgtower.com  
 T: (519)623-1630  
 F: (519)623-7018

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.